



CalTestBed

Facilities Directory

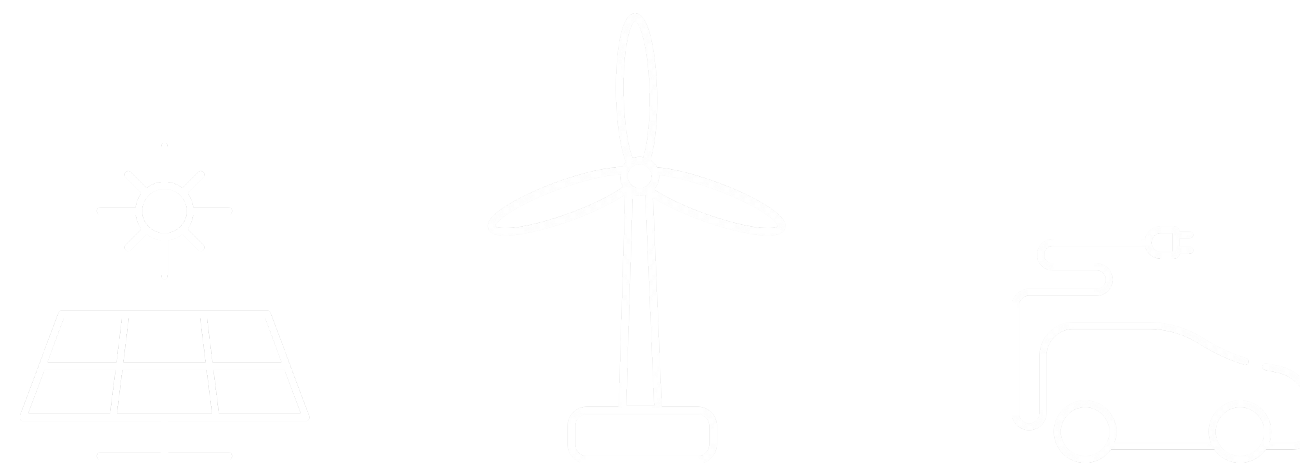


Table of Contents

- About CalTestBed 04
- CalTestBed Entrepreneurs 05
- Technology Types 06
- CalTestBed Facilities 07
 - UC Berkeley 08
 - UC Davis 17
 - UC Irvine 28
 - UCLA 48
 - UC Merced 77
 - UC Riverside 81
 - UC San Diego 130



Table of Contents


UC Santa Barbara	158
Lawrence Berkeley National Lab	176

CalTestBed



POWERED BY
**NEW
ENERGY
NEXUS**

An Initiative to De-Risk Innovations
and Accelerate Commercialization




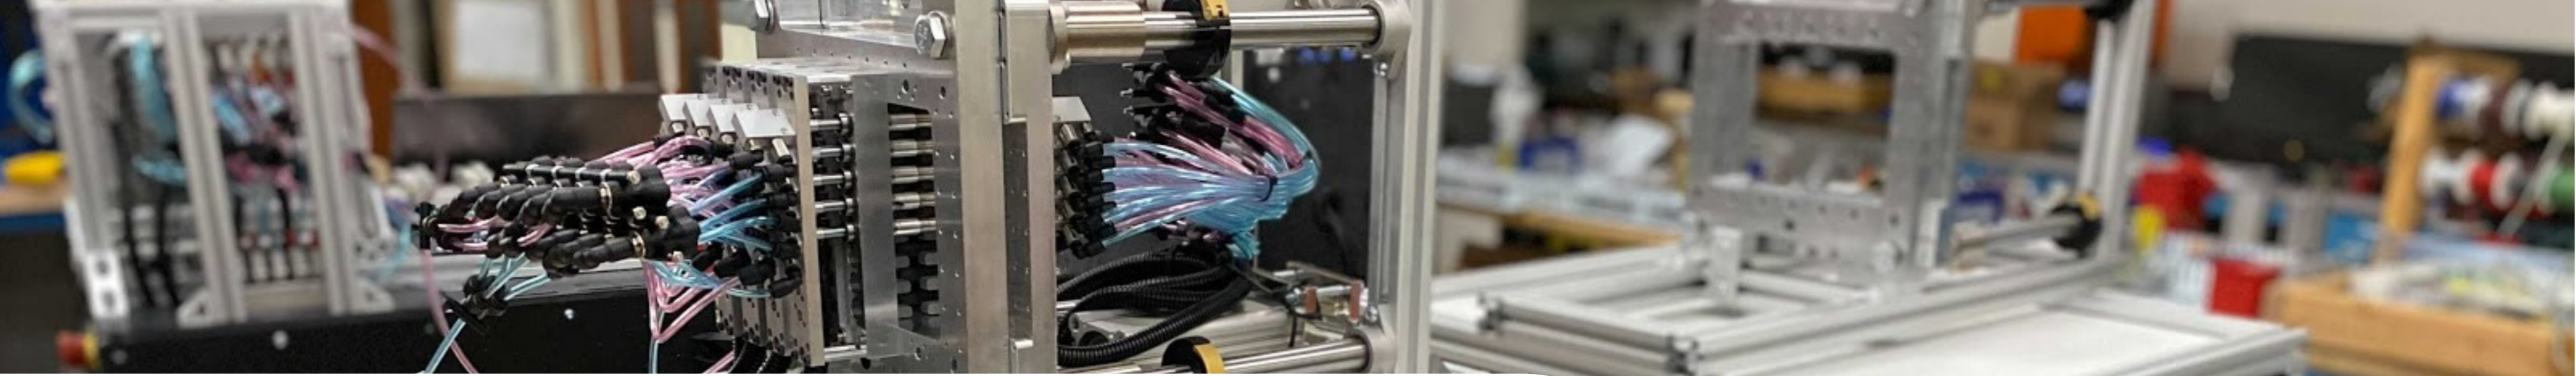

CalTestBed Entrepreneurs

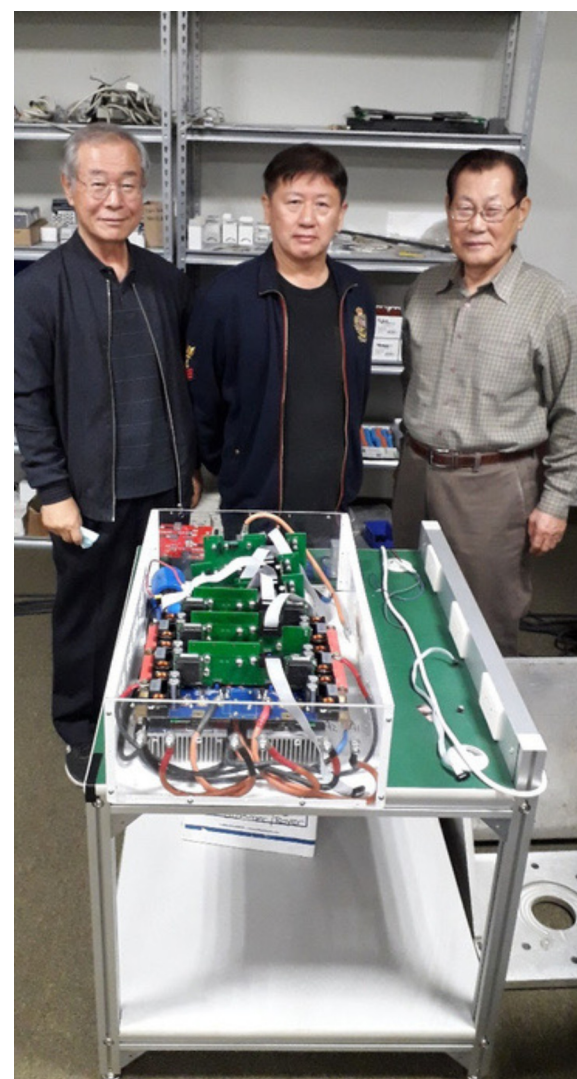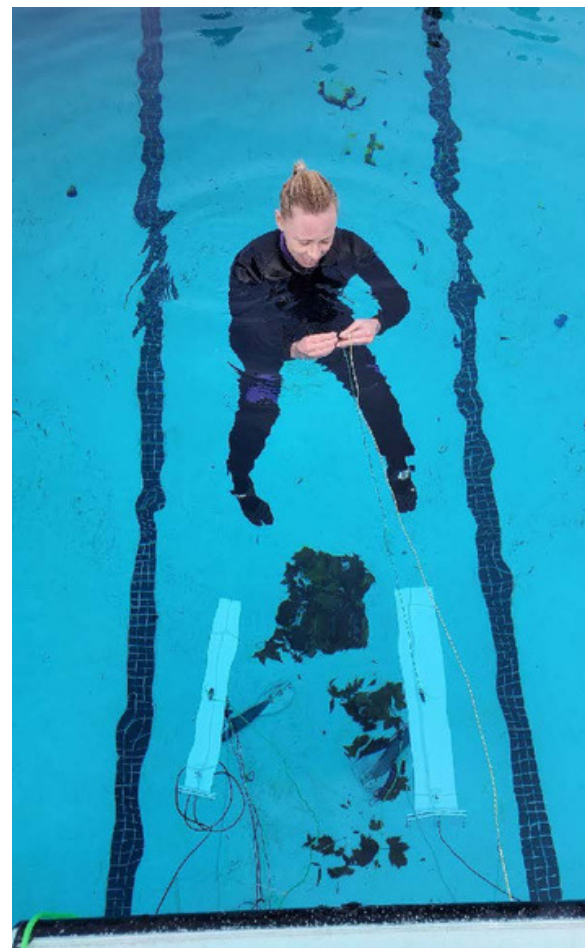

Visit the
Entrepreneur
Directory

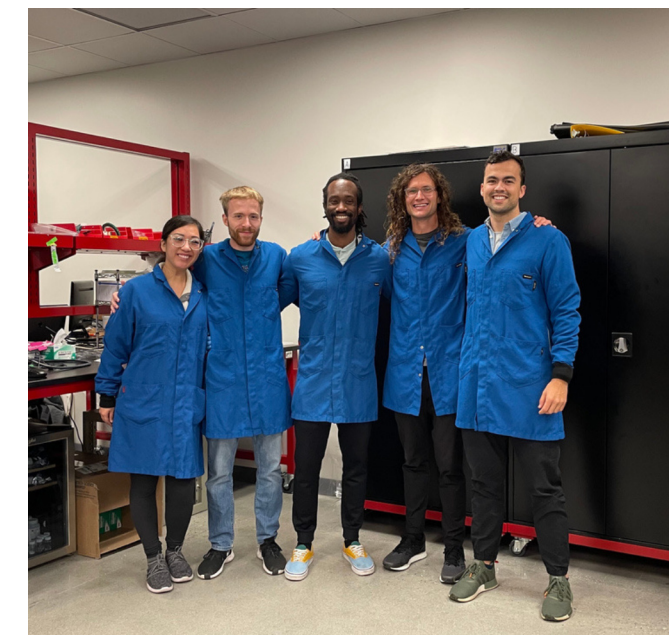

Technology Types

Building Technologies	Hardware or integrated solutions that support energy efficiency in buildings including occupancy-based controls and building management system optimization, after treatment coatings for fenestration, insulation, and building envelopes.
Energy Efficiency	Hardware or integrated solutions that demonstrate energy efficiency including appliances, solid-state lighting, non-vapor compression cooling, advanced electric heat pumps that use refrigerants with low or zero GWP.
Energy Storage	Hardware or integrated enabling technologies for lithium-metal and lithium-sulfur batteries, Ultra- or super-capacitors, Non-lithium battery chemistries, enabling technologies for green hydrogen for long duration, energy storage (including technologies such electrolyzers).
Grid Technologies	Hardware or integrated solutions that modernize the electric grid, through enabling more clean energy and energy efficiency such as demand response, distribution energy resource management systems, electric vehicle to grid integration, etc.
Industrial & Agricultural Innovation	Hardware or integrated solutions that work in industrial and/or agricultural context to enable clean energy and/or energy efficiency in industrial and agricultural processes.
Internet of Things	Hardware or integrated solutions that are used to enable clean energy or energy efficiency through the automatic acquisition, storage manipulation, management, movement, control, display, switching, interchange, transmission or reception of data.
Material-Based	Hardware or integrated solutions that utilize novel materials to enable clean energy generation or greater energy efficiency.
Renewable Generation	Hardware or integrated renewable energy technologies that advance electricity, heat, and/or fuel from renewable sources including solar, wind, heat-exchange, and bioenergy technologies.
Transportation	Hardware or integrated technologies that enable electric and alternative fuel vehicles, and related electric charging and alternative fueling infrastructure.
Water Technologies	Hardware or integrated technologies that embrace forward-thinking applications and solutions that utilize waterflow for energy generation including hydro wave, and tidal while advancing clean and safe water goals.

CalTestBed Facilities



Center for the Built Environment

UC Berkeley

Address

390 Wurster Hall
University of California Berkeley, CA 94720-1839

Ombudsperson

David Lehrer
Communications and Research Collaborations

P: 510.642.4950

E: lehrer@berkeley.edu

W: www.cbe.berkeley.edu



CBE collaborates with industry leaders to improve the performance of buildings by providing timely, unbiased research on building technologies, design strategies and operations.



Primary research program areas include:

- Building HVAC Systems
- Indoor Environments
- Building Facade Systems
- Human Interactions



Capabilities include laboratory studies, field studies, prototyping and building energy simulation.



Center for the Built Environment

UC Berkeley



Controlled Environment Chamber

This full-scale test room resembles a contemporary office while allowing precise control over temperature, humidity, ventilation, and lighting. The facility has been used for groundbreaking studies of thermal comfort, ventilation performance, and indoor air quality (with and without human subjects). Research staff have also designed and conducted numerous full-scale laboratory tests at FLEXLAB, LBNL, and other laboratories in the US and Canada.




Indoor Environment Quality (IEQ) Evaluation Toolkit

CBE uses portable instruments (mobile carts and wireless sensor networks) to conduct field studies of indoor environments and HVAC performance. CBE's unique toolkit uses a wireless mesh network with a web-based data collection, analysis, and reporting application. It allows real-time evaluation of IEQ with a focus on advanced HVAC systems.

Center for the Built Environment

UC Berkeley

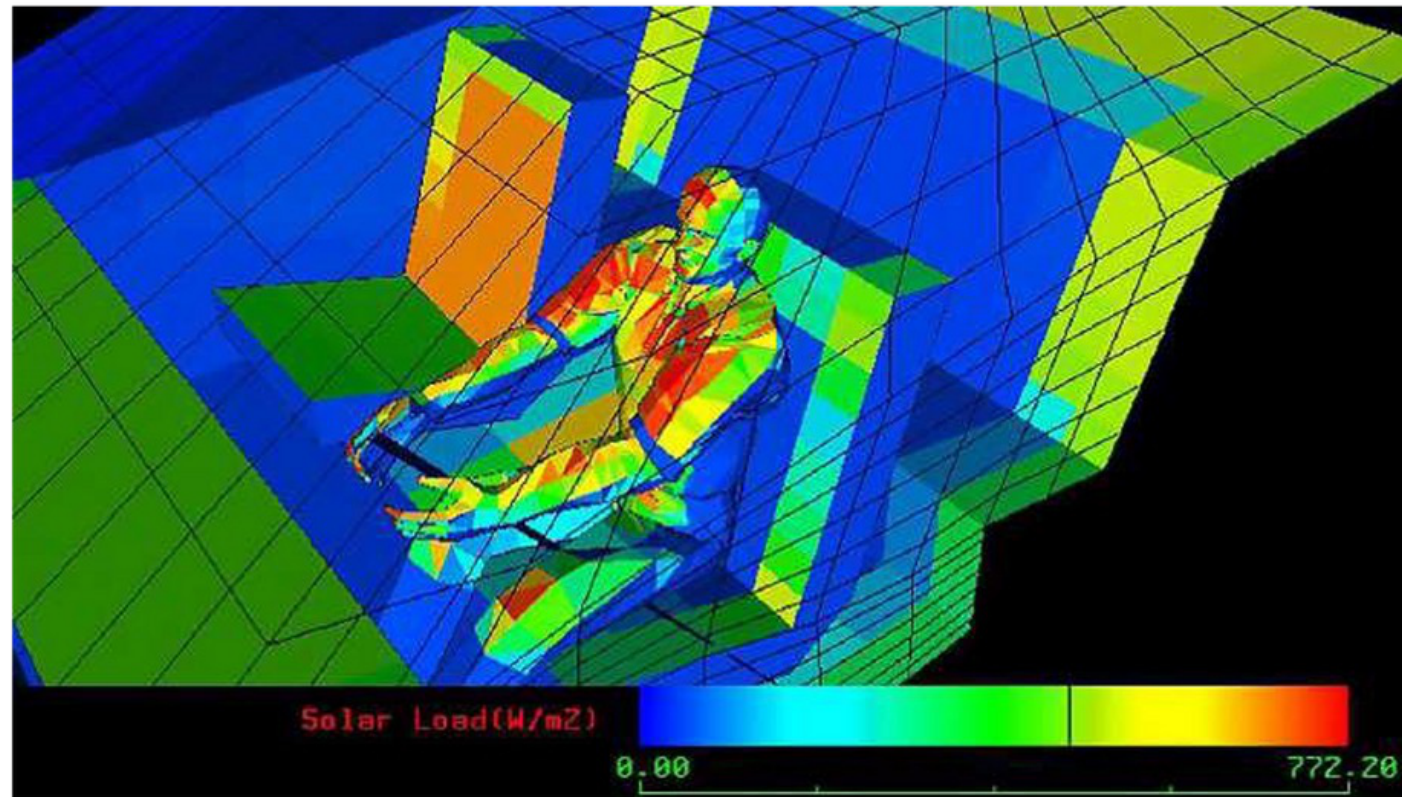

Thermal Comfort Automotive Research (TCAR program)

CBE's world-class thermal comfort resources have been used to design and test automobile heating and cooling systems that are optimized for energy efficiency and comfort. Physical testing is done in CBE's Controlled Environment Chamber with human and the thermal manikin shown at right. Modeling is done using CBE's Advanced Thermal Comfort Model.




Advanced Skin-Temperature-Controlled Thermal Manikin

CBE's heated thermal manikin allows the direct measurement of heat exchange between a human body and the surrounding thermal environment. It measures heat losses or gains, and skin temperature on 16 individual body parts. It may be used to investigate thermal comfort and thermal sensation in non-uniform environments, which often occur in buildings and transport. It can also be used to study both transient and stable environments in buildings and automotive cabins, and to evaluate insulating value of clothing.

Center for the Built Environment

UC Berkeley

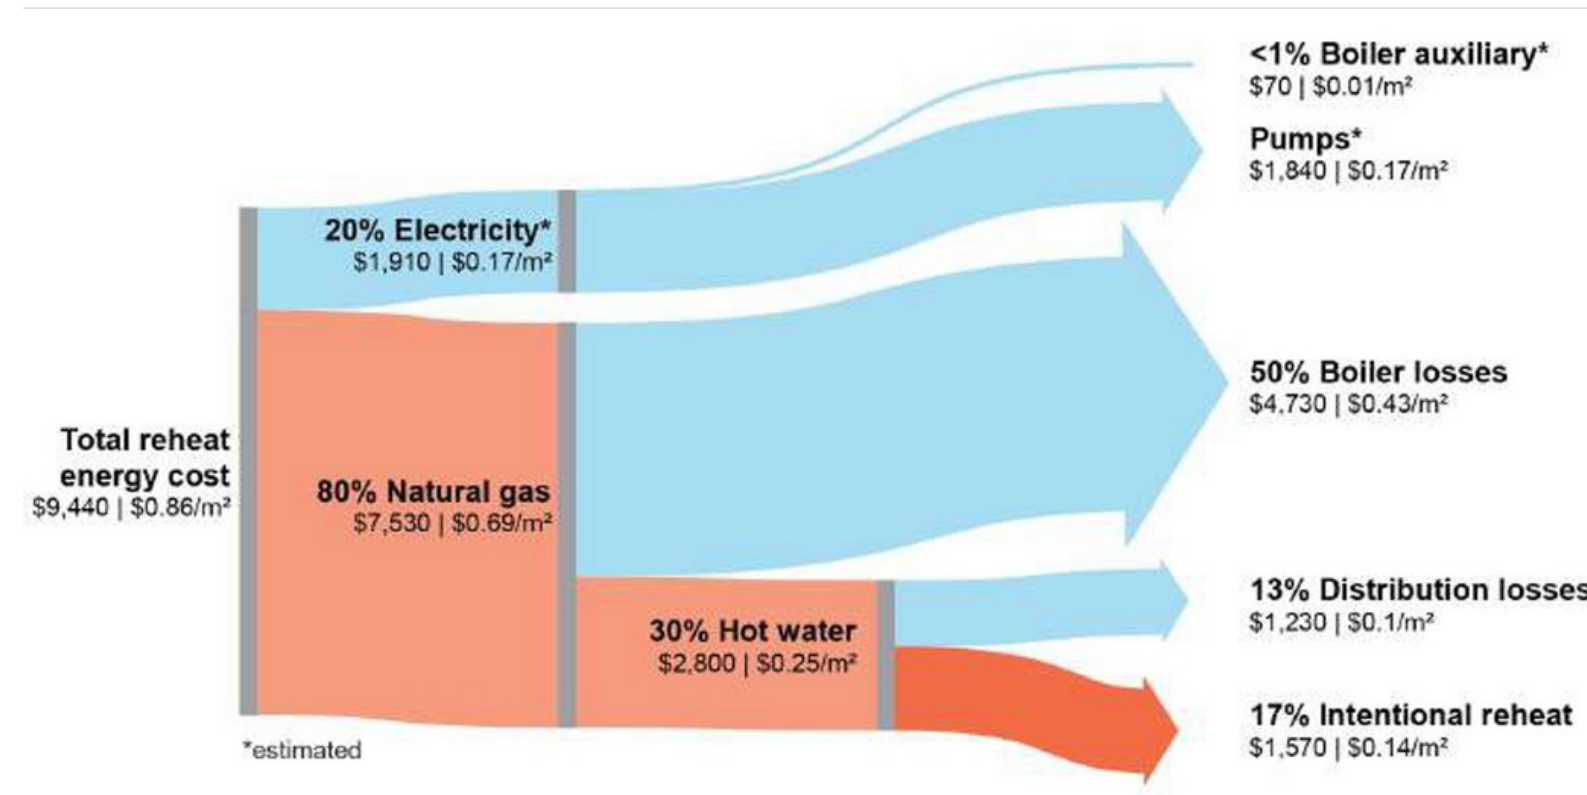

Technology Performance Assessment in Real Buildings

CBE has conducted several field investigations of heating, ventilation, and air-conditioning (HVAC) system and component performance. Researchers have developed novel methods for evaluating new technology energy use through analysis of large measured datasets from building automation systems.



Boundary Layer Wind Tunnel

Boundary layer wind tunnels simulate characteristics of natural wind impacts on a building or community. Researchers use flow visualization, velocity, and turbulence intensity measurements to understand the air flow. The tunnel can be used for studies of wind effects around and within buildings, and to study innovative air measurement technologies.

Center for the Built Environment

UC Berkeley

Technology Type	Technology Capabilities
Building Technologies	<ul style="list-style-type: none">• Full-scale test chamber allows human subject experiments to assess thermal comfort performance and occupant satisfaction with indoor environmental quality.• Occupant response to HVAC system type, temperature, airflow, humidity, personal control.• Precision measurements of thermal conditions (temperature, humidity, air velocity, mean radiant/operative temperature), as well as indoor air quality.• Innovative HVAC systems studied include personal comfort systems, underfloor air distribution, displacement ventilation, and smart ceiling fans.
Building Technologies	<ul style="list-style-type: none">• Wireless instrumentation toolkit allows field investigations of indoor environmental quality (IEQ) and HVAC performance in real buildings.• Measurement procedures based in ASHRAE's Performance Measurement Protocol (PMP).• Continues real-time data collection and reporting.• Data collected from building automation system can be used to supplement evaluation of energy and IEQ performance.• Occupant surveys used to assess occupant satisfaction.
Building Technologies	<ul style="list-style-type: none">• Boundary layer wind tunnel allows studies of wind effects around and within buildings.• Boundary layer wind tunnel can be used for validation and comparison testing of advanced anemometer sensors.
Energy Efficiency	<ul style="list-style-type: none">• Large measured datasets from Building Automation Systems are used to evaluate energy performance of innovative building HVAC systems.• Novel methods allow reliable comparison between different control strategies by using, for example, a randomized cross-over trial over extended time periods.• These data analysis methods have been applied in Sutardja Dai Hall (see CITRIS entry).
Energy Efficiency	<ul style="list-style-type: none">• Full-scale mock-ups of automobile cabins in CBE's Controlled Environment Chamber allow human subject testing of heating and cooling systems.• Heated thermal manikin evaluates heat losses or gains of energy efficient systems in buildings and automobiles on 16 individual body parts, and also measures insulation of fabrics• Advanced Thermal Comfort Model allows comparison of different designs and pre-selection for testing of most effective solutions.• Systems are evaluated to optimize thermal comfort with energy efficiency.

Center for Information Technology Research in the Interest of Society

UC Berkeley

Address

CITRIS Sutardja Dai Hall
University of California Berkeley, CA 94720-1839

Ombudsperson

David Lehrer
Communications and Research Collaborations

P: 510.642.4950

E: lehrer@berkeley.edu

W: www.cbe.berkeley.edu



Sutardja Dai Hall has over 6000 sensing points from the Siemens Apogee Building Automation System and Wattstopper lighting system accessible through the simple Monitoring and Actuation Profile (developed at UC Berkeley).



With additional sensors, such as temperature and flow sensors on the chilled water supply, discharge air temperature sensors at most of the 135 zones.



The Center also provides wireless indoor environmental quality sensors.



Center for Information Technology Research in the Interest of Society

UC Berkeley




Sutardja Dai Hall: Living Laboratory

Sutardja Dai Hall (SDH) on the UC Berkeley campus is a 141,000-ft² building that houses office space, laboratories, and classrooms. SDH was deliberately designed and built as a living laboratory with multiple meters and submeters. SDH has a Siemens Apogee Building Automation System (BAS) that controls a "best practice" variable-air-volume (VAV) reheat system for space conditioning of the 135 zones. Both the BAS and WattStopper lighting system are accessible through BACnet. BACnet points have been mapped and used for sophisticated control sequence testing.

Center for Information Technology Research in the Interest of Society

UC Berkeley

Technology Type	Technology Capabilities
Energy Efficiency	<ul style="list-style-type: none">• Sutardja Dai Hall is a living lab with large numbers of installed sensors, innovative building systems, and supportive building manager for research studies.• Large measured datasets from the Building Automation System have been used to evaluate and compare energy and cost performance of new building HVAC systems and control strategies.• Completed studies include time-averaged ventilation, cost-responsive supply air temperature reset, occupant voting-based temperature control with Comfytm, personal comfort systems, and demand response events.

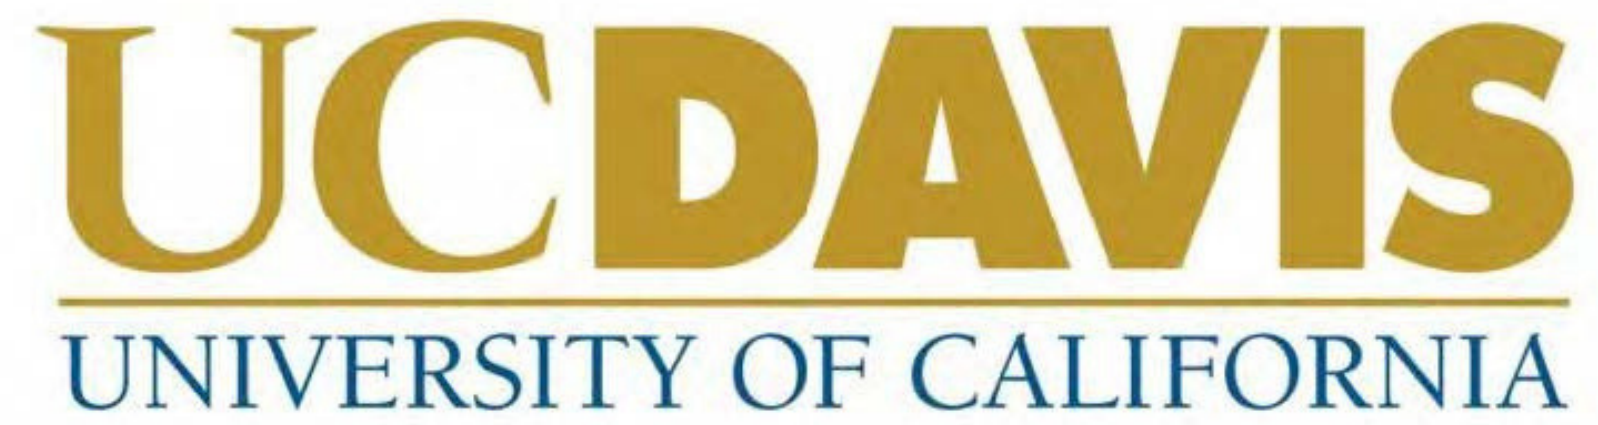

Western Cooling Efficiency Center

UC Davis

Address

215 Sage St.
Davis, CA 95616

Ombudsperson

Alan Meier
Acting Executive Director
Energy, and Efficiency
Institute

P: 510.316.0730

E: akmeier@ucdavis.edu

W: <https://wcec.ucdavis.edu>



The WCEC accelerates development and commercialization of efficient heating, cooling, and energy distribution solutions through innovation, RD&D, stakeholder engagement, education, and outreach.



Conducts applied research, development, and demonstrations in the field and the laboratory, spanning a wide spectrum of HVAC technologies and approaches, building envelope sealing research, as well as supporting controls and behavioral research.



Western Cooling Efficiency Center


UC Davis



Readily available hot and chilled water, outdoor air supplies, natural gas, and electricity.



Ability to design and construct laboratory testing apparatuses to meet the needs of a particular experiment or to test a particular product.

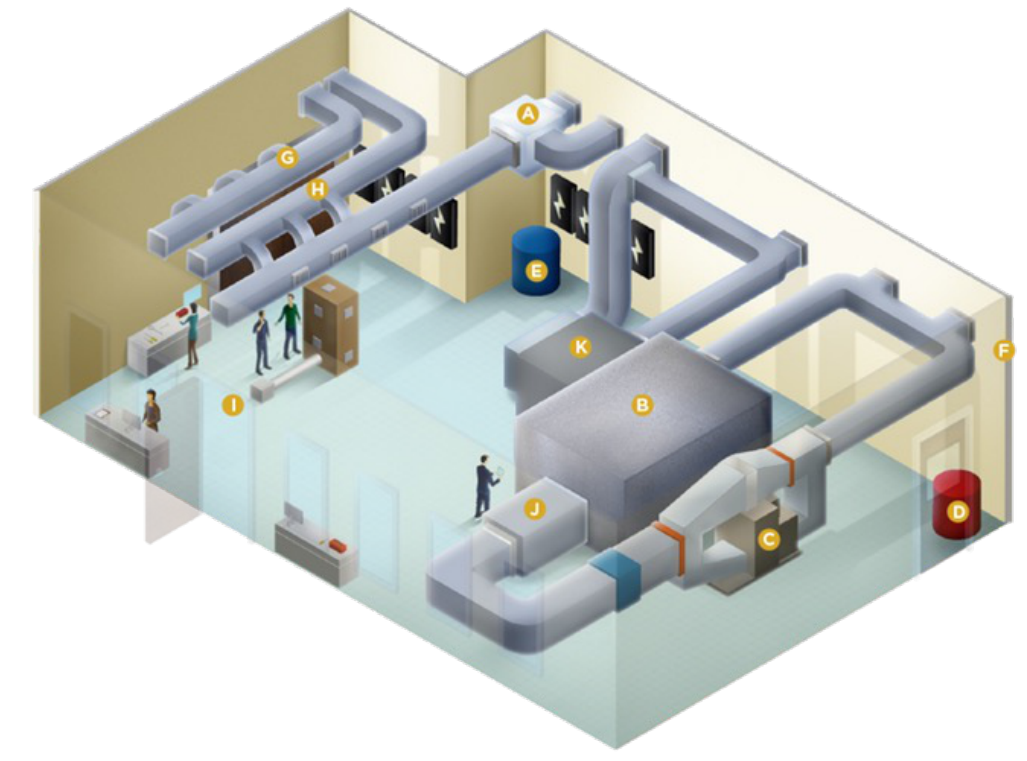

In-house laboratory with environmental chamber capable of re-creating 95% of California's hot/dry climates. The environmental chamber is capable of handling HVAC units up to 8-tons. Types of equipment that WCEC has tested in the environmental chamber includes:

- Evaporative condenser air pre-coolers
- Variable speed fan and compressor controls
- Sub wet-bulb evaporative chillers
- Cooling towers
- Heat pumps, including a gas-engine heat pump
- Microchannel evaporators

Western Cooling Efficiency Center

UC Davis

Technology Type	Technology Capabilities
Energy Efficiency	<ul style="list-style-type: none">• An environmental chamber designed specifically for appliance testing at controlled indoor conditions.
Energy Efficiency	<ul style="list-style-type: none">• Two environmental chambers simulating indoor and outdoor climate conditions with high accuracy control of dry bulb and wet bulb temperatures. Types of equipment that WCEC has tested in the environment chamber includes:<ul style="list-style-type: none">◦Evaporative condenser air pre-coolers◦Variable speed fan and compressor controls◦Sub wet-bulb evaporative chillers◦Cooling towers◦Heat pumps, including a gas-engine heat pump◦Microchannel evaporators• The environmental chamber is capable of handling HVAC units up to 8-tons.
Energy Efficiency	<ul style="list-style-type: none">• High accuracy (+/- 1%) airflow measurement capabilities.

California Lighting Technology Center

UC Davis

Address

633 Pena Dr.
Davis, CA 95618

Ombudsperson

Alan Meier
Acting Executive Director,
Energy and Efficiency Institute

P: 510.316.0730

E: akmeier@ucdavis.edu


W: <https://cltc.ucdavis.edu>



The CLTC is dedicated to accelerating the development and commercialization of next-generation, energy-efficient technologies in fields such as Lighting, Networking, Building Automation and EV.




Includes full-scale laboratories for research and development, prototyping, and product testing.

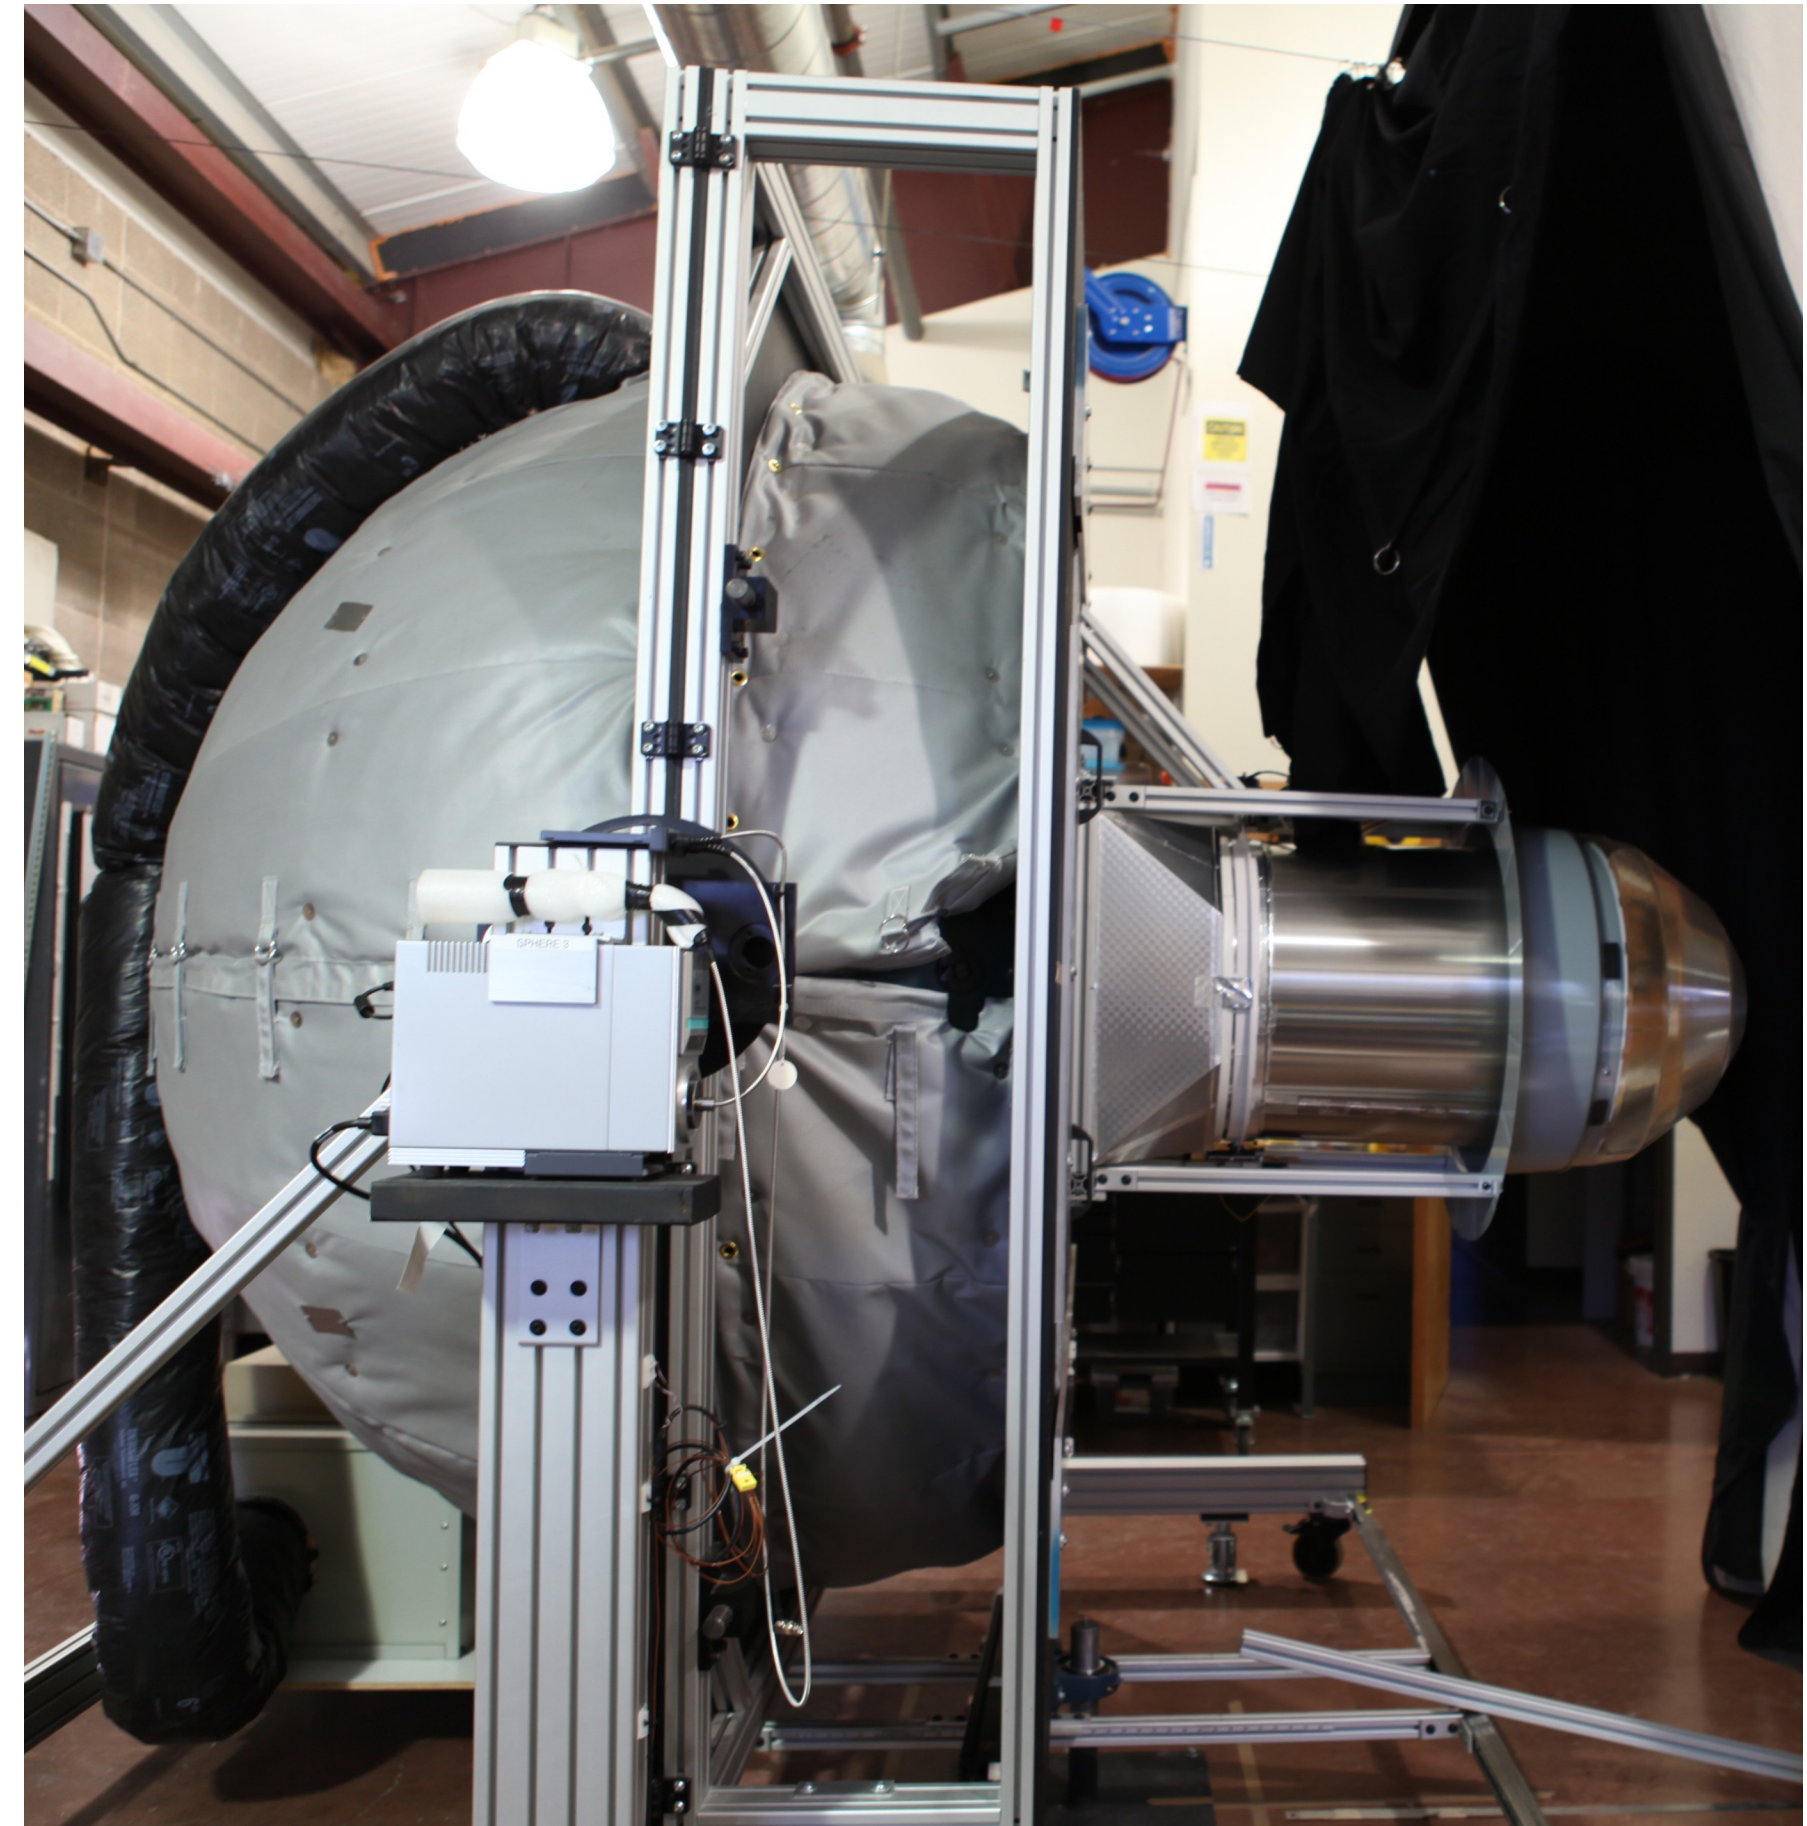

California Lighting Technology Center

UC Davis

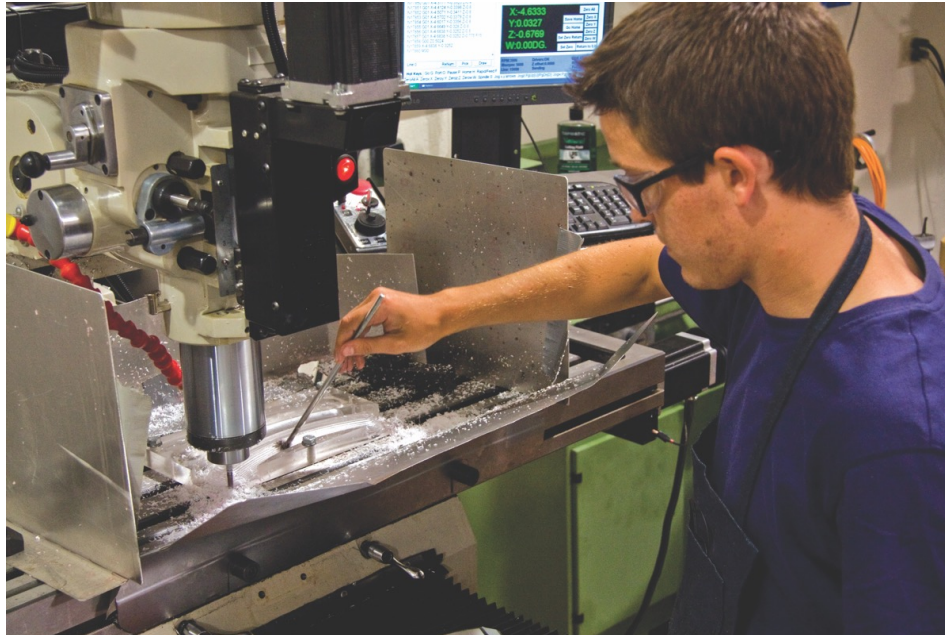

14,000+ sq. ft. facility

Functions as a living laboratory where new lighting, networking and controls technologies are researched, developed, and evaluated (both qualitatively and quantitatively).



Custom Performance Characterization

For many new technologies, standardized testing procedures do not exist. CLTC has the expertise to design and deploy custom product performance characterizations in a controlled laboratory setting or field demonstration.



Markets

CLTC works collaboratively with industry partners, regulatory agencies, utilities, contractors, workforce development teams, and others to ensure products and strategies are valuable to and appropriate for California markets.

California Lighting Technology Center

UC Davis

Technology Type	Technology Capabilities
Energy Efficiency	<p>General:</p> <ul style="list-style-type: none">• Includes Full-scale laboratories capable of prototyping development (including machining and circuitry), and product testing.• Equipped with devices and software capable of monitoring electrical and atmospheric condition of building or device level loads in local or remote configurations with high accuracy in line with industry standards. <p>Lighting:</p> <ul style="list-style-type: none">• Ability to measure photometric and electrical performance of luminaires. Facility contains 0.5, 1, and 2 meter integrating spheres capable of accurately measure most typical commercial and residential lighting form factors. In addition, to highly customizable options allowing for performance assessments of skylights and devices with unique form factors.• Ability to measure candle-power distribution (CPD) of luminaires utilizing in house goniophotometers sized for large and small form factors.• Capable of assessing occupancy sensors and daylight sensors electrical characteristics, sensitivity, and responses to various encroaching objects and illuminance conditions.• Full-Scale mock-up of medical patient room assessing feasibility of advanced lighting controls focused on manipulating indirect amber light sources and medical reception mock-up assessing feasibility of advanced integrated lighting controls.
Building Technology Internet of Things	<p>Building Automation:</p> <ul style="list-style-type: none">• Ability to assess electrical and network performance characteristics of Network Lighting Control Systems (NLCS) and Building Automation Systems (BAS).• Full-Scale mock-up of residential living space designed to support the assessment of advanced residential appliances integrated with Home Energy Management Systems (HEMS) for energy efficiency, IOT performance and non-energy benefits.• Integrated Controls Environment utilized to test the energy efficiency performance of both commercialized and prototype devices controlling lighting, HVAC, and Fenestration.• Advanced Networking Laboratory capable of evaluating the cyber security and energy efficiency of networking equipment and networked building controls. <p>Plug Loads:</p> <ul style="list-style-type: none">• Programmable load capable of simulating any load typically found in residential and commercial buildings. Used to assess load controller capabilities and metering accuracy.
Transportation	<p>EVSE:</p> <ul style="list-style-type: none">• Ability to assess and test level 1, level 2, and DC EVSE in accordance with industry standards including Energy Star.• Capable of evaluating emerging EVSE that integrate BESS or PV for total system benefits• Capable of performing man-in-the-middle testing and analysis on power and data transmission signals between EVSEs and EVs in uni-directional or bi-directional operation.

Green Technology Laboratory

UC Davis

Address

1235 Bainer Hall
University of California Davis, CA 94720-1839

Ombudsperson

Alan Meier
Acting Executive Director,
Energy and Efficiency Institute

P: 510.316.0730

E: akmeier@ucdavis.edu

W: <https://mae.engr.ucdavis.edu/jwpark/DavisSite/pages/energy-storage.html>



GTL studies the behavior of lithium-ion batteries of varying chemistries under different conditions. Using this data, we create models, new test procedures, controls, and design systems that take advantage of high energy density storage.



Combines mechanical design and analysis, electrical design, thermodynamics, heat transfer, energy systems, and machine shop skills to build "real-world" systems.




Expertise in using second-life batteries retired from electric vehicles for building energy storage.



Green Technology Laboratory


UC Davis

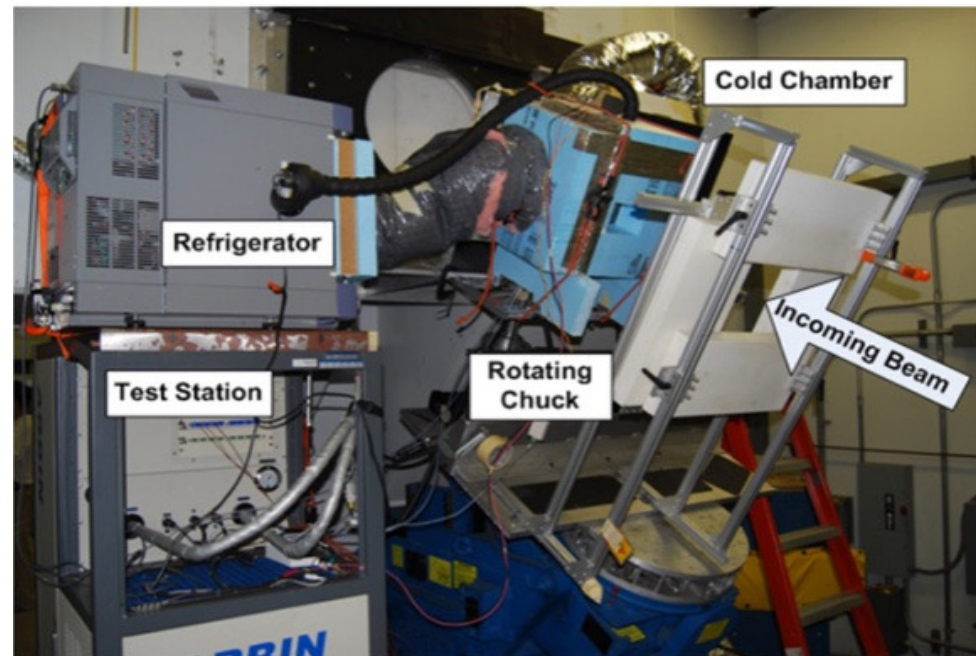

- Access to UC Davis McClellan Nuclear Research Center (MNRC) for in-situ neutron radiography (NR) of fuel cells and batteries
- Equipped with fully automated fuel cells and battery test stations and various tools to perform in-situ NR imaging
- The lab has access to a machining center with high precision machining tools, including a CNC, welding machine, and EDM cutting system



- Green Technology Laboratory is equipped with various fuel cell, battery and energy storage test equipment along with cell design and fabrication capabilities
- Primary test units are Bitrode battery/pack testers, multi-channel Arbin battery testers, high voltage bi-directional inverters, and environment chambers. Test profiles (current and power) are PC-controlled and data can be sampled at rates from 10-100 Hz. The lab is able to supply and regulate bottle hydrogen and high pressure air for fuel cell testing. Hydrogen detectors are installed in the lab.

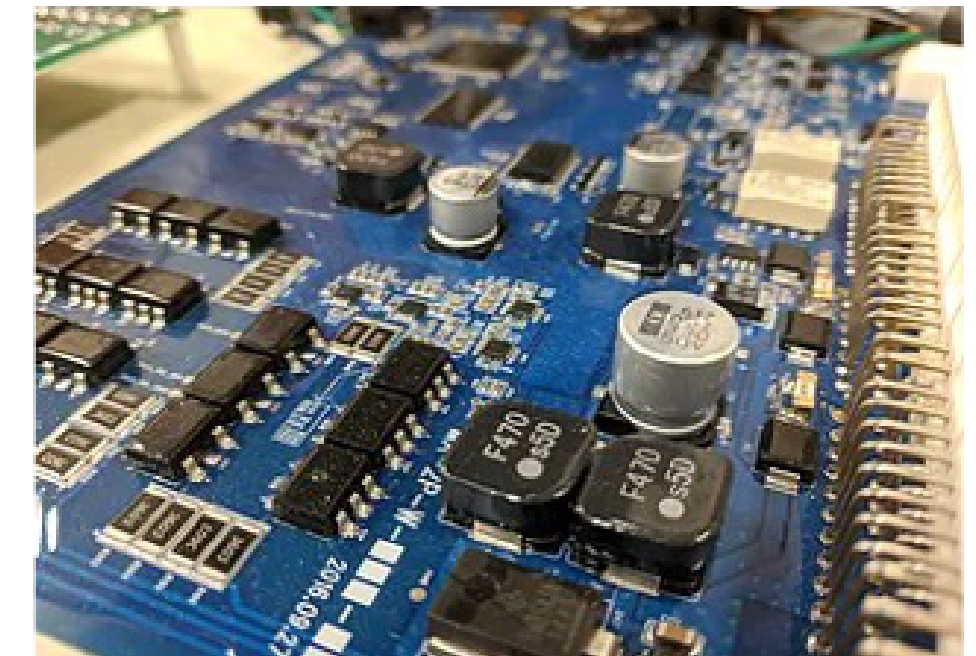

- Testing, evaluating and integrating high power, state-of-the-art energy storage including the latest battery and capacitor technology into hybrid systems for use by researchers and students.
- State of the art battery management system (BMS) to maintain the safety and efficiency of battery pack.
- Access to Robert Mondavi Institute (RMI) Microgrid with 220kW solar PV and 300kWh energy storage system using second life EV batteries.

Green Technology Laboratory

UC Davis

Technology Type	Technology Capabilities
Energy Storage	<ul style="list-style-type: none">• Multichannel battery test station and various tools to test and assemble battery packs. The lab has access to a machining center with high precision machining tools, including a CNC, welding machine, and EDM cutting system. The associated fuel cell laboratory is equipped with an automated fuel cell/battery test station and environment chamber, along with cell design and fabrication capabilities.• Ability to test batteries, fuel cells, and ultra-capacitors. Them primary test units in the lab are two Bitrode battery tester (50/100V, 400A), four multi-channel Arbin battery testers (10V-204V, 20A-200A), four bi-directional inverters (5-60 kW/110-600V; SMA, Ideal Power, Rhombus, Princeton Power), and three environment chambers with temperature and humidity control. Test profiles (current and power) are PC-controlled and data can be sampled at rates from 10-100 Hz. The lab is able to supply and regulate bottled hydrogen and high pressure air for fuel cell testing. Hydrogen detectors are installed in the lab. Numerous fuel cell, battery, and ultra-capacitor test projects have been conducted using custom LabView software.• Testing, evaluating and integrating high power, state-of-the-art battery management system (BMS) and energy storage including the latest battery and capacitor technology into hybrid systems for use by researchers and students is also conducted in the lab.

EEl Smart Home

UC Davis

Address

110B Sage St
Davis, CA 95616

Ombudsperson

Alan Meier
Acting Executive Director,
Energy and Efficiency Institute

P: 510.316.0730

E: akmeier@ucdavis.edu

W: <https://smarthome.honda.com/>

TEST YOUR TECHNOLOGY IN A REAL WORLD HOME.

Research platform designed to be easily reconfigured to test your new energy efficient technologies including HVAC, EVs, energy storage, lighting, controls, and other appliances.

GENERAL SPECIFICATIONS

Construction: slab foundation, wood framing

Floor Area: 1,944 sq. ft.

Annex Floor Area: 190 sq. ft.

Bedrooms: 3


Bathrooms: 2.5

Walls: 9.25" double-stud walls with cellulose insulation

Windows: Triple-pane

PV: 9.5kW

Garage: 2-car, HEMS Ready

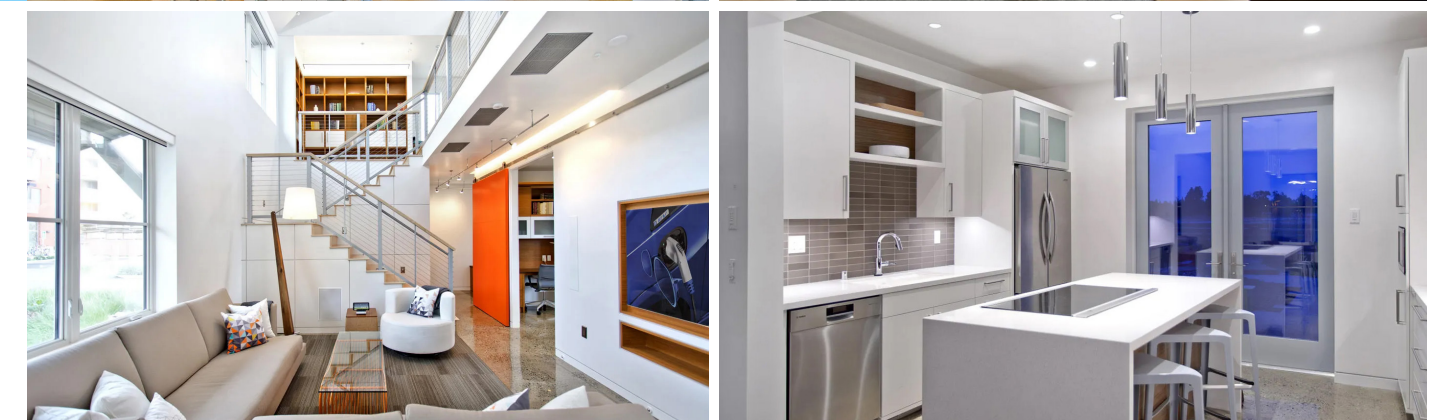

Let's Collaborate
akmeier@ucdavis.edu

uci

Advanced Power and Energy Program (APEP)

UC Irvine

Address

Engineering Laboratory Facility, Building 323
University of California Irvine, CA 92697-3550


Ombudsperson

Jeff Wojciechowski
Associate Director & Manager
Advanced Power and Energy Program

P: 949.824.7302 x11115

E: jsw@apep.uci.edu

W: www.apep.uci.edu



APEP focuses on the development of efficient, environmentally sensitive, sustainable power generation and energy conversion worldwide.




Rich tradition in energy and environmental studies and is located in the heart of a region that is internationally recognized for leadership in energy and transportation research and innovation.



Multiple on-site research capabilities that include:

- Testing and demonstrating of distributed energy technologies from a few to 500 kilowatts with combined cooling, heating, and power
- Energy Systems Integration and Impacts, Renewable Fuels, Energy Storage, Vehicle Evolution Laboratory, Grid Evolution Laboratory

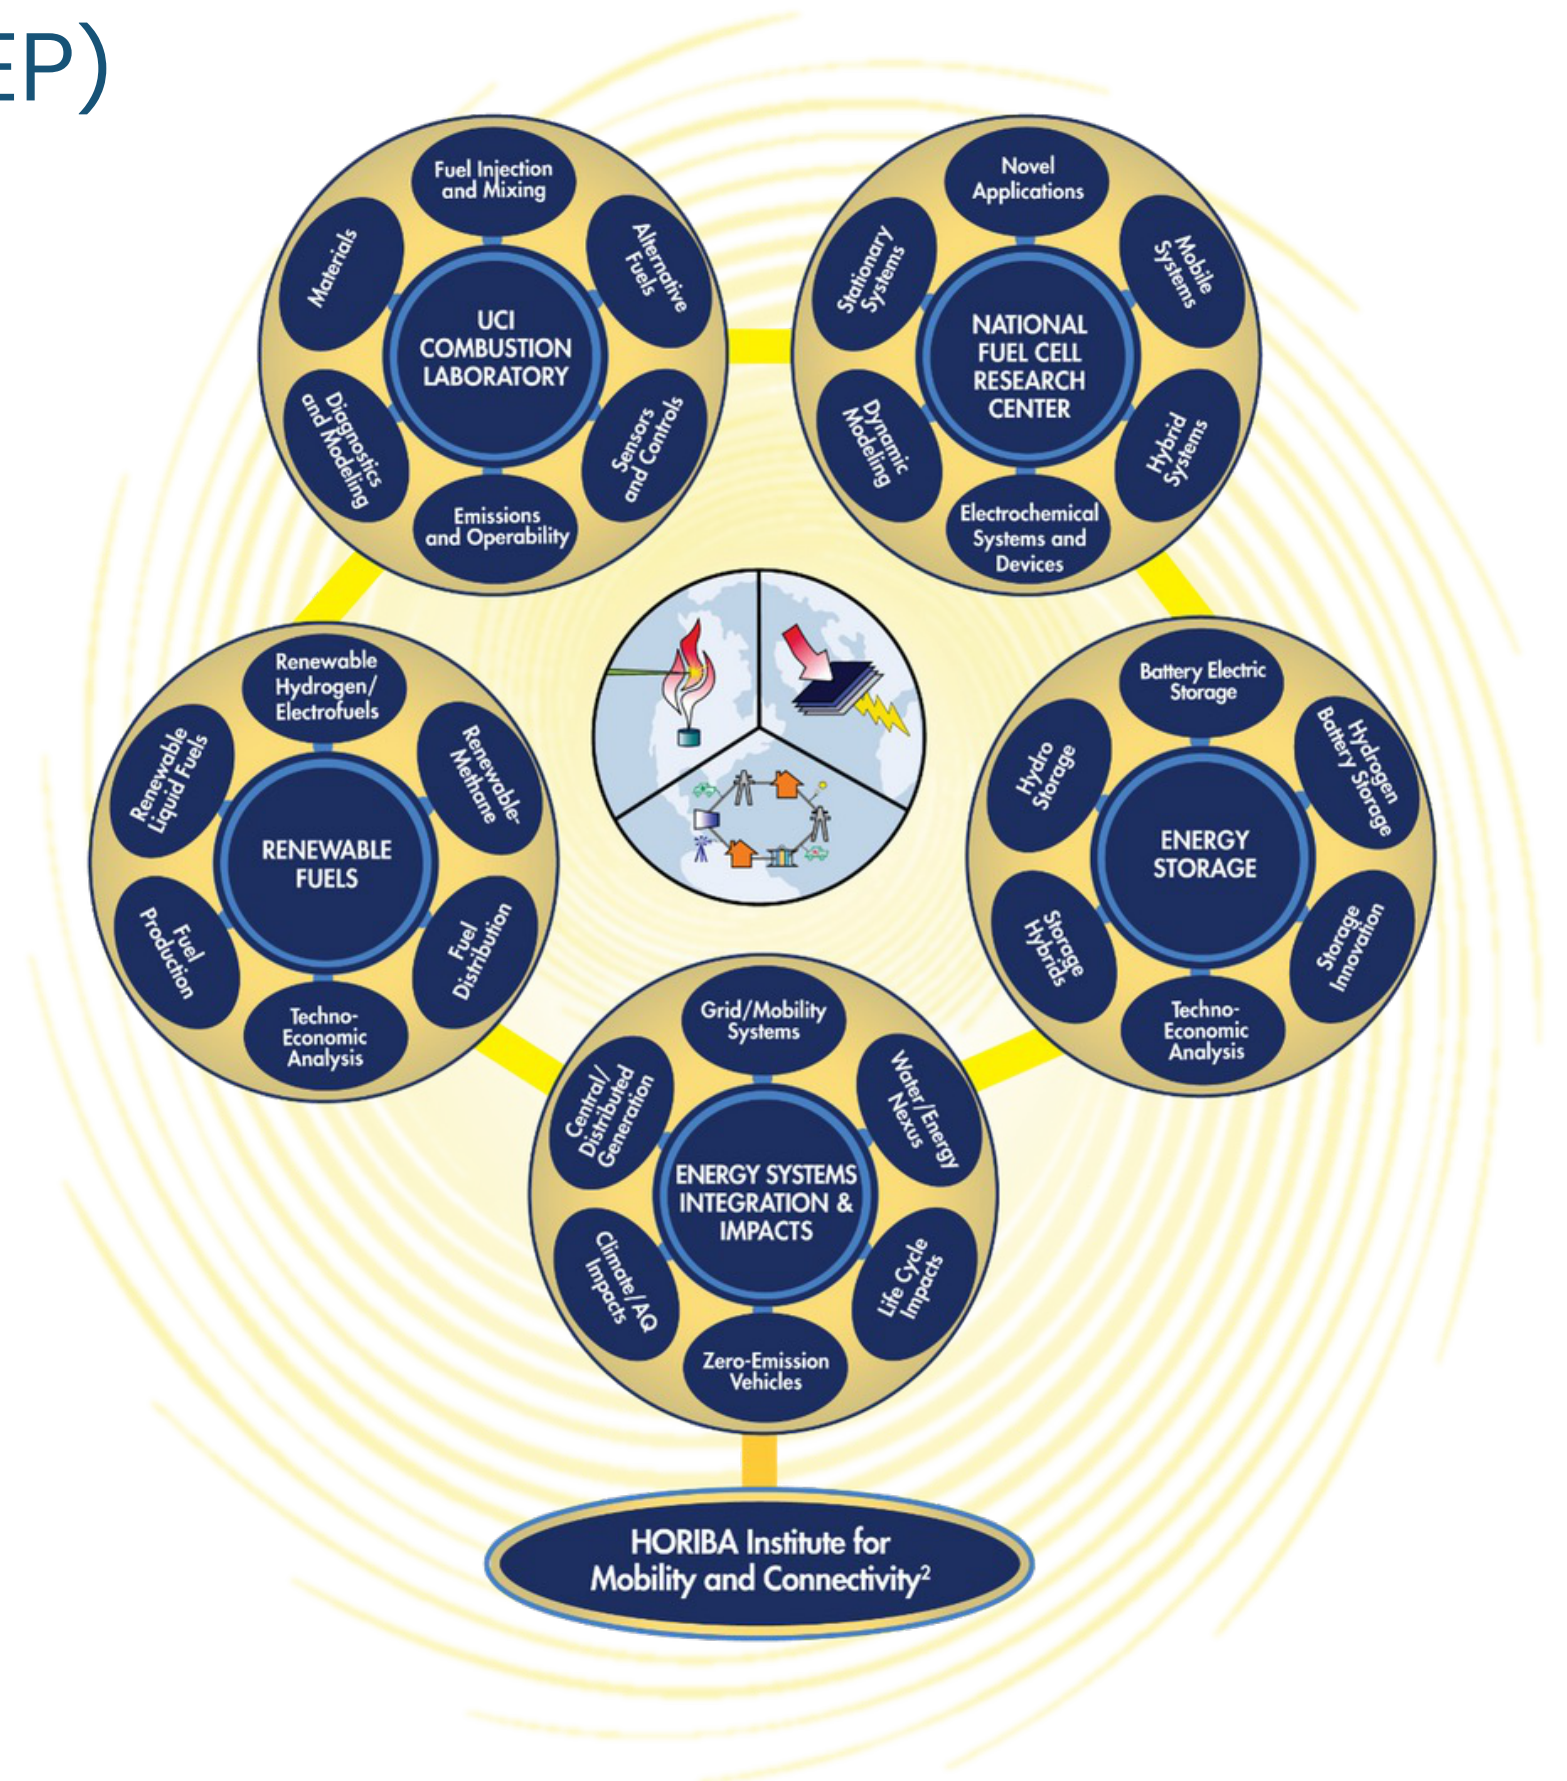

Advanced Power and Energy Program (APEP)

UC Irvine



Grid Evolution Testing Program

Capabilities that allow testing of distributed energy resources and controls at levels ranging from grid and microgrid simulation to practical application. These include the capability to evaluate DER and the system integration of DER including nanogrid and microgrid control, islanding, fault detection and remediation, and overall reliability and resiliency.



Sustainable Transportation Platform

Capabilities that allow testing at the interface transportation and the grid including models, components, and systems for the future of zero-emission electrochemical battery and fuel cell electric vehicles. Facilities include the UCI hydrogen station, the oldest publicly assessable in the State and most in demand in the world which is currently increasing capacity and fueling positions four-fold, the UCI Anteater Express transit fleet comprised of 21 zero-emission buses, 20 battery electric and one hydrogen electric, and a both research dedicated and research-enabled level 2 light duty vehicle chargers.



Advanced Power and Energy Program (APEP)

UC Irvine

Technology Type	Technology Capabilities
Renewable Generation	<ul style="list-style-type: none">• Simulation• Controlled Physical Laboratory
Energy Efficiency	<ul style="list-style-type: none">• Simulation• Controlled Physical Laboratory
Energy Storage	<ul style="list-style-type: none">• Simulation• Controlled Physical Laboratory
Building Technologies	<ul style="list-style-type: none">• Simulation• Controlled Physical Laboratory

National Fuel Cell Research Center (NFCRC)

UC Irvine

Address

Engineering Laboratory Facility, Building 323
University of California Irvine, CA 92697-3550

Ombudsperson

Jeff Wojciechowski
Associate Director & Manager
Advanced Power and Energy Program

P: 949.824.7302 x11115

E: jsw@apep.uci.edu

W: www.apep.uci.edu



Accelerates the development and deployment of fuel cell technology.
Forms strategic alliances to facilitate markets evolution.




Multiple on-site research capabilities that include:

- Testing of fuel cell components and systems
- Testing of electrolyzer and power-to-gas applications




Opportunities to connect with major institutions around the world.

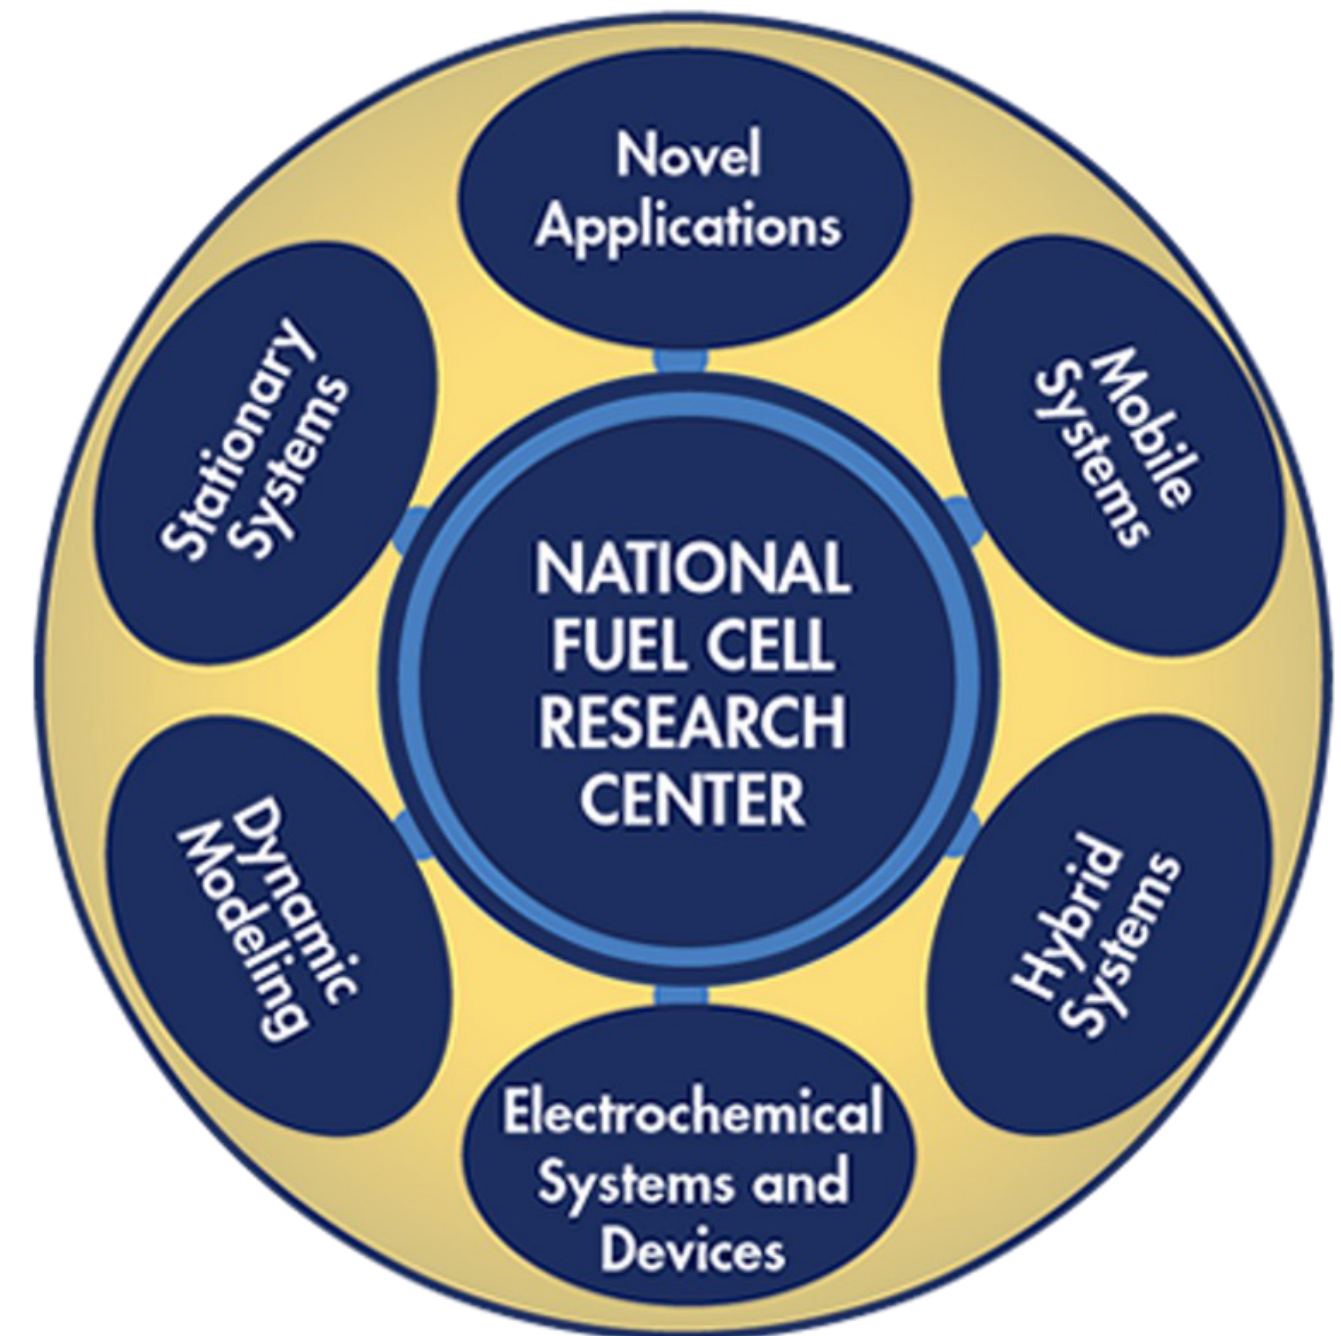


National Fuel Cell Research Center (NFCRC)

UC Irvine

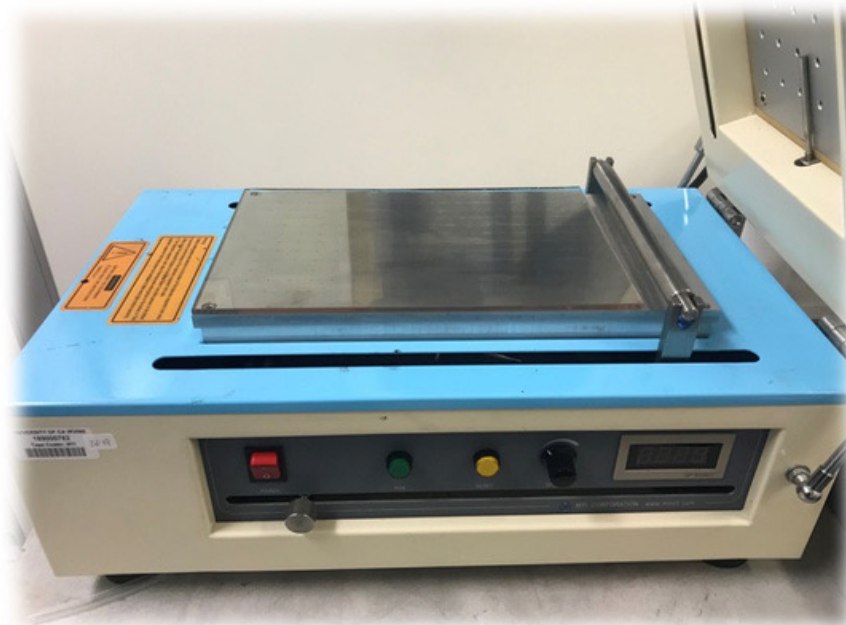

Ink Processing Platform

Ink processing for fuel cells and electrolyzer electrodes. Material prescreening using rotating disc electrodes. Fabrication of membrane electrode assemblies for fuel cells, electrolyzers, and hydrogen pumps. Suite of materials, catalysts, membranes, gas diffusion layers available for pairing with various materials components.

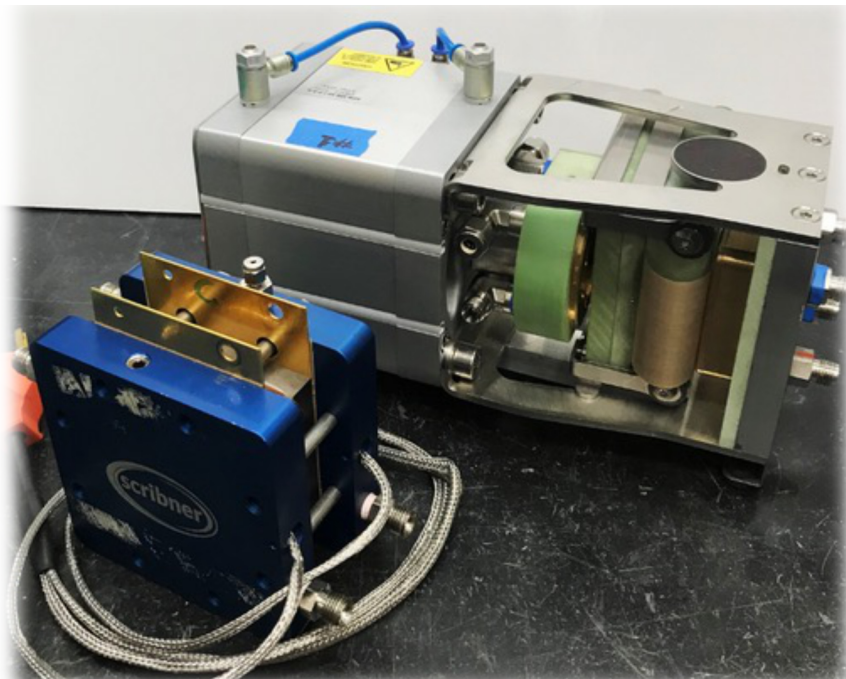

Electrochemical Systems Testing Platform

Test stands for automated testing of fuel cells and electrolyzers for a single cell testing with advanced diagnostics for probing transport and reaction kinetics. Various potentiostats for electrochemical impedance spectroscopy diagnostics. Integrated suite of sensors and probes for advanced diagnostics.

National Fuel Cell Research Center (NFCRC)

UC Irvine



Stationary Fuel Cell and Electrolyzer Test Platforms

Capability of testing fuel cell and electrolyzer components and fuel cell and electrolyzer systems in facilities equipped with electric load banks, thermal energy load banks, grid connectivity, and requisite instrumentation to characterize performance.



Large Electromechanical Systems Test Platform

Capability to conduct testing of systems up to 450kW, examples of which have included the first proof-of concept demonstration of fuel cell/gas turbine (FC/GT) hybrid technology shown here, the integration of a conventional heat engine with an emerging advanced fuel cell technology that synergistically results in an unusually high fuel-to-electricity conversion efficiency.

National Fuel Cell Research Center (NFCRC)

UC Irvine

Technology Type	Technology Capabilities
Renewable Generation	<ul style="list-style-type: none">• Fabrication of membrane electrode assemblies for fuel cell and electrolyzers:<ul style="list-style-type: none">◦Screen Printer and tape casting, hot press• Testing fuel cell and electrolyzer materials, hydrogen pumps (including both PEM and AEM) at low and high temperatures:<ul style="list-style-type: none">◦Prescreening of catalysts using rotating disc electrodes;◦Membrane electrode assemblies evaluation with test stands (polarization, transport, EIS, durability testing)◦Test stands include T, RH, pressure control, CO-probes◦Gas product evaluation with GC◦IR imaging for temperature monitoring• Multi-physics modeling capability
Material-Based	<ul style="list-style-type: none">• Electrochemical technologies materials characterization:<ul style="list-style-type: none">◦Porous layers electric and thermal conductivities;◦Electrodes composition (XRF, Raman)◦Physical characterization of samples using various imaging and spectroscopic techniques◦Ink studies with tensiometry, rheology, zeta potential, particle size distribution

UCI Combustion Laboratory (UCICL)

UC Irvine

Address

Engineering Laboratory Facility, Building 323
University of California Irvine, CA 92697-3550

Ombudsperson

Jeff Wojciechowski
Associate Director & Manager
Advanced Power and Energy Program

P: 949.824.7302 x11115

E: jsw@apep.uci.edu

W: www.apep.uci.edu



Reduction of pollutant formation in continuous combustion systems with a focus on fuel/air mixing with both gaseous and liquid fuels.




Multiple on-site research capabilities that include:

- Providing of advanced diagnostic capabilities to study combustion and flow field behavior
- Computational Fluid Dynamics
- Extensive testing capabilities from STP to 10 atmosphere, 1200°F feed air, and an array of test platforms and laser diagnostics including laser anemometry and phase Doppler interferometry.




UCI Combustion Laboratory (UCICL)

UC Irvine

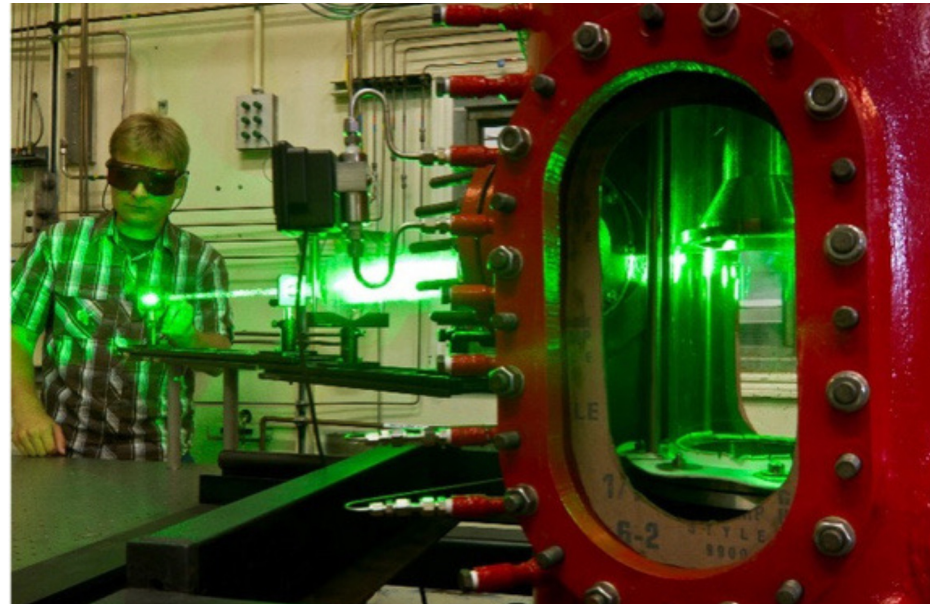

High-Pressure, High-Temperature Platform

Capabilities that allow research at levels ranging from basic science to practical application. These include the capability to operate practical combustion systems, including small gas turbine engines, boilers, and appliances on simulated fuels that are expected to play an increasing role in our future generation, industrial processes, and transport needs.

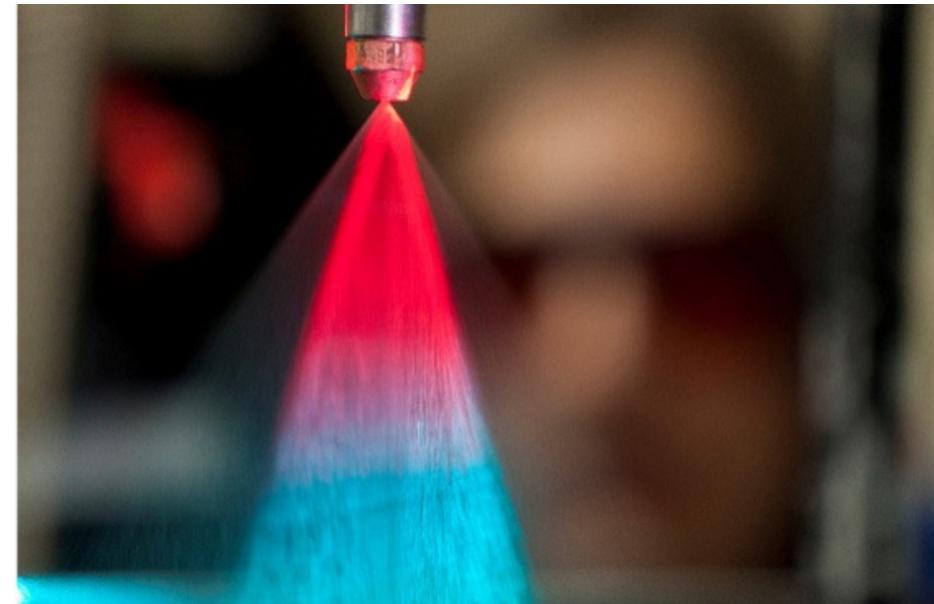

Array of Laser Diagnostics

The UCICL was founded in 1970 with the advent of laser diagnostics and, in 1988, relocated in a 23,000# purpose-built test facility for laser applications from STP to high-pressure, high-temperature conditions representative of gas turbine engines. The capabilities include high-resolution time-resolved laser imaging, laser anemometry, and phase Doppler interferometry that are applied to (1) liquid spray atomization, mixing, evaporation, and reaction, and (2) performance on renewable fuels.



Beta Test Facility

The Beta Test Facility allows, up to 100's of kilowatts, near-commercial, just-commercial, and practical combustion systems under development to be tested for thousands of hours on liquid and gaseous fuels of varying composition. Both grid-connected and off-grid performance, and testing with or without combined cooling, heat, and power can be accommodated.

UCI Combustion Laboratory (UCICL)

UC Irvine

Technology Type	Technology Capabilities
Renewable Generation	<ul style="list-style-type: none">• High-pressure, high-temperature platform<ul style="list-style-type: none">◦ Pressure to 10 atm◦ Temperature to 1200°F• Beta-test platform<ul style="list-style-type: none">◦ Plug and Play◦ Up to 300kW◦ Thermal heat recovery
Energy Efficiency	<ul style="list-style-type: none">• Beta-test platform<ul style="list-style-type: none">◦ Plug and Play◦ Up to 300kW◦ Thermal heat recovery

HORIBA Institute for Mobility and Connectivity (HIMaC)

UC Irvine

Address

Engineering Laboratory Facility, Building 323
University of California Irvine, CA 92697-3550

Ombudsperson

Jeff Wojciechowski
Associate Director & Manager
Advanced Power and Energy Program

P: 949.824.7302 x1115

E: jsw@aep.uci.edu

W: www.aep.uci.edu




Testing and materials analyses of electrochemical components and systems, battery and fuel cell electric vehicle drivetrains, grid and microgrid technologies, and sensors and controls for connected and autonomous vehicles.



Multiple on-site research capabilities that address the evolution of zero emission vehicles, the coupling to the electric and hydrogen grids, and the communication between vehicles and with the infrastructure.



Capabilities to test electric drive vehicles, including battery, fuel cell and hybrid vehicles with a state-of-the-art hub dynamometer. Standardized drive cycles give comparable results.

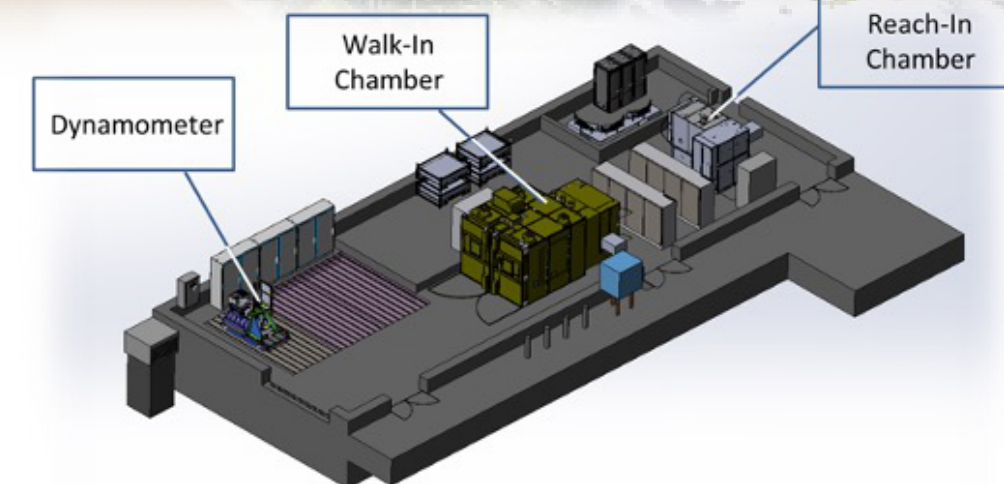

HORIBA Institute for Mobility and Connectivity (HIMaC)

UC Irvine



Battery and Fuel Cell Environmental Test Platforms

Capabilities that allow research at levels ranging from basic science to practical application,. These include the capability to operate practical electrochemical systems, including battery and fuel cell engines, battery and fuel cell cells and modules under varying temperature and humidity extremes. Chambers and cyclers are available from bench top to a 450kW walk-in controlled environment chamber. Cyclers are designed for a range of operating currents with EIS capability. Sample holders are available for operando electrochemical system performance and morphology evaluation with x-ray computed tomography.



Electrochemical Component Fabrication & Analysis

- Battery and energy storage fabrication equipment including coin cell and pouch cell (various sizes) assembly in Ar glove box. Electrochemical testing of anode and cathode materials. Fuel cell assembly (single cells)
- Analysis of battery/fuel cell electrodes and materials with various analytical instruments.
- Post-mortem analysis

Grid Evolution Platform

Three levels of testing from simulation to a controlled physical laboratory, to a field laboratory. The controlled physical laboratory is designed to test distributed energy resources such as batteries, fuel cells, photovoltaic panels, inverters, and electrolyzers, and both AC and DC loads including Hardware-In-the-Loop configurations. Electric grid, microgrid, and building nanogrids are represented with state-of-the-art real-time simulation processing.



Electric vehicle testing – dynamometer

HIMaC's dynamometer is designed to handle various vehicles with industry-standard equipment and capabilities (including temperature monitoring, CAN bus, voltage controls). Standardized road tests or individual test profiles possible. The dynamometer is capable of vehicles up to 500 kW and up to 8,000 Nm. Complimentary DC power supply available for all kinds EVs. H2 for fuel cell car available.



HORIBA Institute for Mobility and Connectivity (HIMaC)

UC Irvine

Technology Type	Technology Capabilities
Renewable Generation Energy Storage Transportation	<ul style="list-style-type: none">• Pack cyler w/ walk-in chamber<ul style="list-style-type: none">• pack cyler w/ 2 channels (250 kW, 1000 V each), can be combined for up to 500 kW• Climate control: -73° to +180°C; 10 % RH to 98 % RH• Cell and module testing in reach-in chamber<ul style="list-style-type: none">• module cyler: 50 kW, 150 V• cell cyler: 8 channels up to 100 A, 6 V, 600 W• Climate control: -73° to +180°C; 10 % RH to 98 % RH• Fuel cell and battery cell design and fabrication<ul style="list-style-type: none">• Coin crimpers• Pouch sealer• Fuel Cell test stations• Multichannel batter test stations<ul style="list-style-type: none">• For sizes from coin cells to battery packs (< 1 mA up to 200 A)• Potentiostats with EIS capability• Post-mortem assessment including<ul style="list-style-type: none">• Material characterization• Spectroscopic techniques• X-ray computed technology• Dynamometer<ul style="list-style-type: none">• 2-wheel dynamometer• up to 500 kW, up to 8,000 NM
Grid Technologies	<ul style="list-style-type: none">• Grid Evolution Platform<ul style="list-style-type: none">• Simulation• Controlled Physical Laboratory<ul style="list-style-type: none">• Plug and Play• Up to 300kW

California Plug Load Research Center (CalPlug)

UC Irvine

Address

4100 Calit2 Building
University of California Irvine, CA 92697-2800

Ombudsperson

Jeff Wojciechowski
Associate Director & Manager
Advanced Power and Energy Program

P: 949.824.6900

E: calplug@gmail.com; jsw@aep.uci.edu

W: www.calplug.org




Conducts research on plug loads to implement strategies and solutions in ENERGY EFFICIENCY.

Collaborates with other academic institutions, government agencies, utilities, and more to connect all stakeholders to address challenges in CLIMATE CHANGE.

Multiple on-site research capabilities that include:

- Testing of a variety of plug load and IOT devices
- Development and Testing of simulation applications
- Building Energy Management Systems research

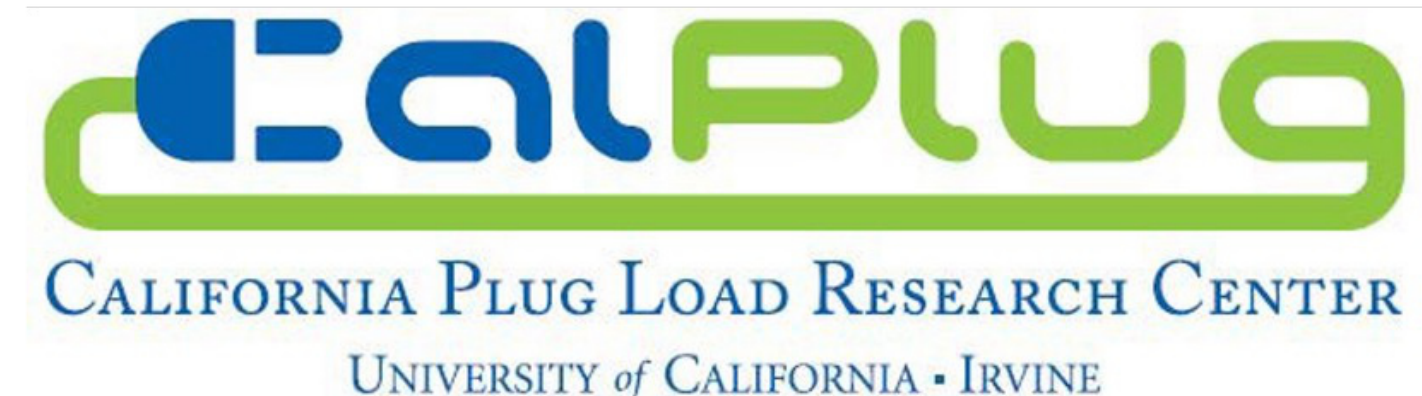

California Plug Load Research Center (CalPlug)

UC Irvine



Our interdisciplinary research is uniquely adept to studying plug loads, featuring an equal commitment to both the engineering components and the user behavior aspects of plug load devices required to address the inherently complex, multifaceted problems in this field.

This research facility at UCI specializes primarily in plug load energy research, with the aim of helping to reduce energy consumption and achieve state and national goals for decarbonization. Our integrative research approach combines engineering and computer science with quantitative and qualitative social science methods to holistically assess plug load usage in residential and commercial settings, as well as on-site lab tests.

CalPlug collaborates with a variety of public and private organizations, facilitating conversations between industry, academic research institutions, and the public sector. At semi-annual workshops, CalPlug invites speakers from a wide variety of disciplines, including engineering and computer science, public policy, and the social sciences to discuss their research on salient, timely topics related to energy conservation and management.

California Plug Load Research Center (CalPlug)

UC Irvine

Technology Type	Technology Capabilities
Energy Efficiency	<ul style="list-style-type: none">• Independent testing, evaluation, modeling• Survey, program development, industry literary review• Literature review and best practices guide development for major utilities• Evaluation of utility energy efficiency programs• TRC (Total Resource Cost) calculator for utilities• User surveys• Codes and standards/policy recommendations based on lab and field test results
Building Technologies	<ul style="list-style-type: none">• Field test, experiments, methodology development• Data analysis, management, actionable data driven decision making• Modeling using public datasets, e.g. for understanding GHG emissions
Internet of Things	<ul style="list-style-type: none">• Prototype development• Device use profile inventory• PLSim tool to calculate energy use and analysis• Software testing for energy management systems and settings on computers, TVs and other media devices• Independent in-house lab tests of devices under various conditions• Product benchmarking tests

Institute for Design and Manufacturing Innovation (IDMI)

UC Irvine

Address

444 Engineering Tower
University of California Irvine, CA 92697

Ombudsperson

Jeff Wojciechowski
Associate Director & Manager
Advanced Power and Energy Program

P: 949.824.4105

E: idmi@uci.edu; jsw@aep.uci.edu

W: www.manufacturing.uci.edu



Conducts research on scalable composites and micro/ nanomanufacturing of architected materials, and modeling, design, and control for manufacturing and advanced characterization of a wide portfolio of materials.




Collaborates to address challenges in processing and characterization of advanced, next generation architected materials.




Multiple on-site research and manufacturing capabilities:

- Synthesis and fabrication of f composites structures and coatings
- Scalable manufacture of architected materials
- Ultrastructural and mechanical characterization of multiscale materials

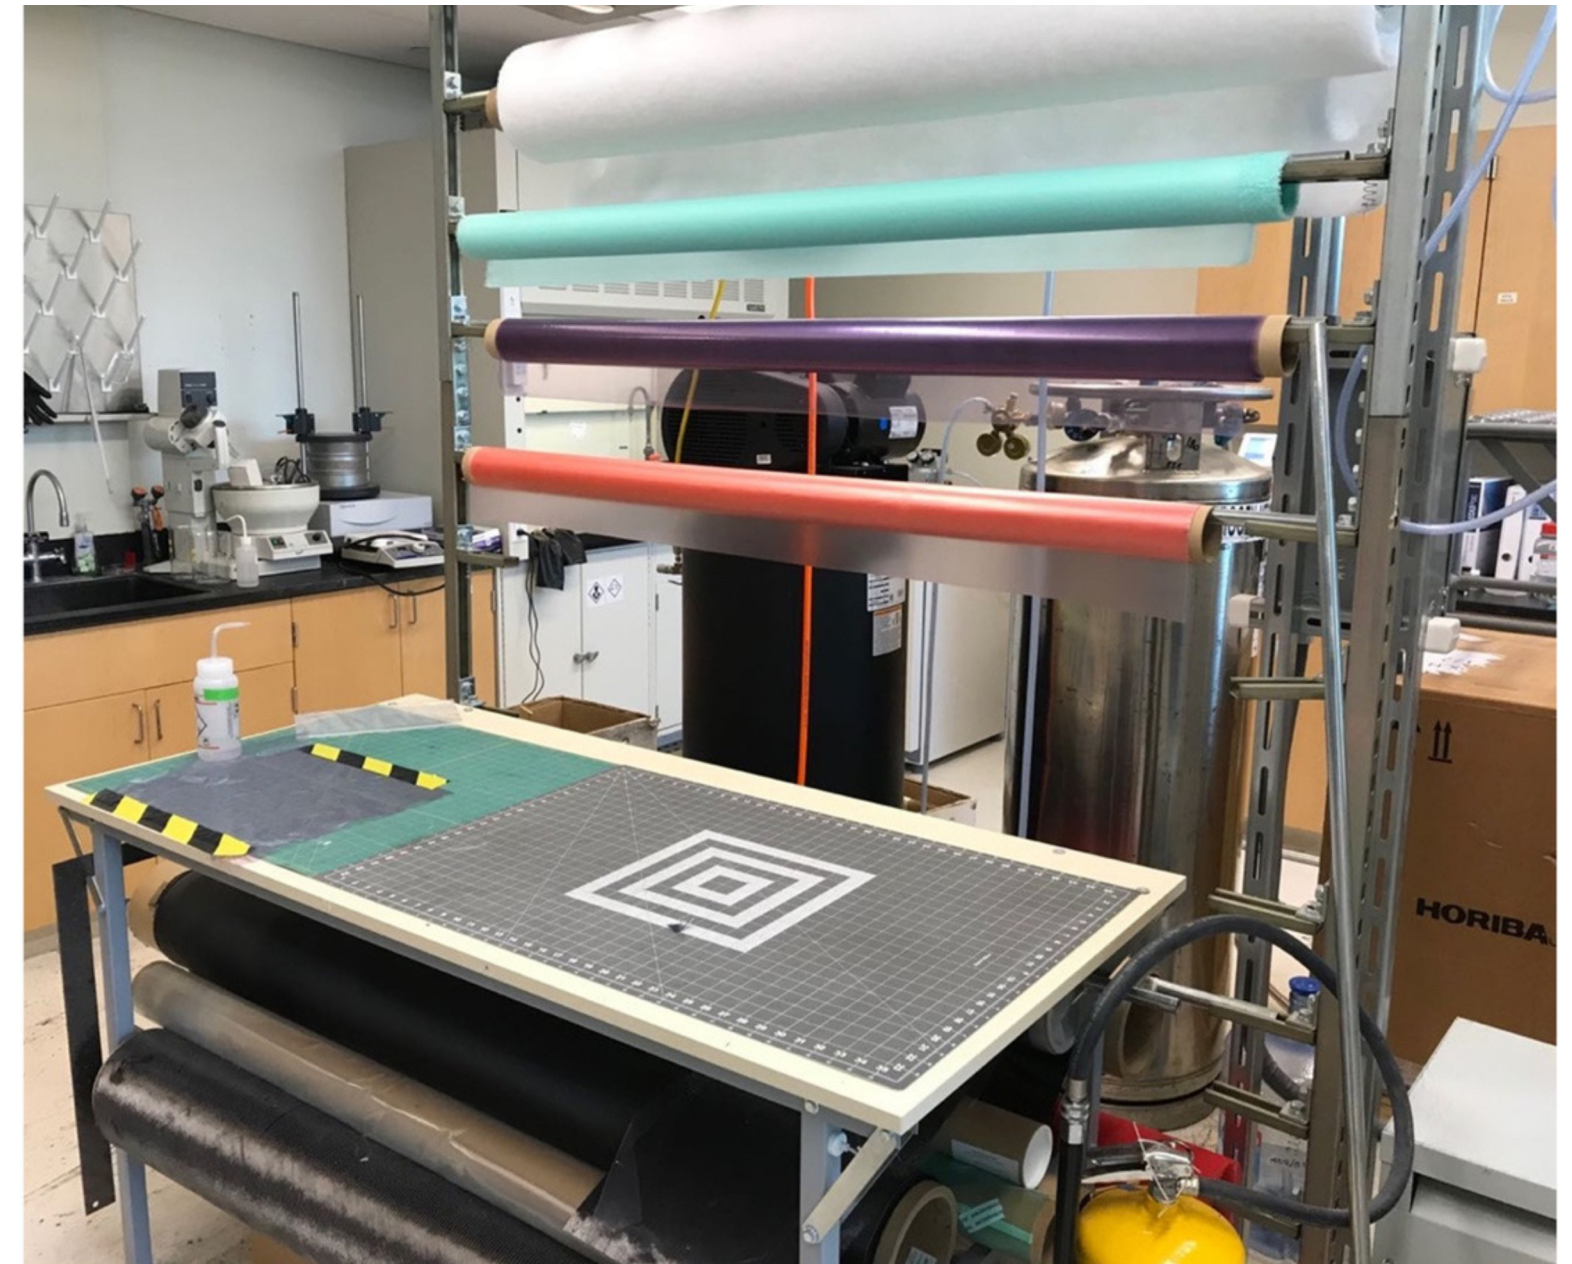

Institute for Design and Manufacturing Innovation (IDMI)

UC Irvine

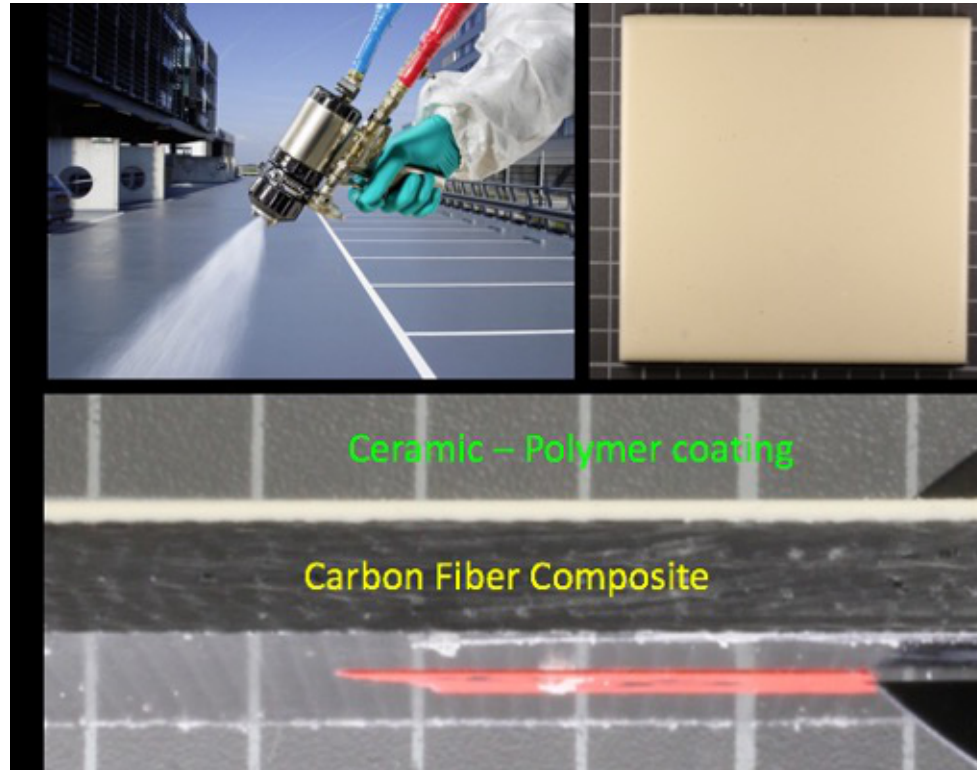


Composites Fabrication Platform

Some of our facilities include processing labs for manufacturing of fiber-reinforced composite materials with a broad range of design and material implementation that can be used in aerospace, automotive, infrastructure, sporting, and personal protection applications. This includes pre-preg and resin infused processes, as well as surface coating deposition. In addition, we have material synthesis capabilities including the manufacture of nanoscale fibers and particles.



Advanced Additive Manufacturing Platform

We also have a state-of-the-art facility for 3D printing and machining of multimaterial structures including metallic and ceramics, polymers and biological materials. This is supported by a broad range of additive manufacturing capability including Fused Deposition Modeling, Stereolithography, Selective Laser Sintering, Material Jetting, Powder Bed Fusion, Direct Ink Writing. Additional facilities include laser cutting and CNC milling.

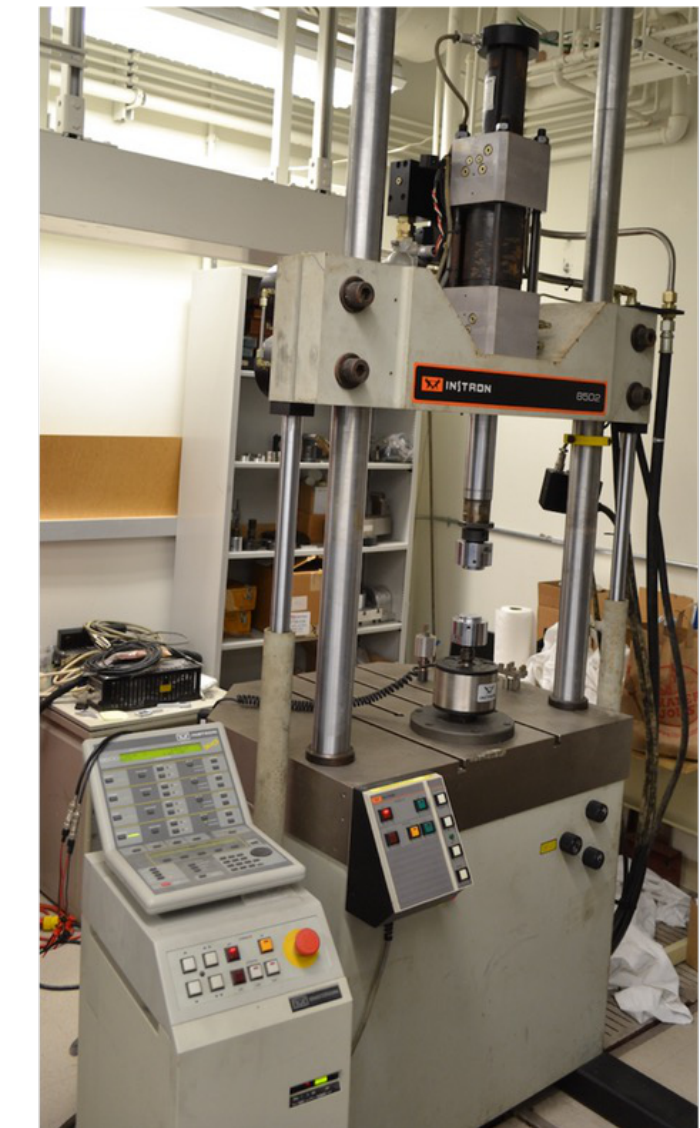

Mechanical Testing Platform

All of these manufactured materials can be mechanically evaluated via a series of macro, micro, and nanomechanical testing units at IDMI. These include a broad range of Instron, MTS, Bruker, and Agilent instruments capable of compression, tension, bending, shear mechanical tests. We also have advanced instrumentation for dynamic mechanical testing including high strain rate, drop tower, micro and nanoindentation as well as mechanical testing units that can provide in-situ micron and nanoscale characterization.

Institute for Design and Manufacturing Innovation (IDMI)

UC Irvine

Technology Type	Technology Capabilities
Material-Based	<ul style="list-style-type: none">• Testing Platforms for:<ul style="list-style-type: none">◦Composites fabrication• Testing fuel cell and electrolyzer materials, hydrogen pumps (including both PEM and AEM) at low and high temperatures:<ul style="list-style-type: none">◦Prescreening of catalysts using rotating disc electrodes;◦Membrane electrode assemblies evaluation with test stands (polarization, transport, EIS, durability testing)◦Test stands include T, RH, pressure control, CO-probes◦Gas product evaluation with GC◦IR imaging for temperature monitoring◦Multi-physics modeling capability



Smart Grid Energy Research Center (SMERC)

UCLA Smart Grid Testbed – Facility Overview

Address

420 Westwood Pl.
Los Angeles, CA 90095

Ombudsperson


Peter Chu
Project Lead Electric Vehicle and Renewable Energy Integration

P: 310.592.1242

E: peterchu@ucla.edu



The UCLA Smart Grid Testbed monitors and controls 117 level 1 and level 2 EV charging stations, 2 DC Fast Chargers, 135.2 kW Solar Panels, and 128.5 kWh of Battery Energy Storage System. The testbed allows integration of project partner's energy resources in a microgrid system through smart meters, controllers and sensor network.



The EV chargers in the Testbed are currently used by UCLA employees, fleet vehicles and residential charging at university housing. With 400+ active user participation to test on innovative energy management algorithms through mobile apps.



The Control Center in the testbed enables testing of various power management algorithms through easy access and control of all Distributed Energy Resources (DER) components in an aggregated manner.



Smart Grid Energy Research Center (SMERC)

UCLA Smart Grid Testbed – Facility Overview



28 Level 2 chargers in PS 9



100 kW PV in PS
9



2.5 kW mobile BESS cart with 200 W PV




56 kWh Saft BESS in PS
9



V2G System



50 kWh Microvast Li-ion Battery
with EPC Power Inverter

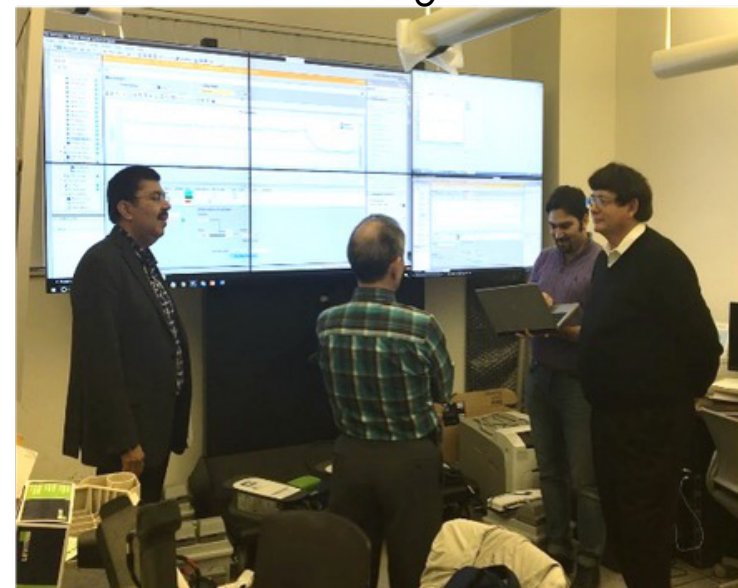


UCLA Microgrid control center



RTDS Simulation System



41 level 1 fleet chargers

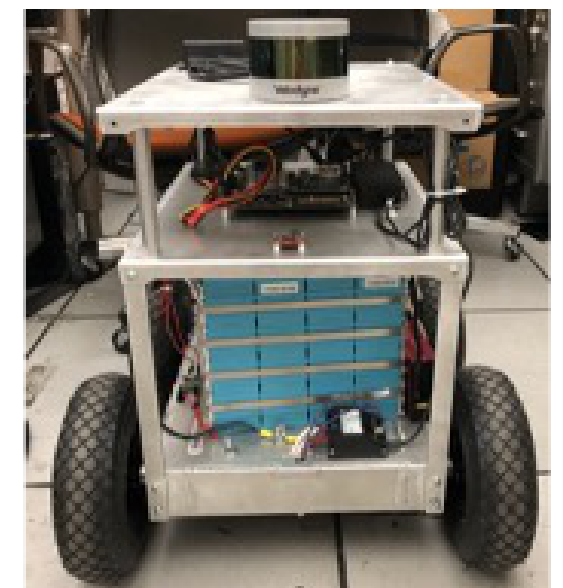

CAEV – ANTBOT™

Smart Grid Energy Research Center (SMERC)

UCLA Smart Grid Testbed – Facility Overview

Technology Type	Technology Capabilities
Internet of Things	<ul style="list-style-type: none">• Mobile App for User Participation – collect feedback and inputs from 400+ active user among UCLA faculties, employees and students. Testing of project partner’s EVSE and/or mobile apps for interface design, collect data for EV load prediction, User incentivized smart charging, AI based user behavior prediction and analysis.
Internet of Things	<ul style="list-style-type: none">• Analyzing the pairwise correlation of the sensor data within a system and detect abnormal data transmission. Riverbed © modeler allows for communication network modeling and simulation and test with scaled up communication network.
Grid Technologies	<ul style="list-style-type: none">• Microgrid Control Dashboard System – Microgrid visualization system with real time meter and sensor data. The dashboard system allows for testing of various charge scheduling algorithms (TOU pricing, priority charging, OpenADR 2.0, Duck Curve mitigation, load shifting) and perform data collection and analysis through convenient GUI provided in the Dashboard system.
Grid Technologies	<ul style="list-style-type: none">• BESS and Inverter Testing – Testing of project partner’s inverters or BESS on speed of response to grid signals, voltage regulation, reactive power compensation, load leveling with DCFC, balancing intermittent photovoltaic generation, duck curve mitigation.
Grid Technologies	<ul style="list-style-type: none">• Power Grid Simulation – ETAP® , RSCAD/RTDS, and IEC61850 gateway for scaled up grid impact and benefit analysis, integrated distribution network analysis, system planning and operations solution, hardware in the loop simulation, impact analysis of integrated DER, microgrid power system real time simulation
Grid Technologies	<ul style="list-style-type: none">• PS 9 Microgrid System – 250 kW capacity at 480 VAC 3P and 208 3P power lines. The microgrid system can test project partner’s energy device such EVSE, inverters, BESS, PV panels and switching gears in the microgrid operation (islanding and grid-tie), demand response testing, load leveling, peak shaving testing, cost and stability analysis.


Smart Grid Energy Research Center (SMERC)

UCLA Smart Grid Testbed – Facility Overview

Technology Type	Technology Capabilities
Transportation	<ul style="list-style-type: none">• EV Fleet Charging Management and Operations – Testing of EVSE and management applications via UCLA EV fleets in housing and facility management. Target testing includes maintenance team cost optimization via charge scheduling and circuit sharing, EV fleet charging management, EV fleet operations, etc.
Transportation	<ul style="list-style-type: none">• Testing of V1G and V2G enabled EVSEs and vehicles with SAE, CHAdeMO, OCPP and ISO protocols. EVSE circuit and stub ready for installation of your EVSE on UCLA Campus.
Energy Efficiency	<ul style="list-style-type: none">• Home of Future – Testing of project partner’s smart appliances (electric drier, refrigerator, HVAC, LED lighting, etc.) with communication protocols such as OpenADR, BACnet, DALI, DLMS for home energy saving and management, scheduling of energy consumption to minimize cost

PS 9 Microgrid System

UCLA Smart Grid Testbed

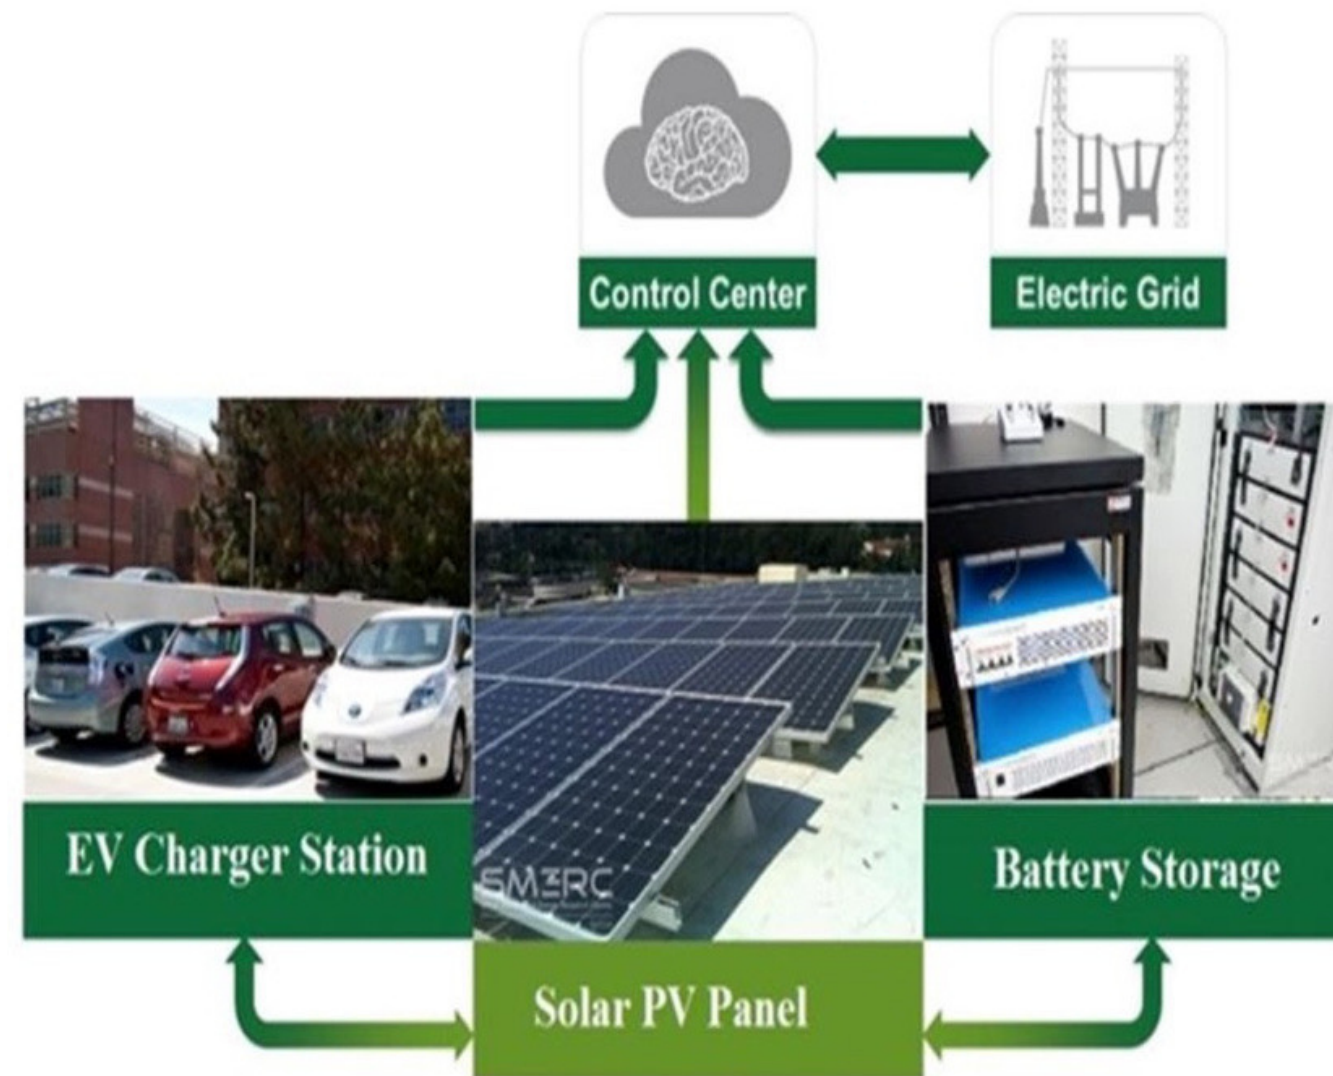

Description: P9 or Parking lot 9 microgrid consists of integrated solar, PV, EV chargers, and a battery storage facility in the heart of the campus. The DERs in this facility communicate with Cloud software and can be controlled remotely. Additional DER elements can be added to this facility and integrated with the rest of the assets for testing purposes.


Technology Type: Microgrid System and Optimization

Testing Capabilities:

- Testing of energy devices on the microgrid:
 - EVSEs
 - Inverters
 - BESS
 - PV panels
 - Switching gears (islanding and grid-tie)
- Testing of device control for energy management algorithms:
 - Testing of solar duck curve mitigation
 - Load leveling for Direct Current Fast Charging (DCFC) with Battery Energy Storage System (BESS)
 - Peak load shaving
- Collect Data for Benefit Analysis
 - Energy Cost and Efficiency Analysis
 - GHG emission reduction
 - Power Grid stability improvement

Mobile App for User Participation

UCLA Smart Grid Testbed

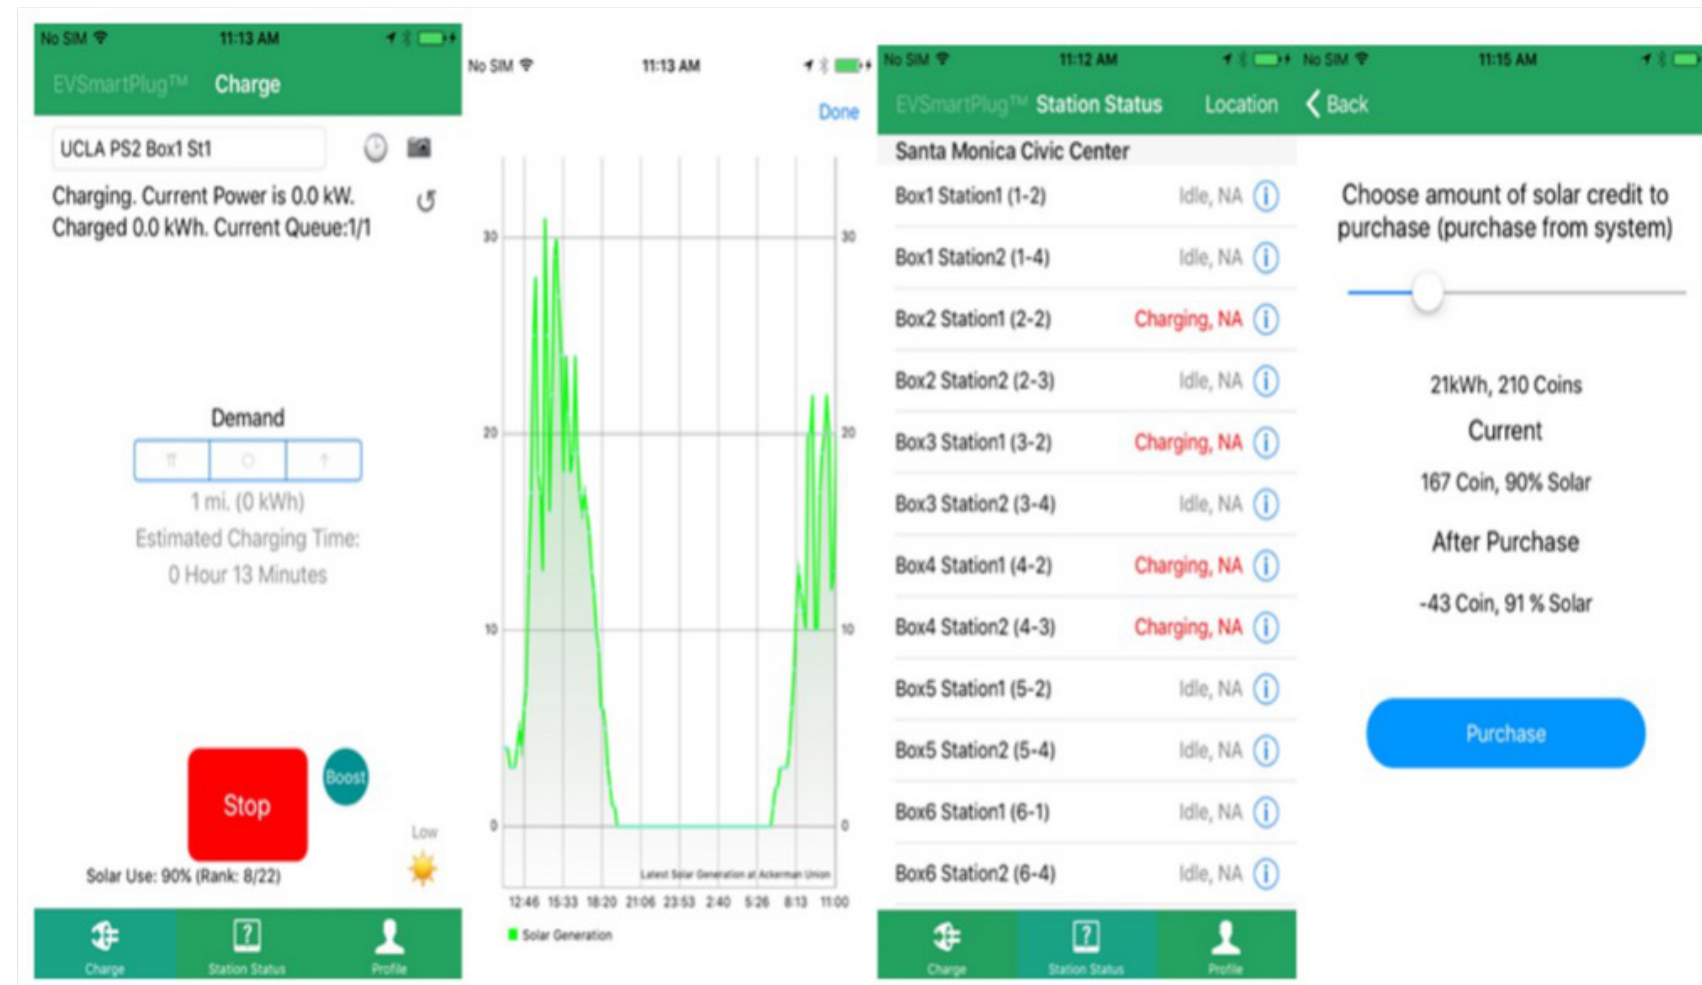

Technology Type: User Participation


Testing Capabilities:

- Collect feedback and inputs from 400+ active user among UCLA faculties, employees and students with multidisciplinary background
- Testing and collection of data for project partner's EVSE and/or mobile apps on:
 - Interface design
 - EV load prediction
 - User incentivized smart charging
 - AI based power load profile prediction, user behavior prediction and analysis

Description: Over 400 EV drivers in UCLA have signed up to the SMERC research testbed with each of them having the ability to use the ability to use mobile app. This mobile app can be customized depending on the testing needs of the project. Example of testing capability is shown above – testing of "local solar" utilization algorithm.

Microgrid Control Dashboard System – Data Analysis Platform

UCLA Smart Grid Testbed

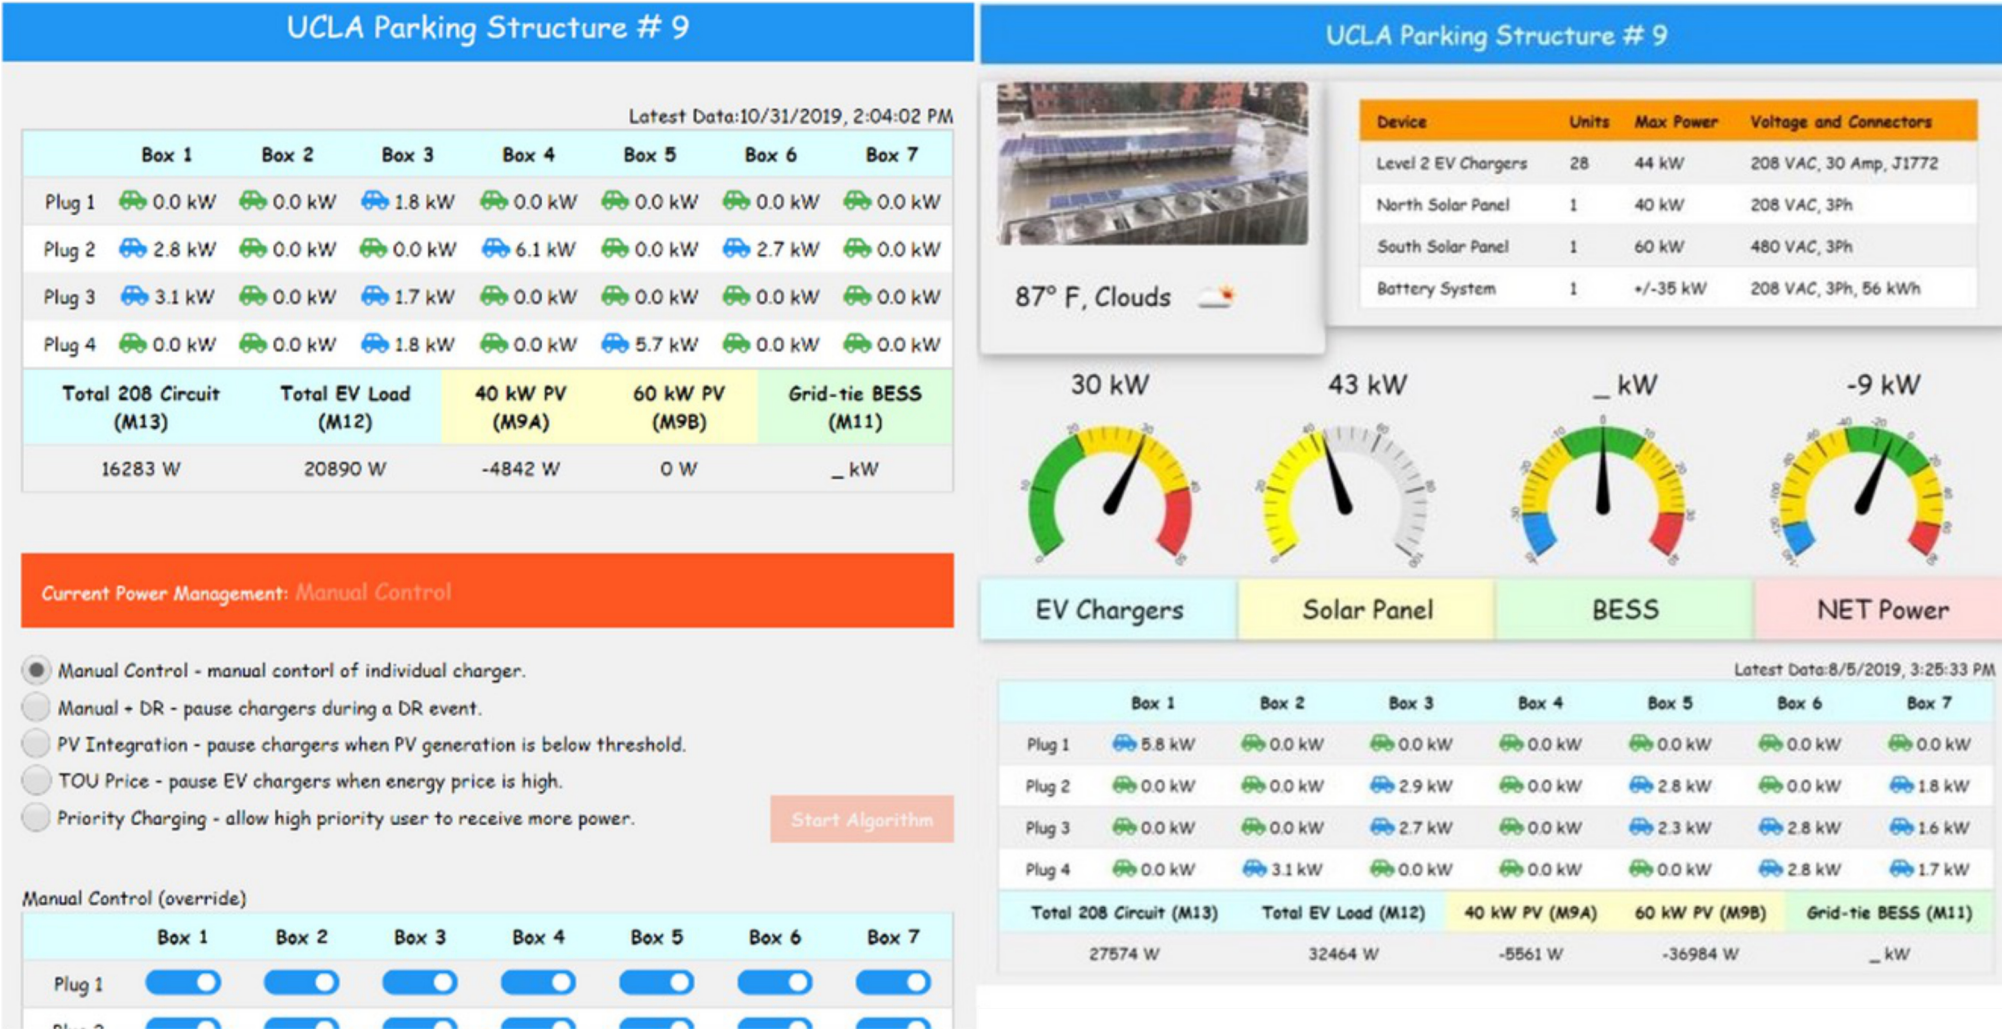

Technology Type: Control Center Visualization and Operation

Testing Capabilities:

- Microgrid Visualization System allows for real time meter and sensor data integration in a GUI based dashboard.
- The dashboard system allows for testing of various energy scheduling and management algorithms (TOU pricing, priority charging, OpenADR 2.0, Duck Curve mitigation, load shifting) for project partner's device or management algorithms.
- Perform data collection and analysis through convenient GUI provided in the Dashboard system.

Description: UCLA cloud software has a control center that enables real-time visualization of all the DER assets that are connected to the SMERC system in the UCLA campus. SMERC uses data science principles to perform data analysis in real time from the monitoring sensors connected to the DER assets.

V1G and V2G Testing

UCLA Smart Grid Testbed



Description: An array of smart chargers (with V1G capability) and two Vehicle to Grid (with V2G capability) chargers are available for testing of protocols, algorithms, and controls. Both DCFC and AC chargers are available for such testing. Car manufacturers can test V1 and V2G in this facility.

Technology Type: EV Smart Charging (V1G and V2G)

Testing Capabilities:

- EVSE:
 - Level 1 and level 2 smart chargers with circuit sharing
 - Mitsubishi i-MiEV Power box (1.5 kW bi-directional power flow)
 - Princeton Power CA 30 V2G DCFC (30 kW bi-directional power flow)
 - Bosch DCFC (30 kW DC Fast Charger)
 - Nissan (50 kW DC Fast Charger)
- Testing of Communication and Protocols
 - SAE J1772 and SAE J1772 CCS.
 - CHAdeMO
 - ISO 15118
 - OCPP

V1G and V2G Testing

UCLA Smart Grid Testbed



Microvast Li-ion Battery with EPC Power Inverter



Saft Li-ion Battery with OCC Inverters

Description: Two battery systems with inverters are available – one within a building and another in a parking structure – for testing of grid services. They are connected to high speed controllers which may be used to test fast response requirement from grid operators. This is an expandable facility to add additional battery storage or inverters for testing of larger scale as needed.


Technology Type: EV Smart Charging (V1G and V2G)

Testing Capabilities:

- BESS Testing
- Inverter Testing
- Grid Services via BESS and/or Inverter:
 - Speed of response to grid signals
 - Voltage regulation
 - 4 quadrant Reactive Power compensation
 - Load leveling with DCFC
 - Balancing intermittent Photovoltaic (PV) generation

Power Grid Simulation

UCLA Smart Grid Testbed

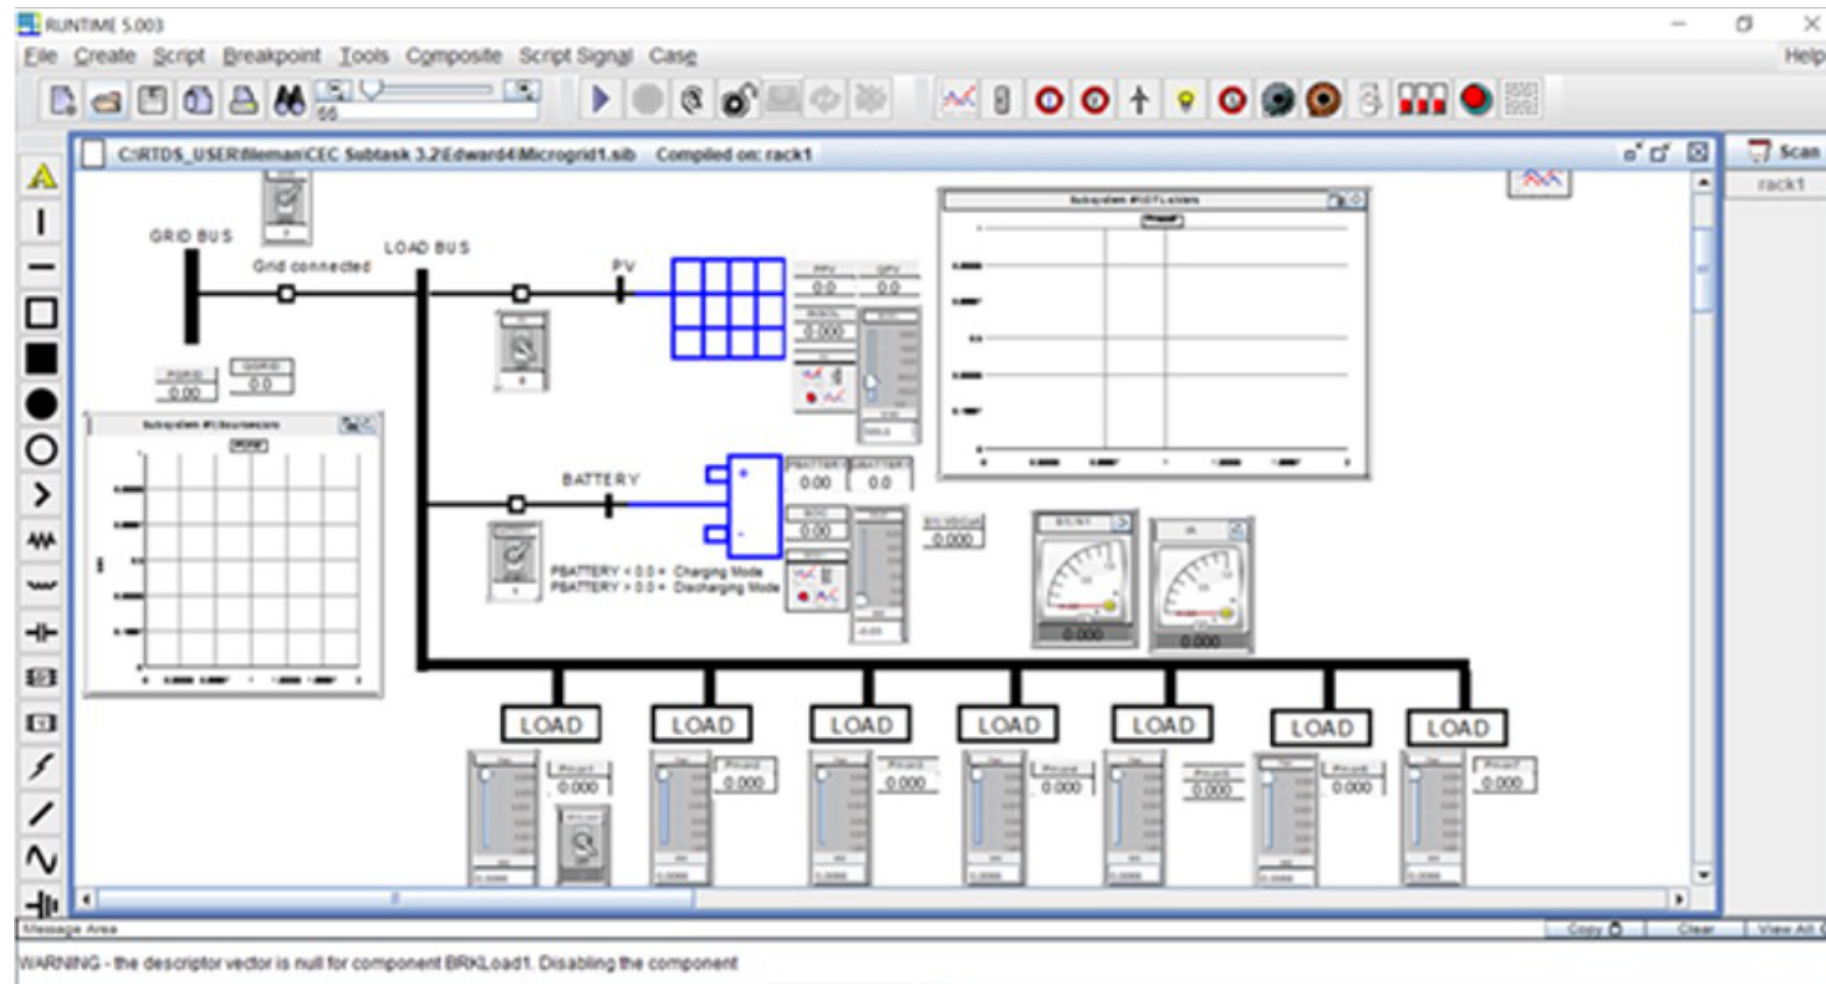

Description: ETAP® is an analysis platform for the design, simulation, operation, and automation of generation, distribution, and industrial power systems. RTDS is a real time simulator that allows hardware in the loop among other important functions. These systems enable virtual prototyping in advance of the building the real system.


Technology Type: Microgrid System and Optimization

Testing Capabilities:

- ETAP®
 - Scaled up grid impact and benefit analysis
 - Integrated distribution network analysis
 - System planning and operations solution
- RSCAD/RTDS real time simulator
 - Simulated Power System
 - Hardware in the loop simulation
 - Impact analysis of integrated DER
 - Microgrid power system real time simulation
- IEC61850
 - Virtual IEC61850 gateway for communication simulation

EV Fleet Charging Management and Operations – Sunset Village

UCLA Smart Grid Testbed

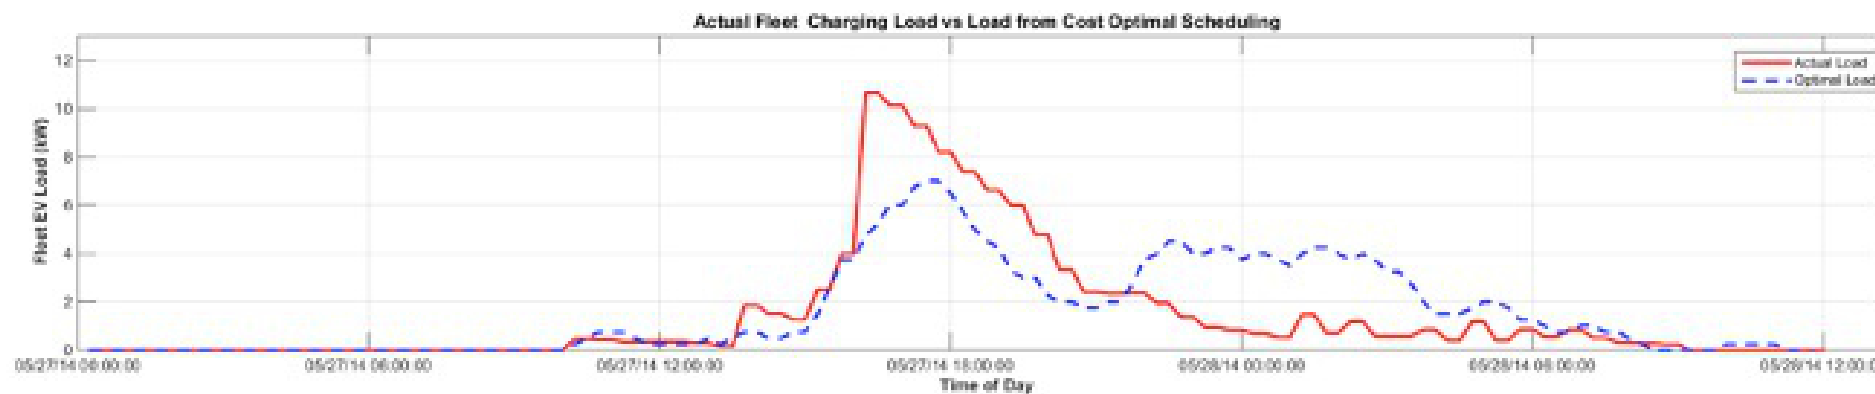


Technology Type: EV Fleet Operation and Scheduling

Testing Capabilities:

- EV Fleet Charging Management and Operations – Testing of EVSE and management applications via UCLA EV fleets in housing and facility management
- Target testing includes maintenance team cost optimization via charge scheduling and circuit sharing, EV fleet charging management, EV fleet operations, etc.

Description: UCLA Sunset Village has installed an array of chargers supporting UCLA fleet which can be used to study fleet operations of EV charging within a campus including energy consumption, scheduling of charging, demand charge management, etc.

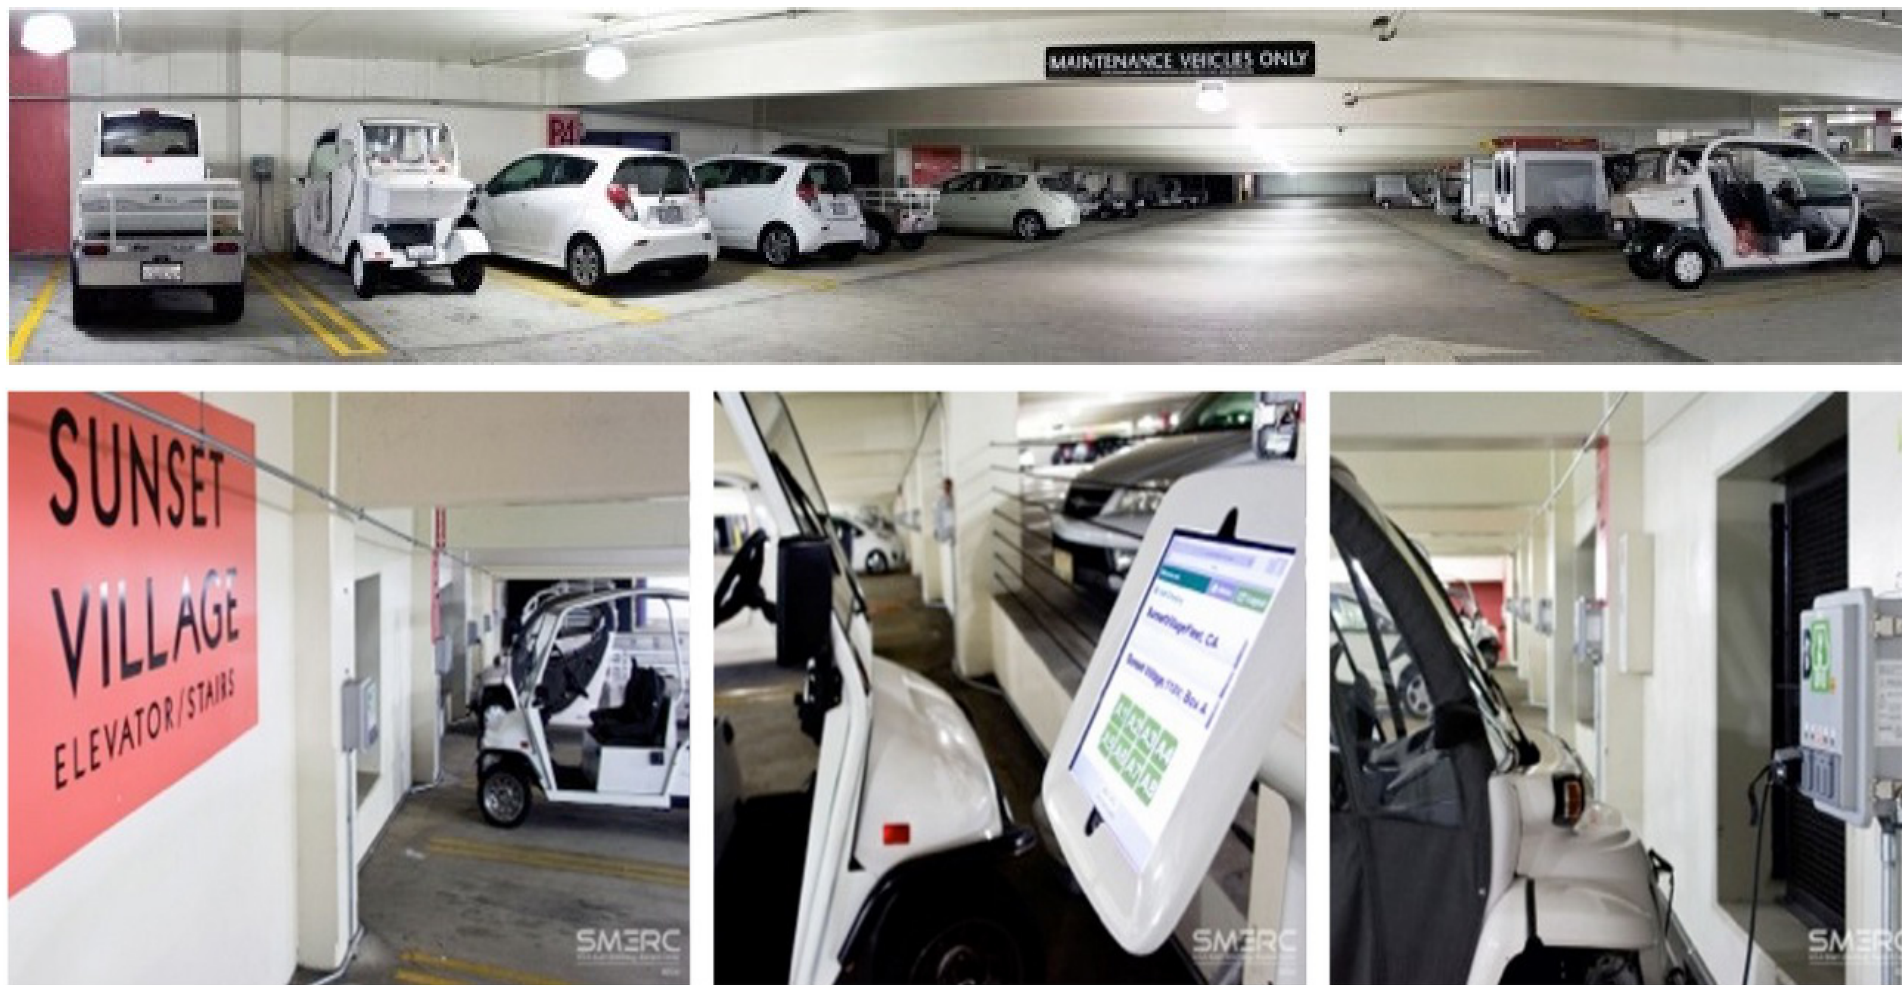

Home of Future



UCLA Smart Grid Testbed

Technology Type: Demand Response

Testing Capabilities:


- Home of Future – Testing of project partner's smart appliances – electric driver, refrigerator, HVAC, LED lighting, etc.
- Testing of communication protocols – OpenADR, BACnet, DALI, DLMS for home energy saving and management, scheduling of energy consumption to minimize cost

Description: Appliances such as refrigerators, electric clothes driers, LED lighting, have been outfitted with real-time communications and controls to enable testing of demand response programs, load management, or, peak reduction programs. Variety of protocol are supported in this infrastructure. Testbed can add new appliances, protocols, or algorithms for testing.

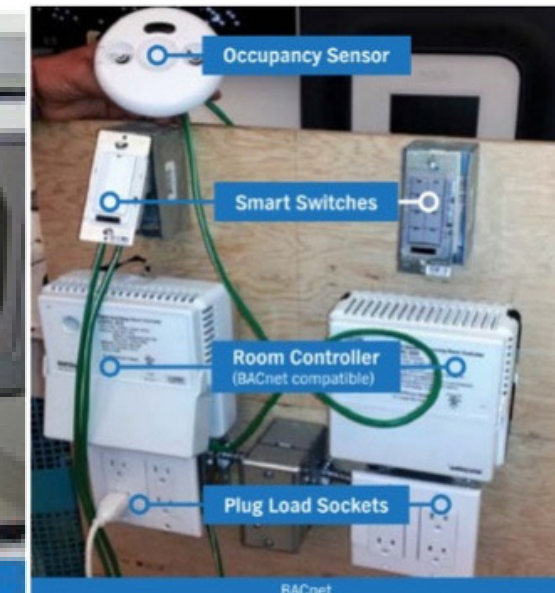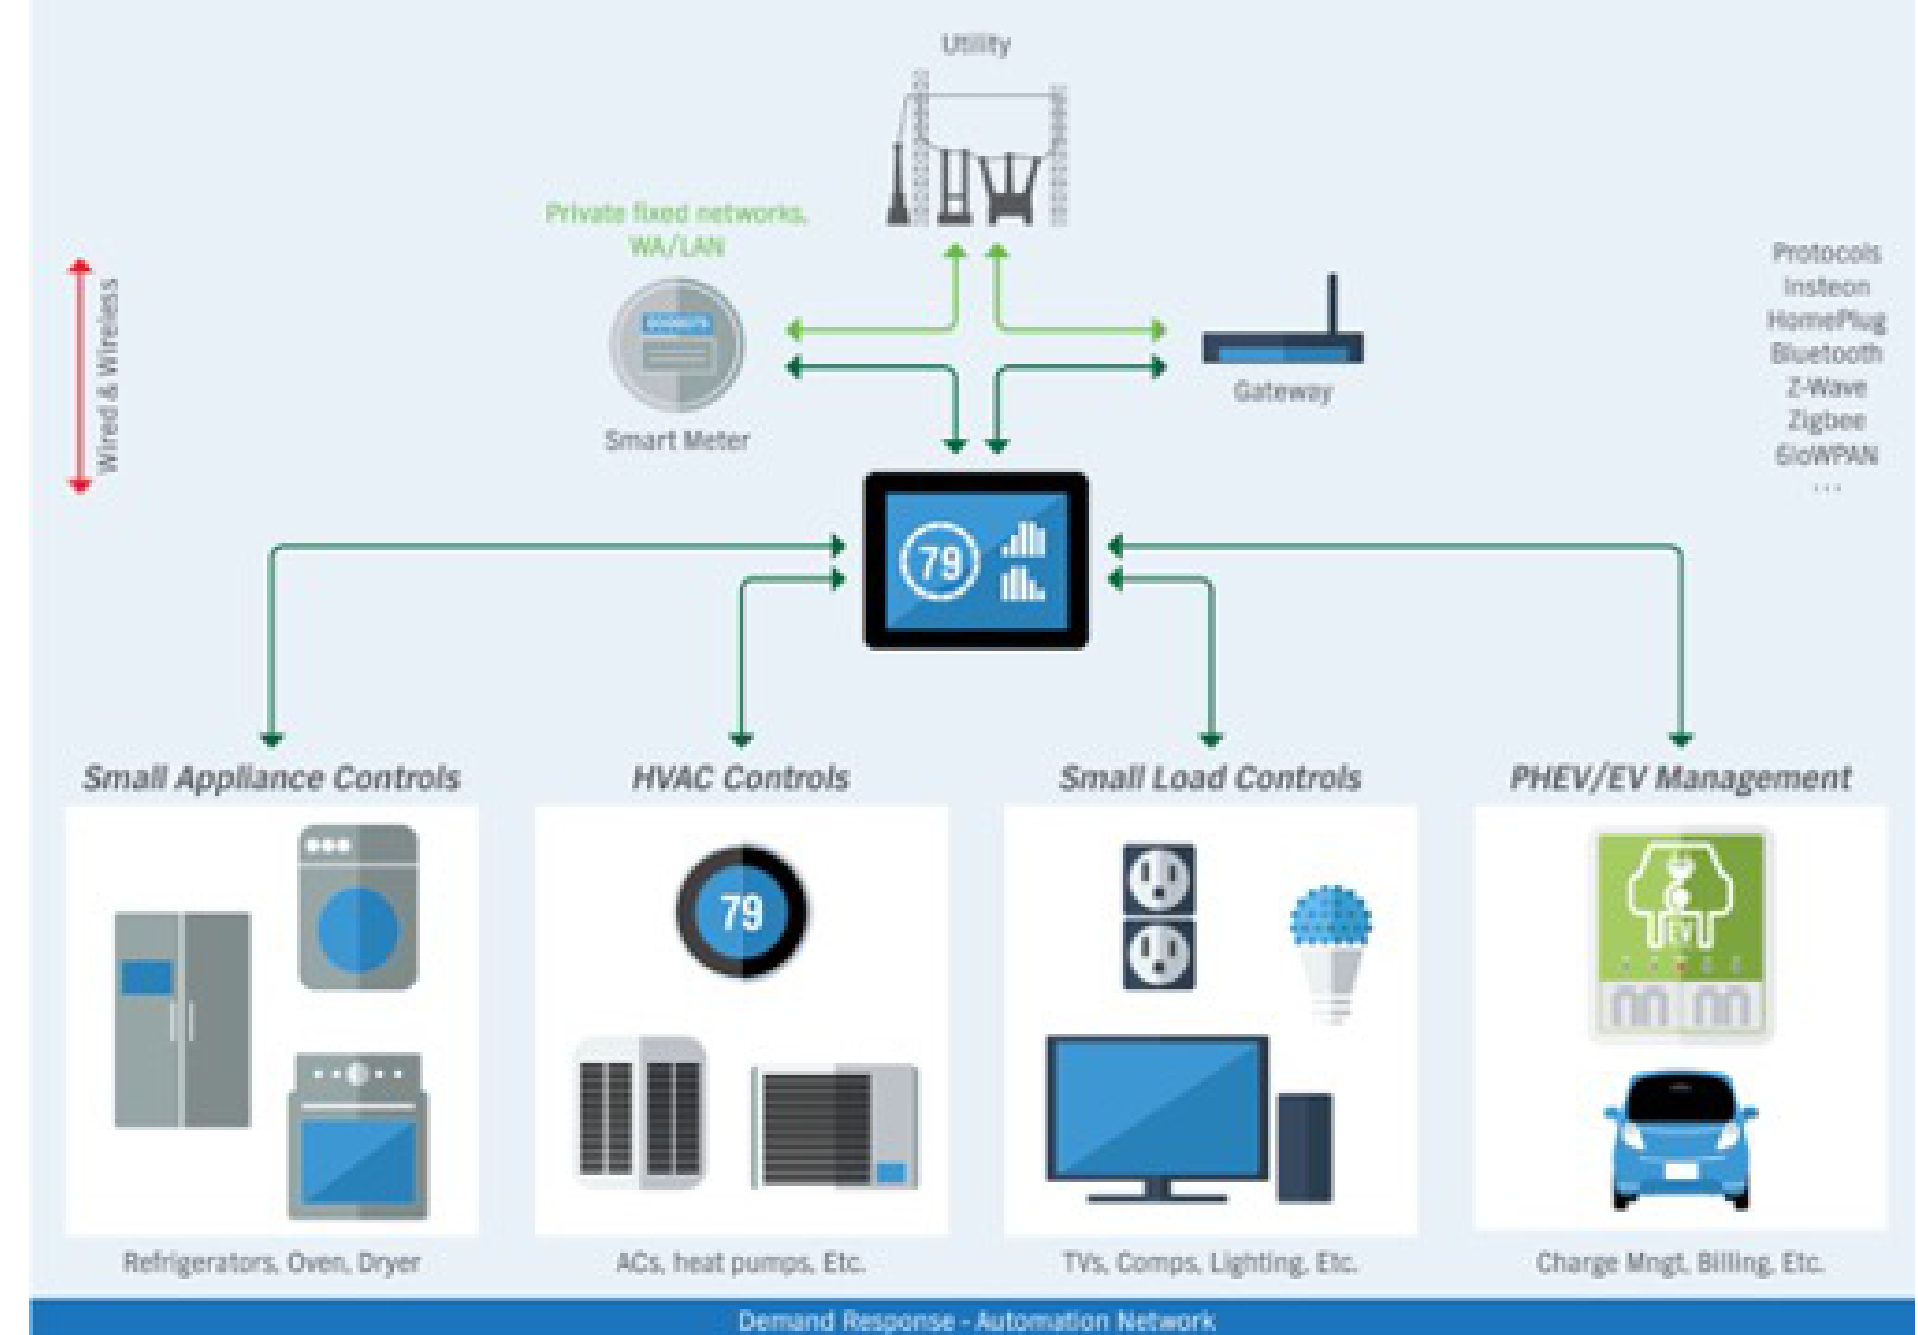


ANTBOT™ autonomous electric vehicle

UCLA Smart Grid Testbed

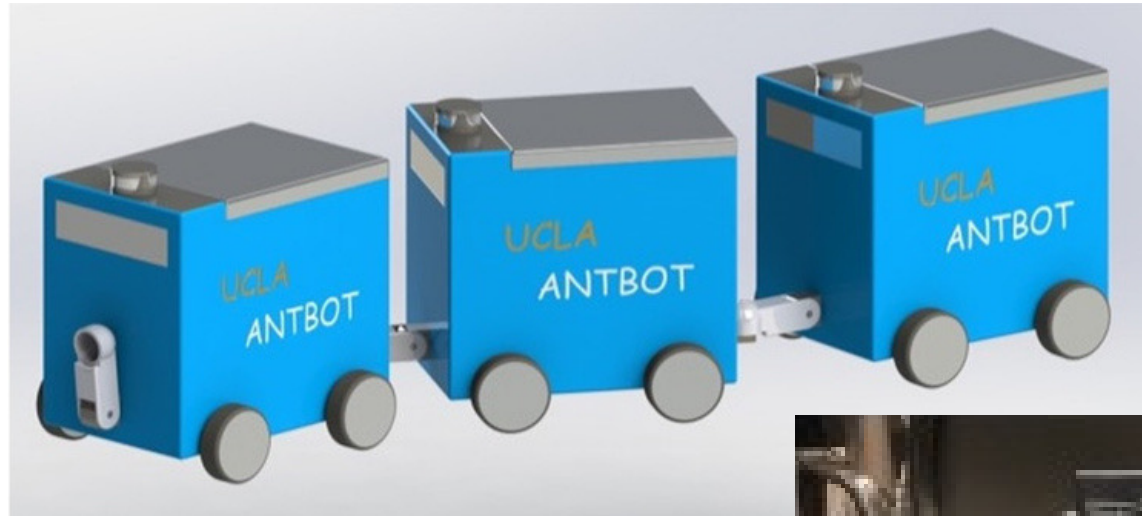

Description: UCLA has developed a mobile EV+AV platform controlled by software that uses real-time data from Velodyne LiDAR to navigate within campus. The architecture enables testing of third party hardware or software.

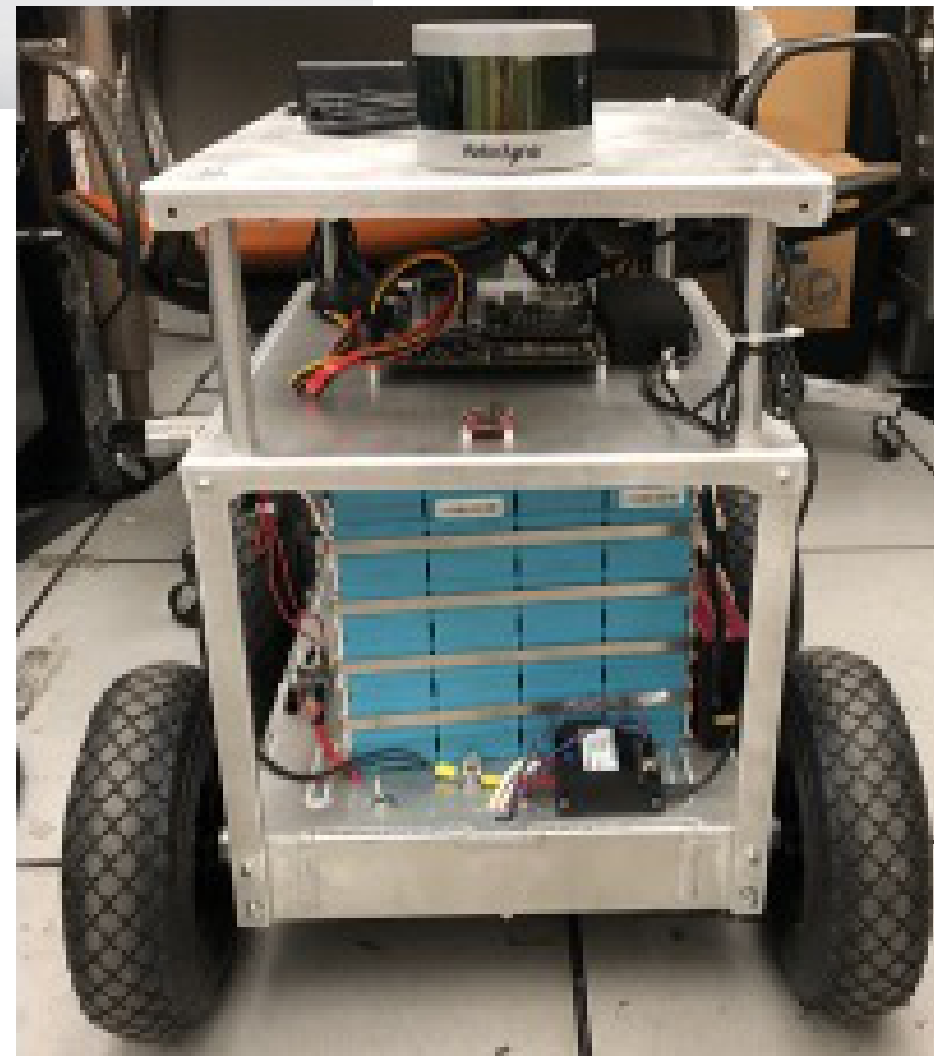


Technology Type: Microgrid System and Optimization

Testing Capabilities:

- Testing autonomous vehicles or their delivery applications within UCLA campus with UCLA autonomous navigation algorithms and hardware platform
- Hardware support:
 - Custom aluminum chassis and high-torque motors
 - 100Ah 24V LiFeMnPO4 Battery
 - NVIDIA Jetson TX2 embedded AI computer
 - Velodyne VLP-32 / VLP-16 LiDAR
 - Inertial Measurement Unit (IMU)
 - GPS
- Software and engineering support:
 - ROS, Carla software
 - ANTBOT™ conceptual autonomous vehicle
 - Last mile delivery vehicle design and testing
- Video demonstration available at https://smartgrid.ucla.edu.CAEV/troggie_v0.1.mp4

Autonomous Driving for Multi-Agent Environments

UCLA Smart Grid Testbed

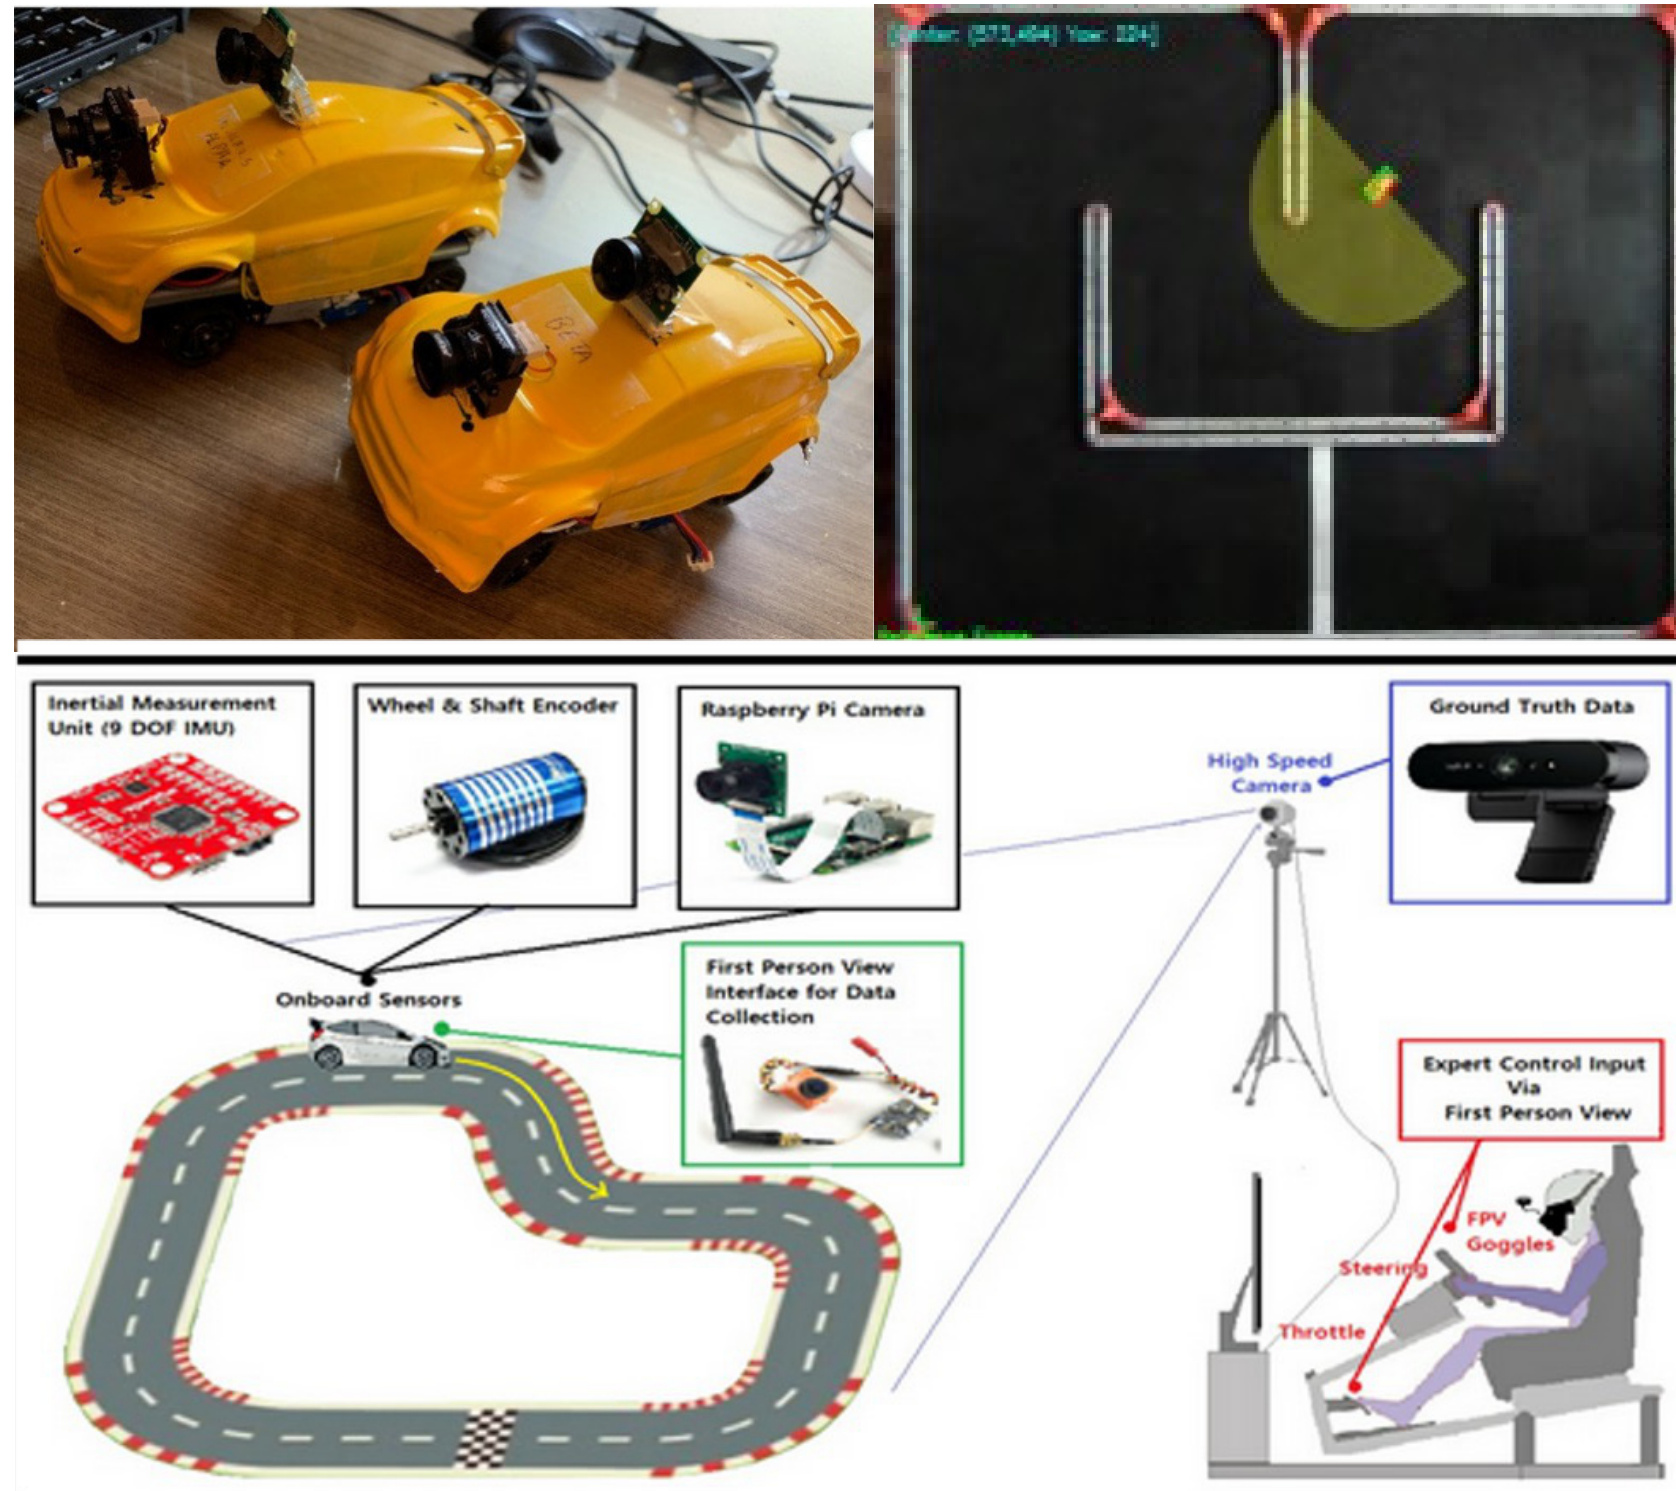

Technology Type: Connected Autonomous Electric Vehicles



Testing Capabilities:

- Analysis of Multi-Agent Scenarios
 - Indoor closed-loop circuit testbed with birds eye view
 - Ground truth tracking of multiple vehicles and their state information
- Analysis of High-Speed Scenarios
 - Identification of potential collisions
 - Evaluate driver behavior with problem specific data sets

Description: UCLA has developed a scaled down AV/EV testbed in which model vehicles can be tested for autonomous driving evaluation of driver behavior. Multiple vehicles can be driven on the test-track at a time creating a realistic simulation scenario in the lab.

Smart Grid Cybersecurity Testing and Analysis

UCLA Smart Grid Testbed

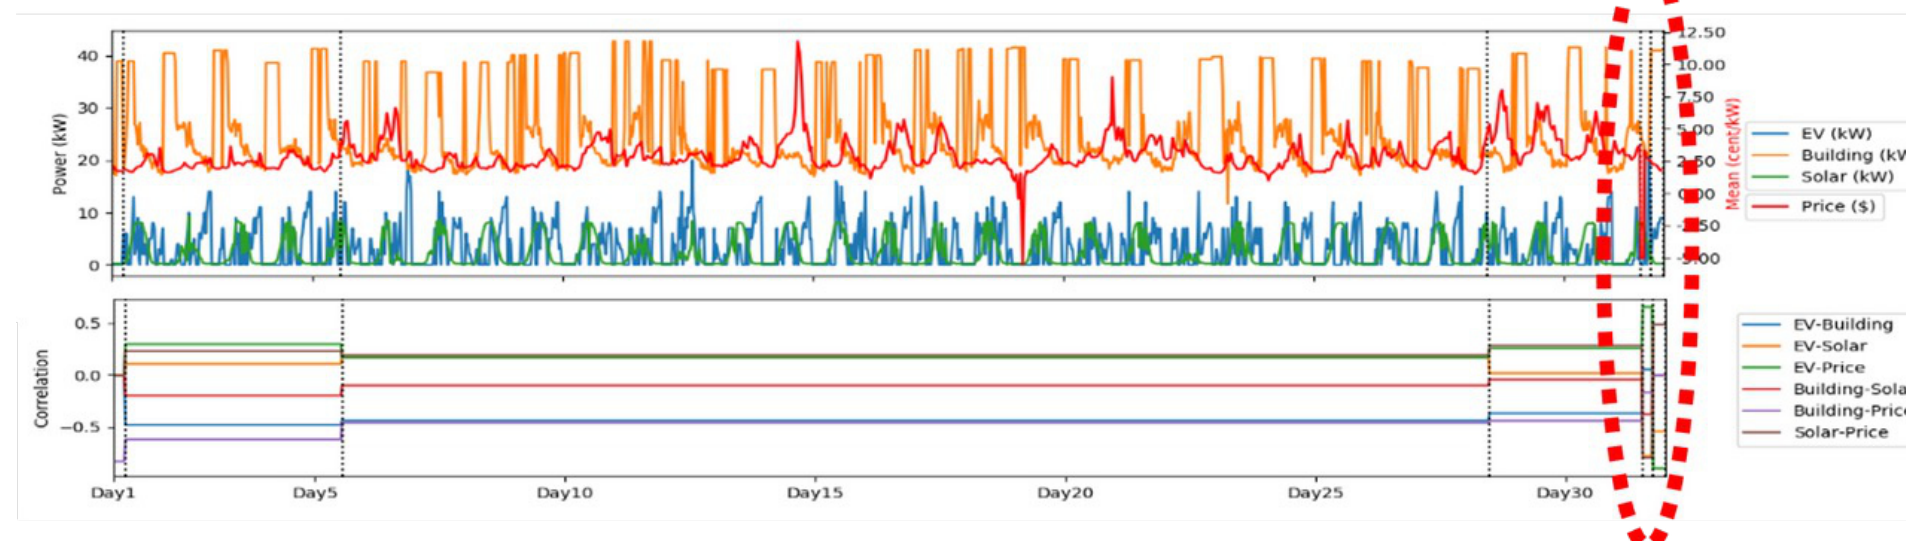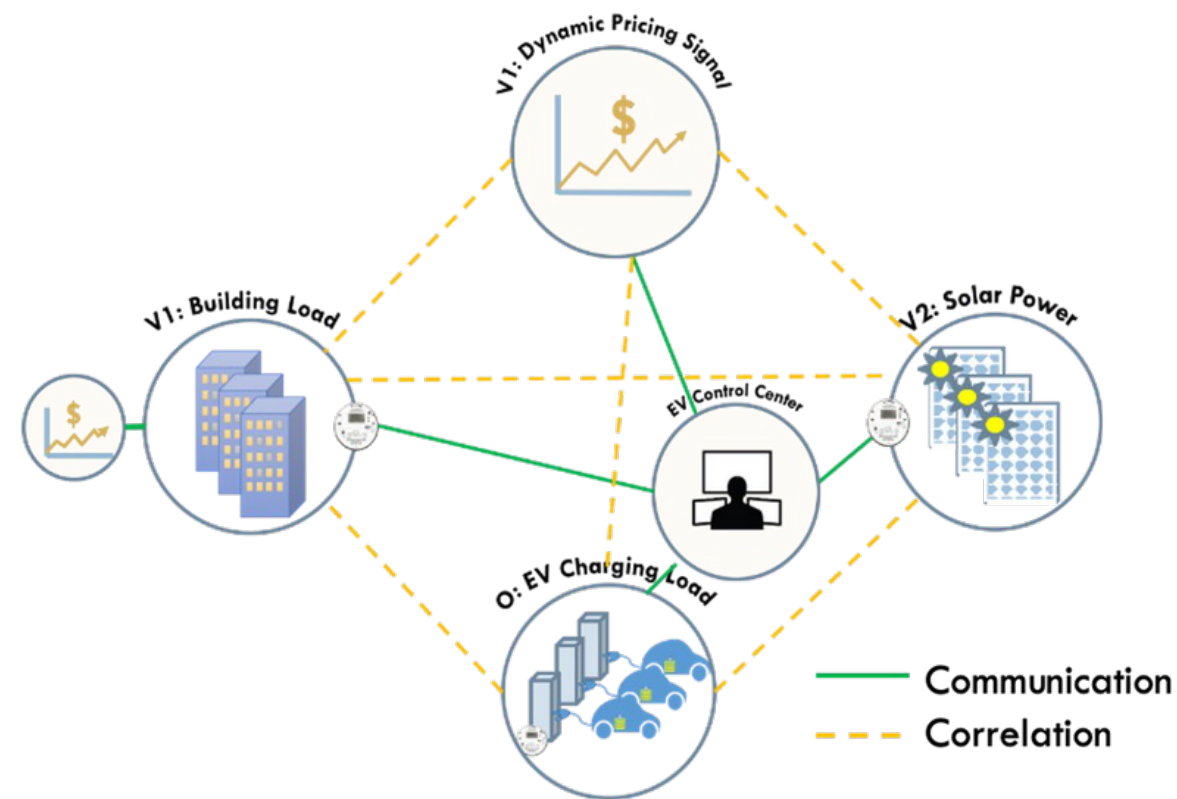

Technology Type: Cybersecurity Analysis

Testing Capabilities:

- Monitoring the status of a system
 - Sensor data transmitted within the network
- Analyzing the pairwise correlation of the sensor data within a system
 - Characterizing the normal state of the correlations
 - A sudden change in the correlation will be captured and identified as an anomaly
- Riverbed© Modeler Software
 - Communication network modeling and simulation
 - Scaled up network testing

Description: UCLA EV charging testbed is being used for cybersecurity testing and analysis. An EV charging management system has been modeled that controls and schedules EV load according to measurements of local building load, solar generation, and dynamic electricity price. Within this information network, any data replaced or modified by an attacker will disrupt the EV charging schedule and could cause damage to the electricity grid. The relationship of pairwise measures within the system to establish a correlation-invariant network and identify anomalous data within the network.

Smart Grid Energy Research Center (SMERC)

Santa Monica Testbed

Address

330 Olympic Dr.
Santa Monica, CA 90401

Ombudsperson

Peter Chu
Project Lead Electric Vehicle and Renewable Energy Integration

P: 310.592.1242

E: peterchu@ucla.edu



The Santa Monica Testbed contains one 30 kW V2G fast charger, 38 level 1 and level 2 EV chargers, 8.7 kWh of LiFePO3 Flexible mobile battery cart, one 213 kW Solar PV Panel and one NI PQA/PMU meter.



The EV chargers in the Testbed are used by general public, city employees and fleet vehicles. The Dashboard System allows monitoring and control of each individual charging station to support energy management in the power grid.



The Control Center in the testbed provides testing capability of various power management algorithms through V2G operation and control of all DER components in an aggregated manner.



Smart Grid Energy Research Center (SMERC)


Santa Monica Testbed



20 Level 1, EV chargers
Colorado Fleet Yard



+/- 30 kW V2G
DCFC station

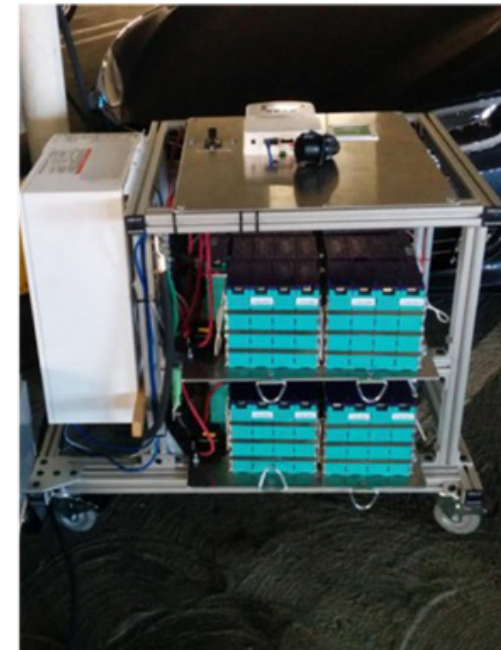


8.7 kW mobile Battery Cart



14 level 2 smart EV
charging stations



213 kW PV
With PMU/PQA

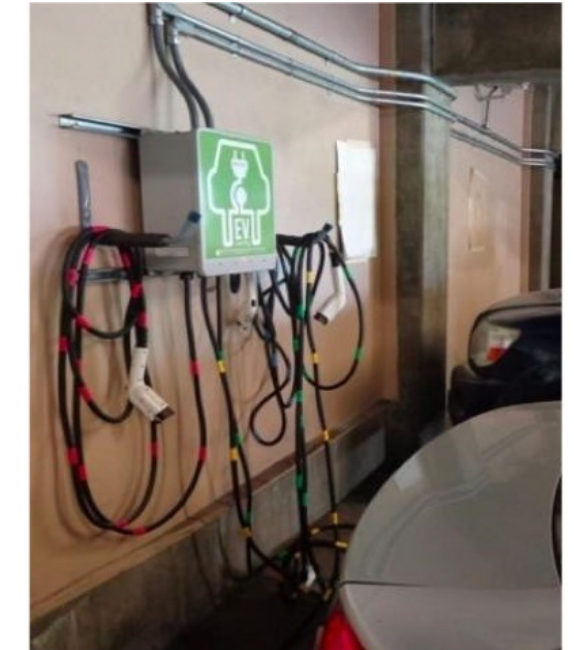

4 Level 2 smart EV
charging stations at
Santa Monica Hospital

Smart Grid Energy Research Center (SMERC)

Santa Monica Testbed

Technology Type	Technology Capabilities
Transportation	<ul style="list-style-type: none">• EV Fleet Charging Management and Operations – Testing of EVSE and management applications via City of Santa Monica’s EV fleets in facility management. Target testing includes maintenance team cost optimization via charge scheduling and circuit sharing, EV fleet charging management, EV fleet operations, etc.
Transportation	<ul style="list-style-type: none">• Level 2 Smart EV Charging System – testing of project partner’s EVSE on V1G functions.
Transportation	<ul style="list-style-type: none">• Testing of V2G enabled EVSEs and vehicles with SAE, CHAdeMO and ISO protocols.
Transportation	<ul style="list-style-type: none">• Testing of Portable Battery Energy Storage System – Support EV charging with flexible BESS, Islanding operation, Grid Service (demand response, load shifting, energy cost reduction).
Transportation	<ul style="list-style-type: none">• Power Quality Analyzer Integration – Testing of project partner’s device with Power Quality Analyzer (PQA), Using PQA to optimize and manage EV charging load and BESS power flow, power quality monitoring in parking structure.

EV Fleet Yard Charging Management System

Santa Monica Testbed



Technology Type: EV Fleet Operation and Scheduling

Testing Capabilities:

- Load Shifting
- Cost Optimization via Scheduling of Charging Management
- Power sharing to reduce capacity requirement and infrastructure cost
- EV Fleet Charging management

Description: Electric fleets serving municipalities have unique needs for energy, driving schedules and sustainability. If managed improperly, the charging can result in highly irregular power usage and high bills. The scheduling system automatically manages and schedules such EV charging.

EV Smart Charging (V1G) – Santa Monica Civic Center and UCLA Santa Monica Hospital

Santa Monica Testbed

Technology Type: EV Smart Charging (V1G)

Testing Capabilities:


- Multiplexer for circuit sharing
- Smart charging algorithms with user participation
- Grid Service:
 - Load Shifting
 - Demand Response (DR)
 - Energy cost reduction

Description: EV charging, when managed properly and with scale, can help grid operators with their needs. Utilities' needs such as DR can be supported with proper management and protocols of EV chargers with minimal disruption to the drivers.



Vehicle-to-Grid (V2G) Test Bed

Santa Monica Testbed

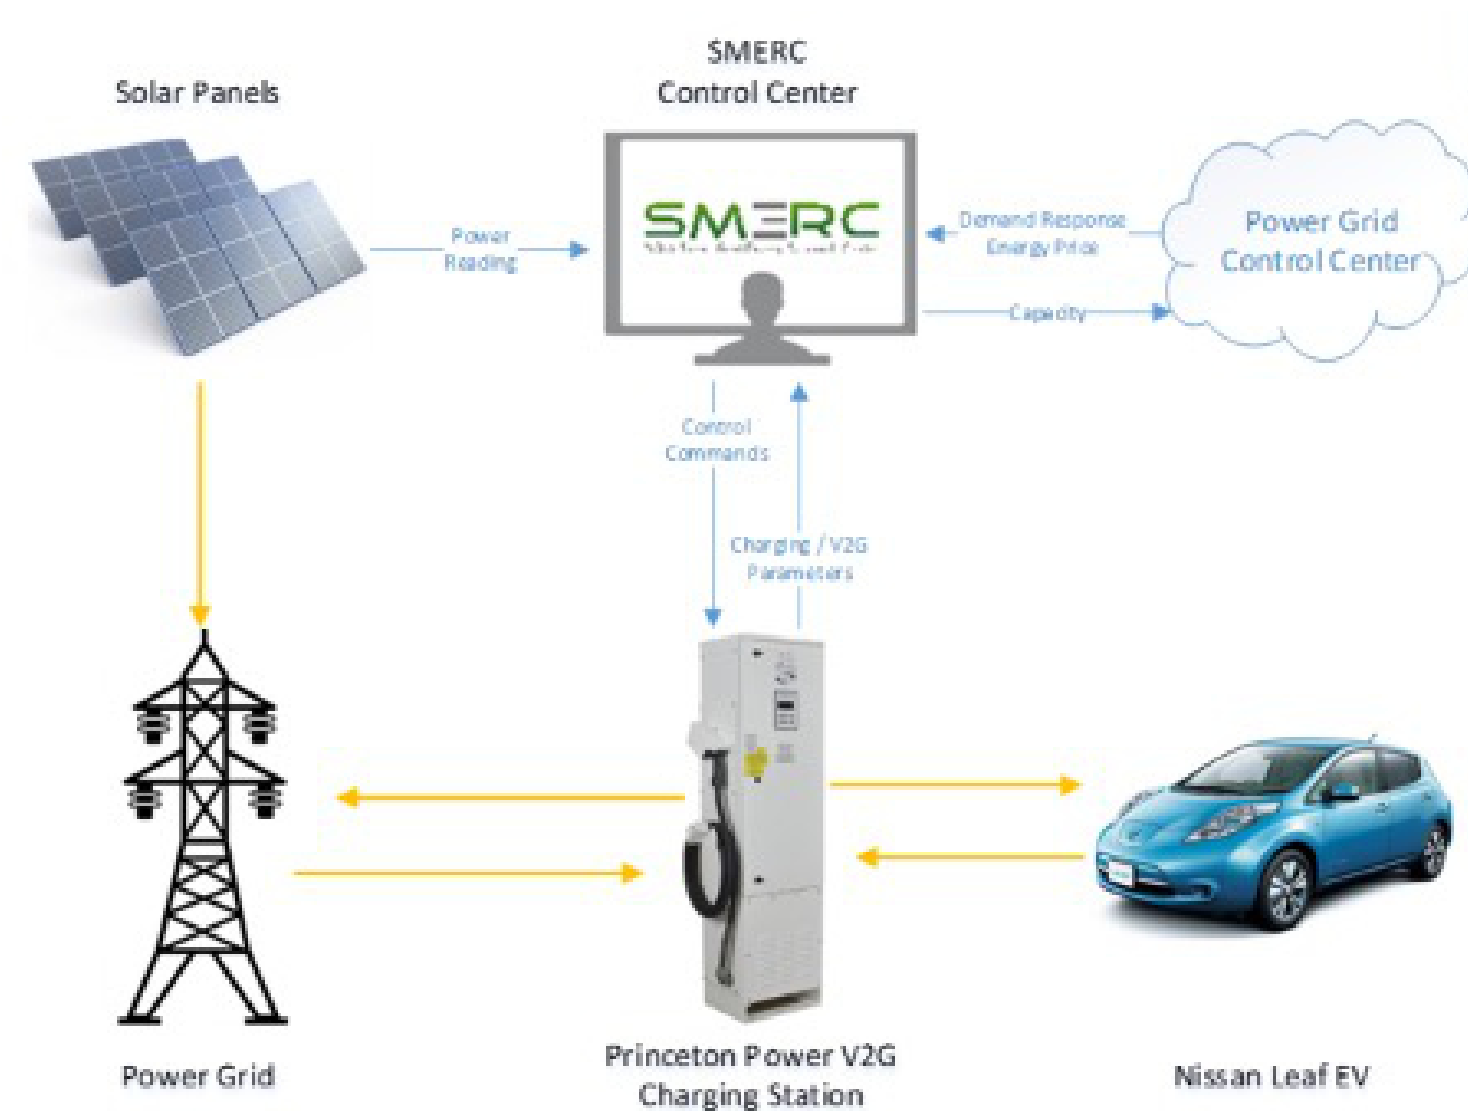

Technology Type: EV Smart Charging (V2G)


Testing Capabilities:

- Bi-directional power flow to support power grid
- Grid Service via V2G support
 - Voltage regulation
 - Demand response
 - Duck curve mitigation
 - Vehicle-to-Building and Vehicle-to-Home capability testing

Description: V2G system developed at UCLA integrates software for scheduling when to charge and discharge an EV and hardware (Princeton Power and Mitsubishi supporting CHAdeMO DC based V2G). The system also performs Vehicle-to-Building or Vehicle-to-Home capability as needed. The value of V2G is for backup power as well as grid support needs.

Portable Battery Energy Storage System


Santa Monica Testbed

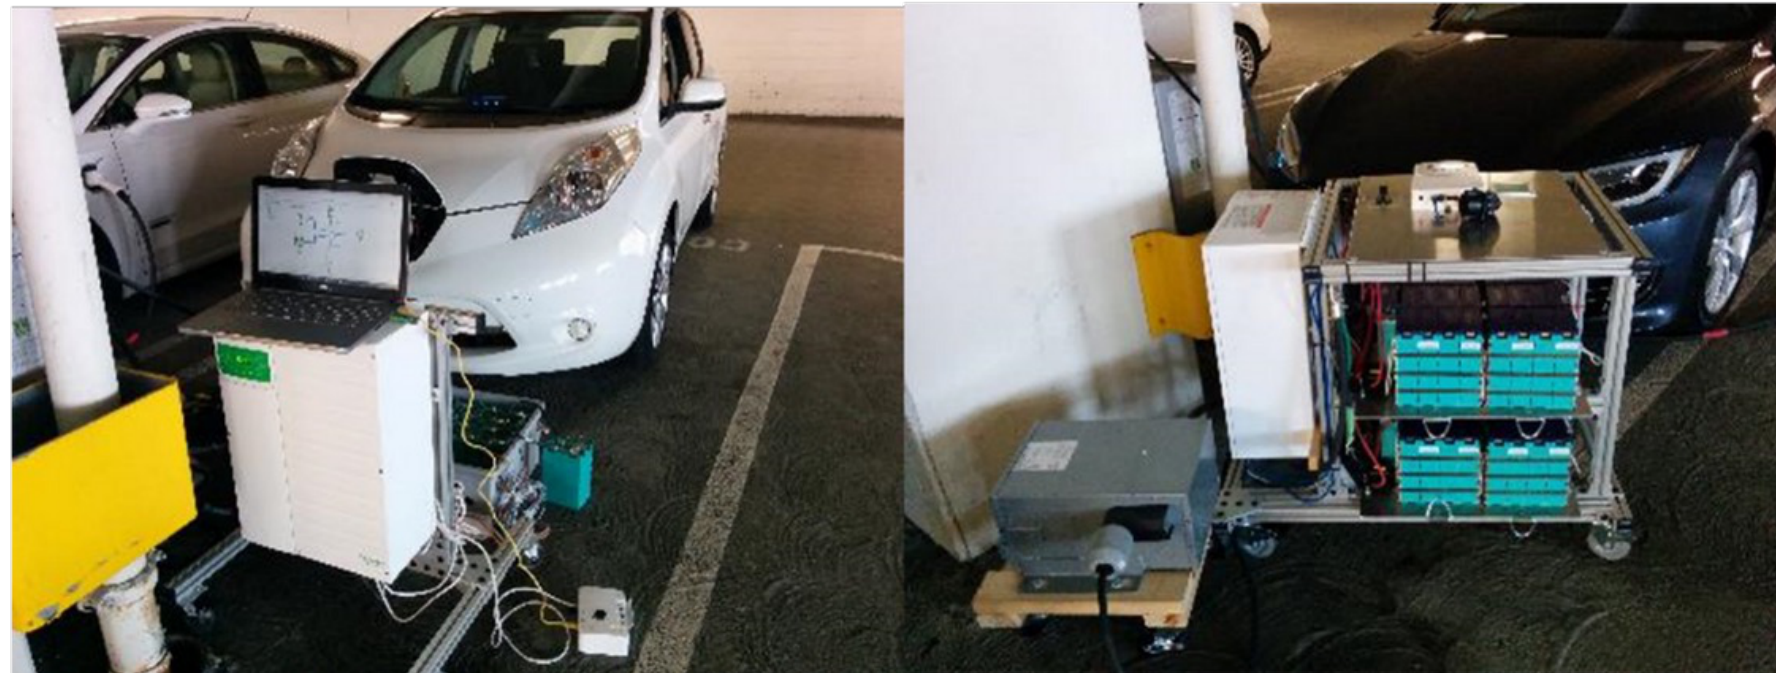

Technology Type: BESS and Inverter

Testing Capabilities:

- Testing of BESS and Inverters
- Support EV charging with flexible BESS
- Islanding operation
- Grid Service:
 - Demand Response
 - Load Shifting
 - Energy Cost Reduction

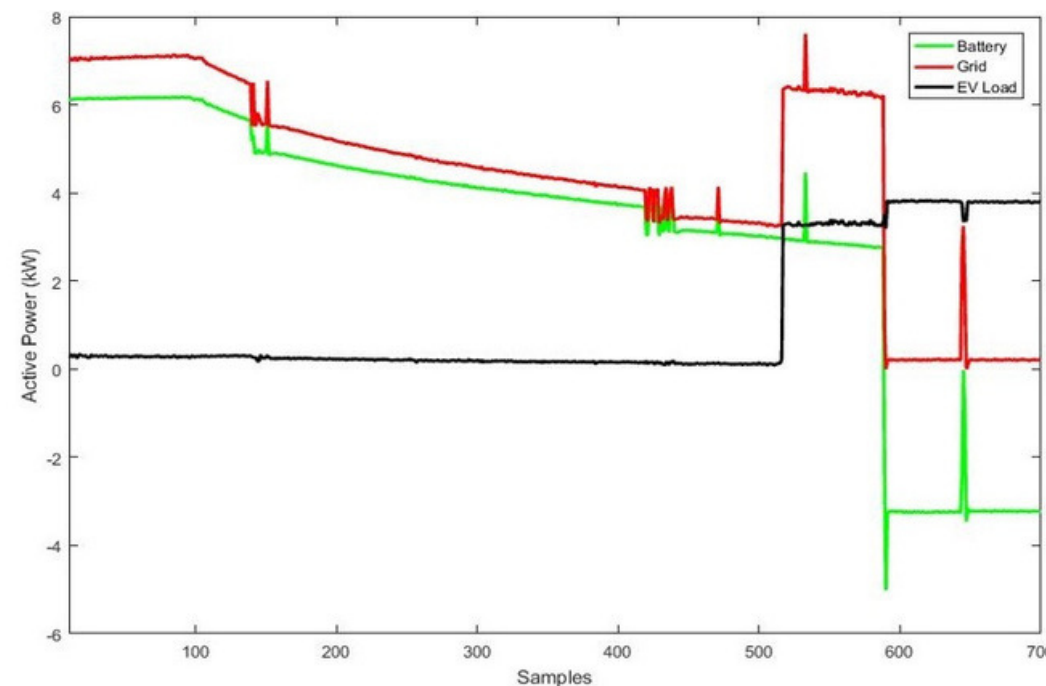

Description: The portable BESS enables localized energy storage and delivery of energy to other locations in the garage such as charging an EV or providing additional power. This platform can be used for testing of batteries, inverters, microgrid control systems or software.

Power Quality Analyzer Integration

Santa Monica Testbed



Technology Type: Power Quality Analyzer (PQA)

Testing Capabilities:

- Test your energy device's power quality
- Power Quality Analyzer (PQA) with Solar Panel
- Using PQA to optimize and manage EV charging load and BESS power flow
- Power quality monitoring in parking structure

Description: PQA installed in the Santa Monica Civic Center garage provides data on power quality which in turn may be impacted by solar PV or EV charging. If power quality starts to deteriorate in parking structures, eventually, it can result in grid collapse, therefore PQA can not only measure the power quality, but when integrated with other DER assets such as BESS or EV chargers, it can stabilize the local microgrid.

Smart Grid Energy Research Center (SMERC)

Pomona SCE Testbed

Address

265 N East End Ave.

Ombudsperson

Peter Chu


Project Lead Electric Vehicle and Renewable Energy Integration

P: 310.592.1242

E: peterchu@ucla.edu



The Pomona SCE Testbed contains one level 2 Smart EV charger (4 level 2 charging stations). The EV chargers in the Testbed are used by employees and SCE visitors at SCE EV Technical Center.



UCLA has a quad charger installed at the Southern California Edison Pomona Test Labs in their parking lot. It is a networked charger and is used for current sharing. User behavior tests can be performed with this or other chargers at this site.



Smart Grid Energy Research Center (SMERC)

Pomona SCE Testbed

Technology Type	Technology Capabilities
Transportation	<ul style="list-style-type: none">• Level 2 Smart EV Charging System – Multiplexer for circuit sharing, smart charging algorithms with user participation, Grid Service (load shifting, demand response, energy cost reduction).

Smart Grid Energy Research Center (SMERC)

Pasadena Testbed

Address

150 E Holly St.
Pasadena, CA 91103

Ombudsperson

Peter Chu
Project Lead Electric Vehicle and Renewable Energy Integration

P: 310.592.1242

E: peterchu@ucla.edu



The Pasadena Testbed contains 32 power usage monitoring and control devices for commercial EV chargers within the city of Pasadena.



The EV chargers in the Testbed are used by the public.



Monitor and Control of Existing EV Chargers

Pasadena Testbed

Monitor and Control of Existing EV Chargers

Technology Type: Energy Efficiency - EV Smart Charging

Testing Capabilities:

- Monitoring and Control of Commercial EV Chargers
- Energy usage statistics for billing
- Grid Service:
 - Load Shifting
 - Demand Response
 - Energy cost reduction

Description: UCLA has installed in Pasadena city public parking structures, its EV monitoring and control capability which includes software and hardware. The network enables understanding of energy consumption in public EV charging scenarios which assists in understanding how grid services may be offered.



Smart Grid Energy Research Center (SMERC)

Pasadena Testbed

Technology Type	Technology Capabilities
Transportation	<ul style="list-style-type: none">• Monitoring and Control of Existing EV Chargers – Monitoring and Control of Commercial EV Chargers. Energy usage statistics for billing, Grid Service (load Shifting, demand response, energy cost reduction).



UNIVERSITY OF CALIFORNIA
MERCED

Advanced Solar Technologies Institute (UC Solar)

UC Merced

Address

5200 North Lake Rd.
Merced, CA 95343

Point of Contact


Sarah Kurtz, PhD
Professor, University of California Merced
Reno Ferrero Family Chair in Electrical Engineering

P: 303.881.5085

E: skurtz@ucmerced.edu



UC Merced has well established test beds and laboratories for pre-commercial testing of new technologies in a "living lab" environment.



UC Solar's 1-megawatt solar photovoltaic system which has been in operation since 2009 providing needed electrical energy on the campus, and consistently exceeding performance expectations. The solar thermal team has been operating a testbed for characterizing solar collectors from 100 to 250 Celsius for the last 10 years. The testbed for solar thermal driven cooling/drying/desalination is also available for data collection.




Advanced Solar Technologies Institute (UC Solar)

UC Merced



UC Solar creates technologies that make solar energy systems more efficient, more affordable, and the best choice for the people of California and the world. In addition, UC solar educates and develops tomorrow's solar energy leaders and entrepreneurs.

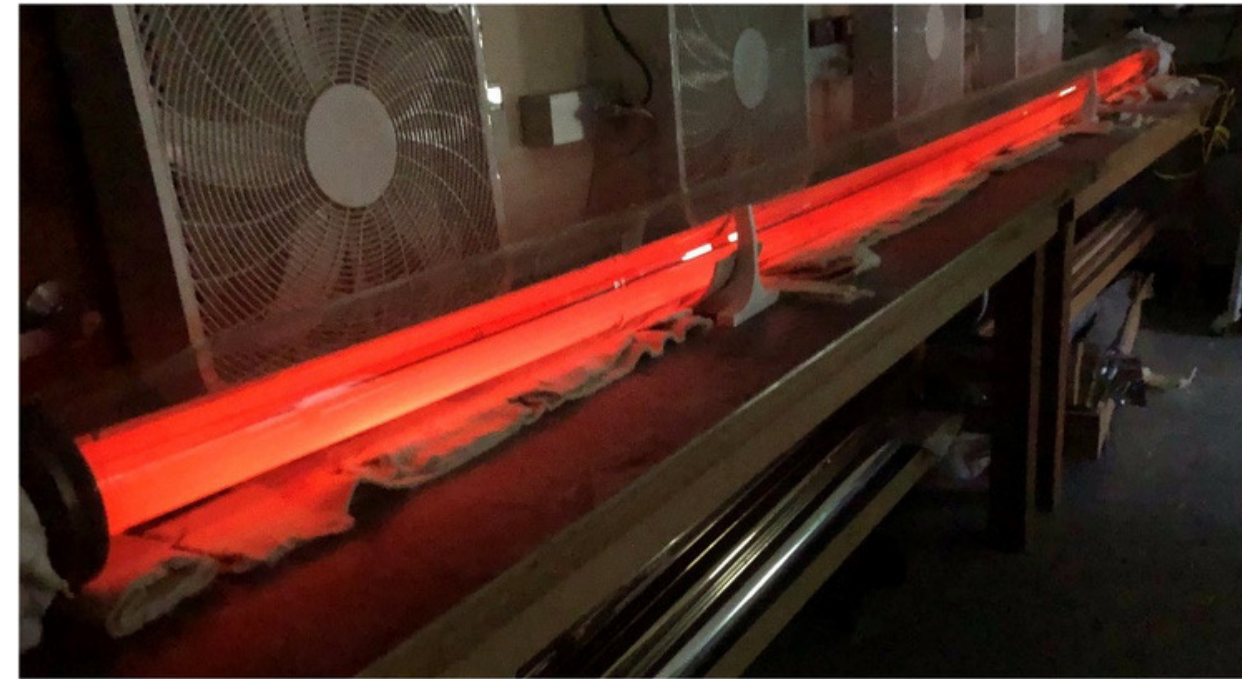

UC Merced faculty have invented Solar collectors, designed differently with various desired performances for application in solar energy generation. A Solar thermal collector is designed to collect heat by absorbing sunlight. A Solar electric generation system is designed to generate electricity.



Through collaboration with utilities, industry, and other stakeholders, UC Solar researchers are tasked with creating solar technologies that can be brought to the marketplace quickly and integrated seamlessly. UC Solar partners with industry participants through the UC Solar Industry Consortium, which attracts companies that design, produce, implement, manage, and invest in solar technologies.

Advanced Solar Technologies Institute (UC Solar)

UC Merced

Technology Type	Technology Capabilities
Energy Efficiency	<ul style="list-style-type: none">• Efficiency characterization up to 250C
Energy Efficiency	<ul style="list-style-type: none">• Heat loss measurement up to 650C
Energy Efficiency	<ul style="list-style-type: none">• Outdoor I-V data collection for PV module performance evaluation



Solar Test Field UC Merced

- Automated I-V curve tracing for individual PV modules
- Measurement and modeling of module operating temperature
- Data analysis and evaluation



Electric Drive Vehicle Testing Laboratories


UC Riverside

Address

CE-CERT
1084 Columbia Ave.
Riverside, CA 92507

Point of Contact

Kent Johnson
P: 951-827-8515
E: kjohnson@cert.ucr.edu



UC Riverside's Bourns College of Engineering–Center for Environmental Research and Technology (CE-CERT) has unique capabilities to test a variety of electric drive vehicles, including pure battery electric, fuel-cell, hybrid electric, and plug-in hybrid electric vehicles. With two state-of-the-art chassis dynamometers, both light-duty and heavy-duty EVs can be tested. CE-CERT has developed a wide range of electric drive testing protocols, providing research results to industry, government agencies, and academia.




Electric Drive Vehicle Testing Laboratories

UC Riverside




Dynamometer Systems capable of testing a wide range of electric-drive vehicles

CE-CERT's dynamometers have been designed to handle a range of vehicles and vehicle loads at on-road driving conditions. The Heavy-Duty 48" Electric AC Chassis Dynamometer has dual, direct connected, 300 horsepower motors attached to each roll set with a base inertia of 45,000 lbs. with the addition of a large flywheel. The dynamometer applies appropriate loads to a vehicle to simulate factors such as the friction of the roadway and wind resistance that it would experience under typical driving. A driver accelerates and decelerates following a driving trace while the vehicle is driven in place.

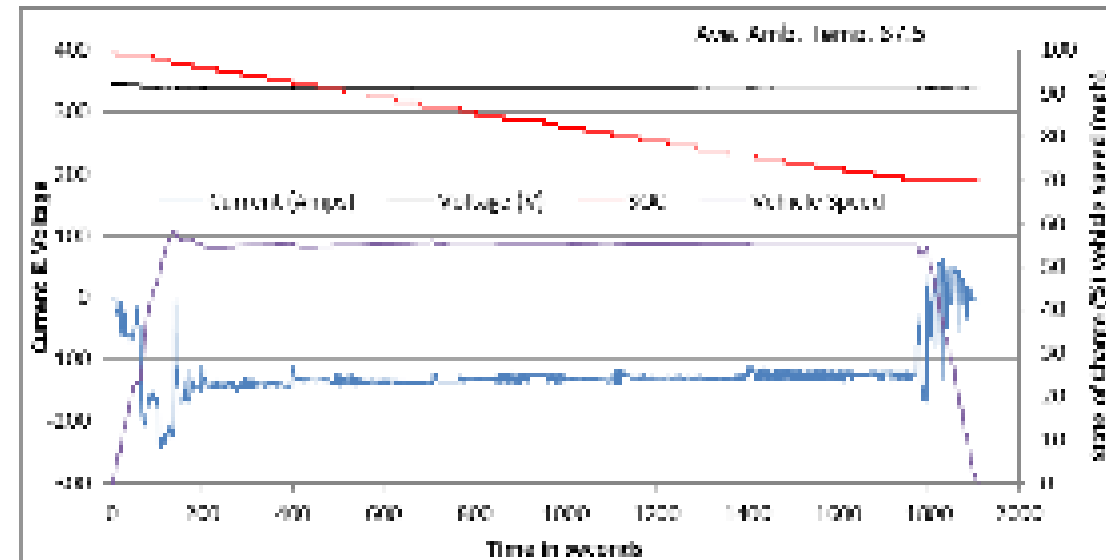

Working with CARB and the California Energy Commission, CE-ECRT has developed and utilizes specific testing protocols for EVs

In addition to standard vehicle performance measurements of velocity and acceleration, CE-CERT is able to measure battery SOC, system voltage and current, energy efficiency per mile (kWh/mile) and gradeability.

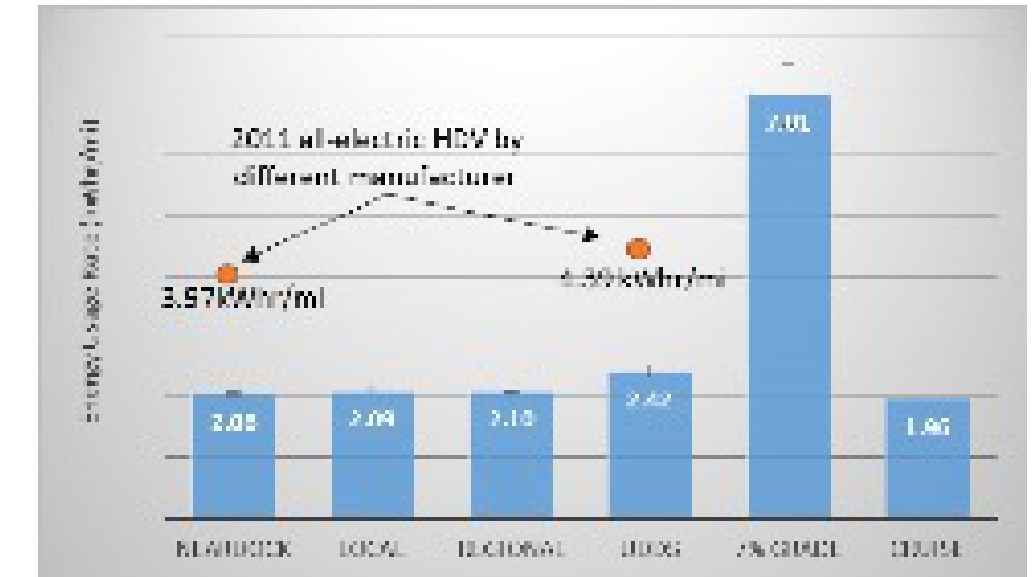

Electric Vehicle Drive Cycle Testing

Through extensive vehicle activity studies, CE-CERT has developed a number of "drive cycles" specific for electric vehicles and trucks. These drive cycles, in addition to certification drive cycles, can be tested repeatedly in a controlled environment.

Electric Drive Vehicle Testing Laboratories

UC Riverside

Technology Type	
Transportation	<ul style="list-style-type: none">• Heavy Duty Chassis Dynamometer: Capable of testing any electric truck in a wide range of configurations.
Transportation	<ul style="list-style-type: none">• Light Duty Chassis Dynamometer: Capable of testing any light-duty electric vehicle in a wide range of configurations.
Transportation	<ul style="list-style-type: none">• EV Data Acquisition System: Real-Time Monitoring System Software and Sensors: Capable of measuring dynamometer physical loads, battery SOC, vehicle voltage, current, energy efficiency.

Sustainable Integrated Grid Initiative (SIGI) Testbed


UC Riverside

Address

CE-CERT
1084 Columbia Ave.
Riverside, CA 92507

Point of Contact


Michael Todd
P: 951-827-8560
E: mike@cert.ucr.edu



UCR has well established microgrid testbeds and laboratories for pre-commercial testing in a "living lab" environment. Over the last seven years, UCR researchers have designed and implemented numerous microgrid systems including 2.2 MWh of battery energy storage, over 11 MW solar PV, 8 MW of Thermal Energy Storage (TES) for chiller operations, and multiple electric vehicle chargers including supervisory control and data acquisition systems.



These unique microgrid/smartgrid testbeds with plug and play capabilities possess the ability to validate various Hardware in Loop (HiL) scenarios. In addition to energy system modeling, UCR can utilize its microgrid testbed for evaluating specific microgrid components, software, operational strategies, and technologies within a closely monitored setting.

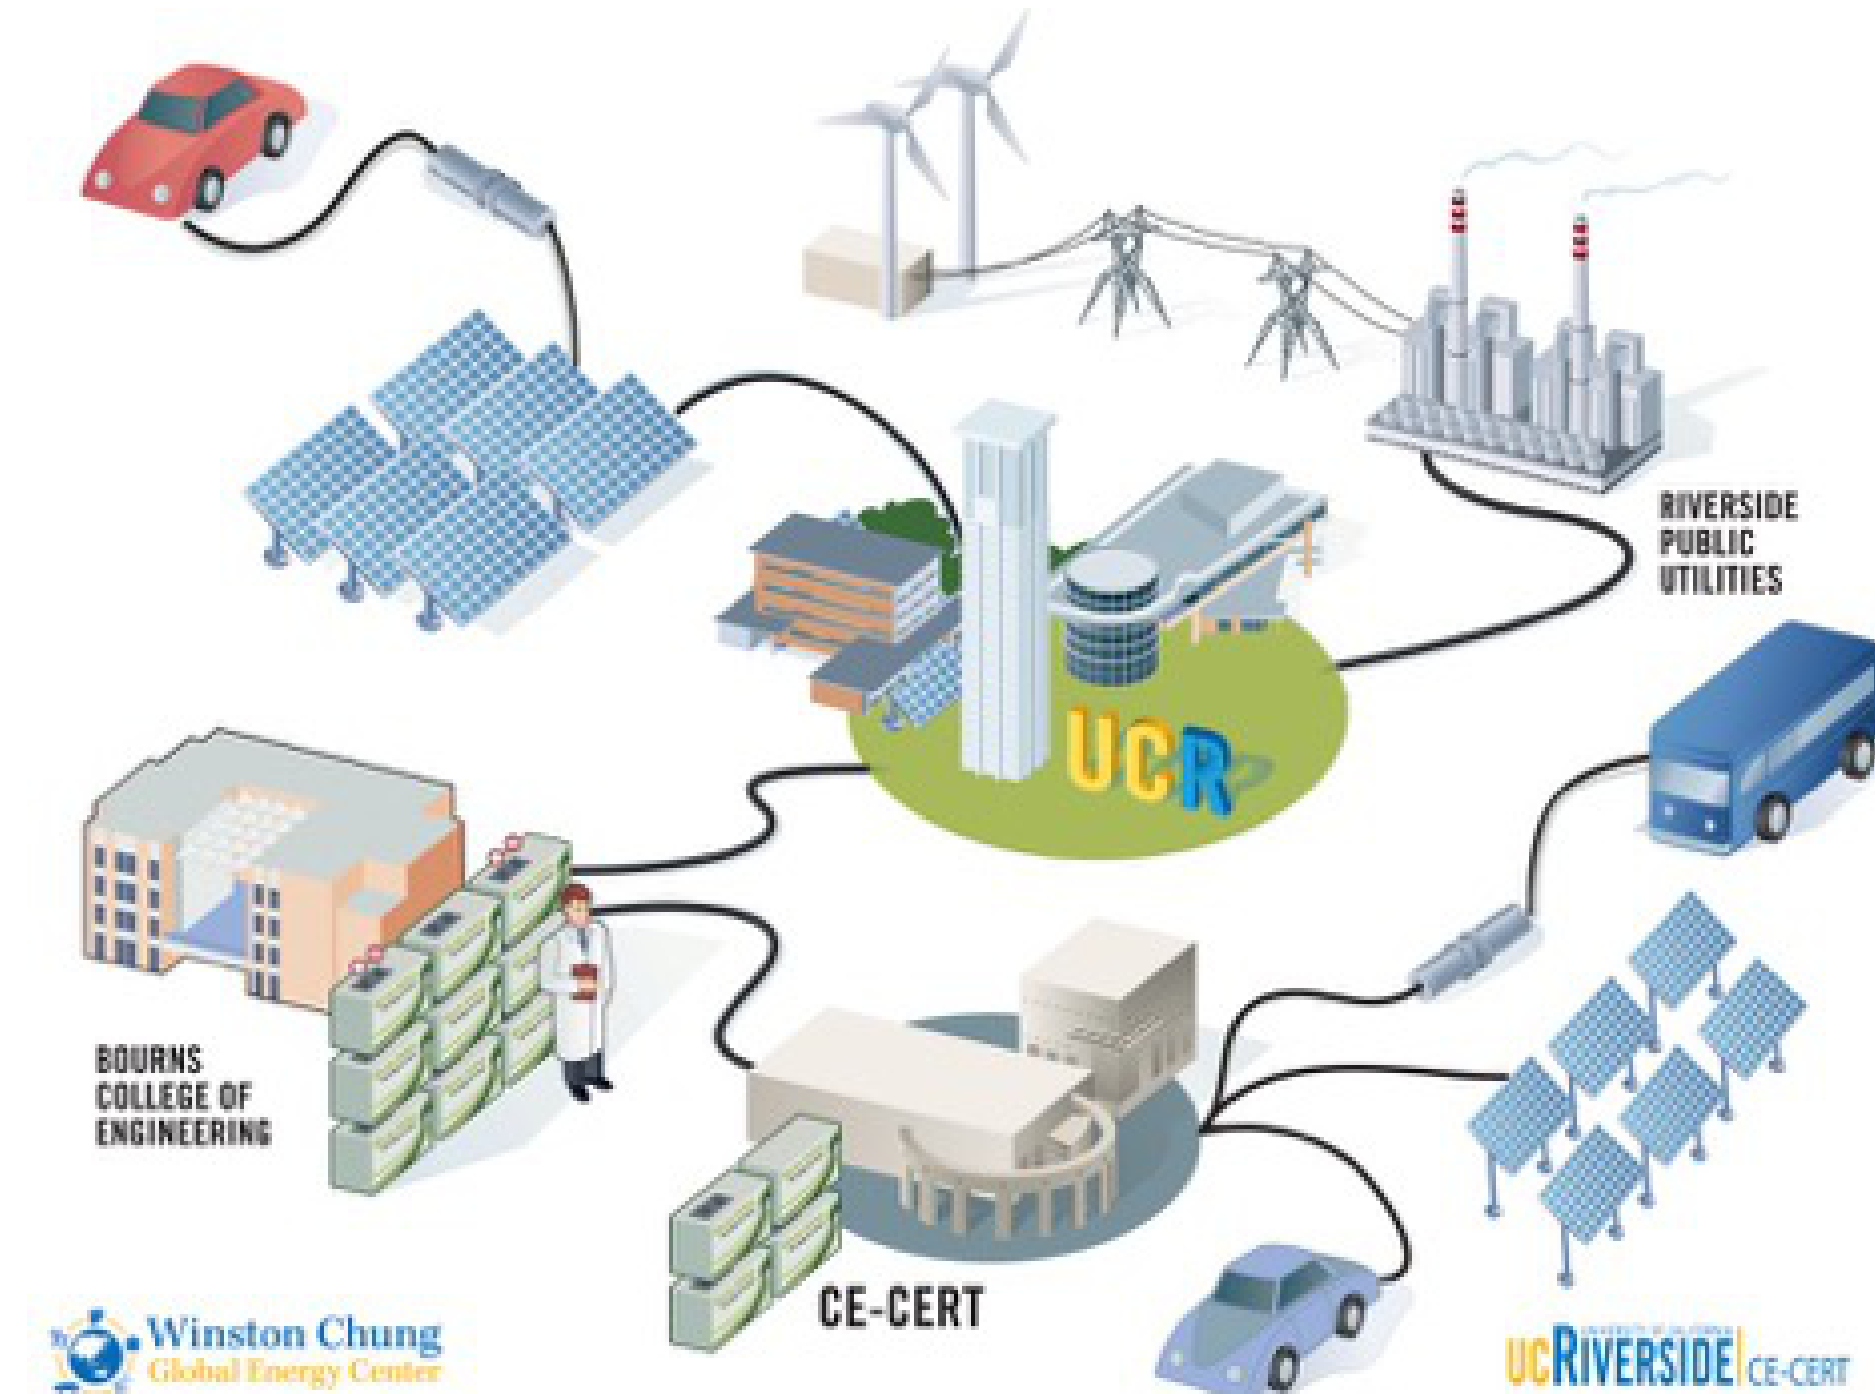

Sustainable Integrated Grid Initiative (SIGI) Testbed

UC Riverside




Battery Storage

- 2 MWh integrated battery energy storage
- Mobile battery platform energy optimization
- Mobile battery storage and EVSE integration
- Load shifting and peak shaving algorithm optimization
- Demand response



Renewable Energy Generation

- 13 MW of PV solar capacity islanding operation and control
- Curtailment optimization & Soiling evaluation
- Fixed vs. tracking characterization
- Zero net energy microgrid demonstration with storage and load control integration

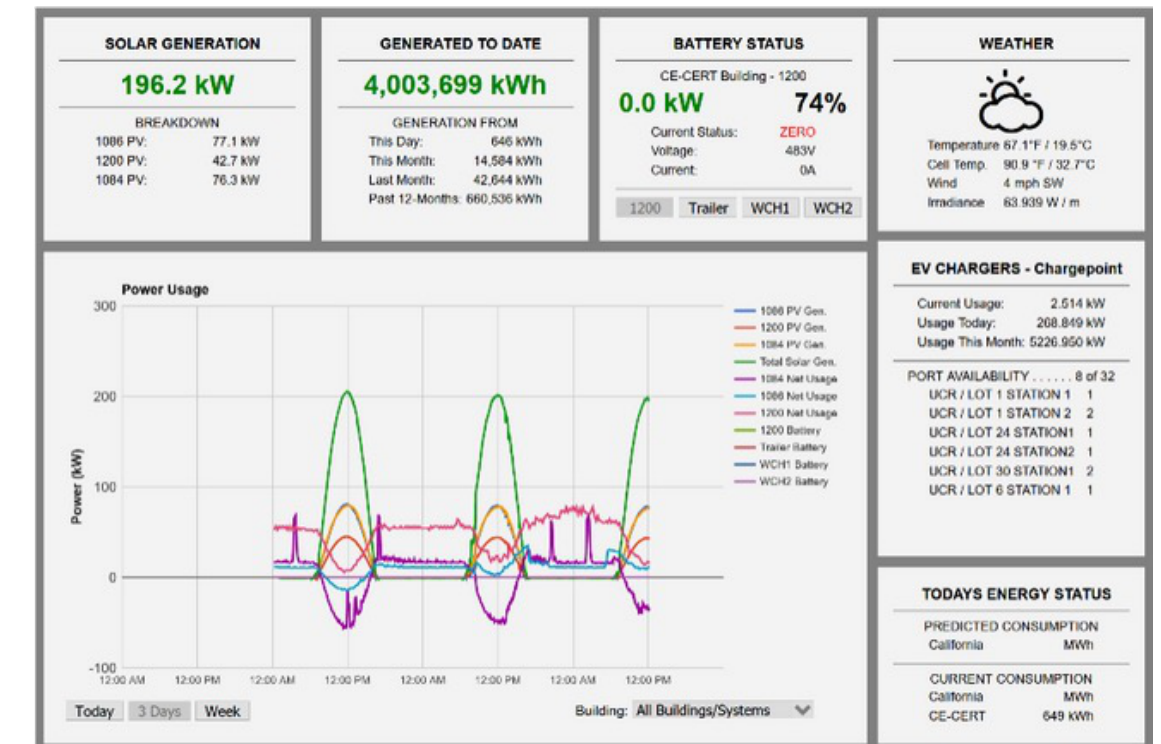

System Integration

- SCADA microgrid controller development
- Power quality monitoring and analysis with load monitoring and control
- Microgrid optimization
- EV charging with microgrid integration
- Anomaly detection and response

Distributed Energy Resources Laboratory (DERL)


UC Riverside

Address

CE-CERT
1084 Columbia Ave.
Riverside, CA 92507

Point of Contact

Alfredo Martinez-Morales
P: 951-827-8578
E: alfmart@cert.ucr.edu



The Distributed Energy Resources Laboratory (DERL) is focused on applied research related to the design, integration, deployment, demonstration and validation of renewable energy, green infrastructure, and new clean technologies.




Testbeds are designed for testing new technologies and products in a safe and practical manner by integrating monitoring & communication devices, data loggers, smart controllers, and software in a multi-platform environment that simulates real-world conditions for the detailed analysis and demonstration of use cases and the assessment of benefits.




Distributed Energy Resources Laboratory (DERL)

UC Riverside

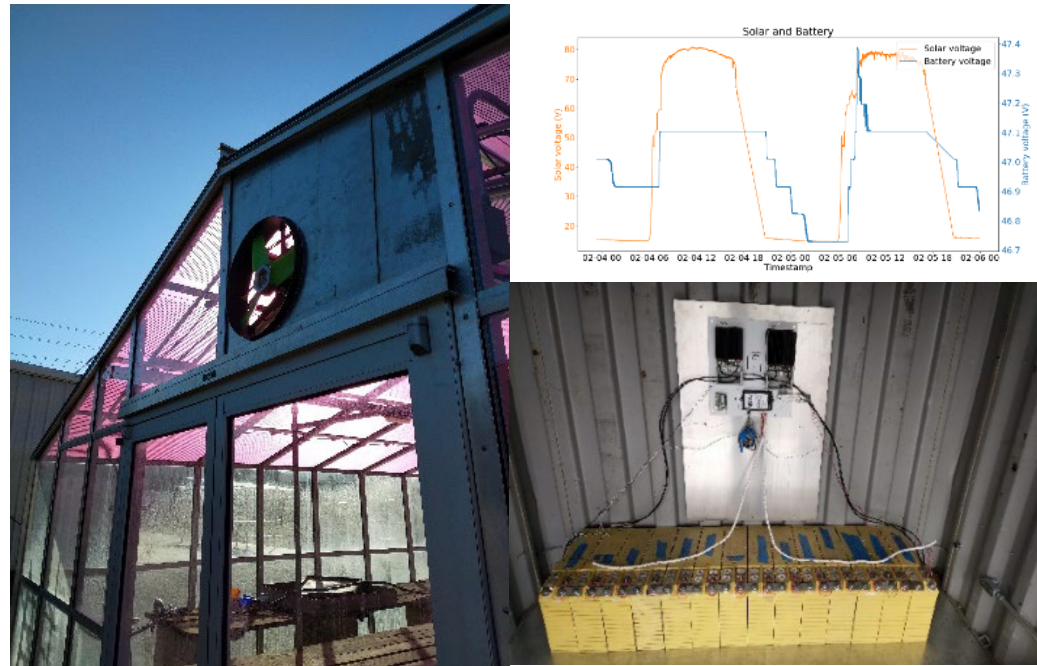


Off-Grid Solar Energy Systems

- Stand-alone (off-grid) system deployment, demonstration, and measurements
- Testing of control algorithms for managing self consumption, loads, and energy storage
- Greenhouse energy management systems (load controller, charge controller, microcontrollers, and battery management systems)

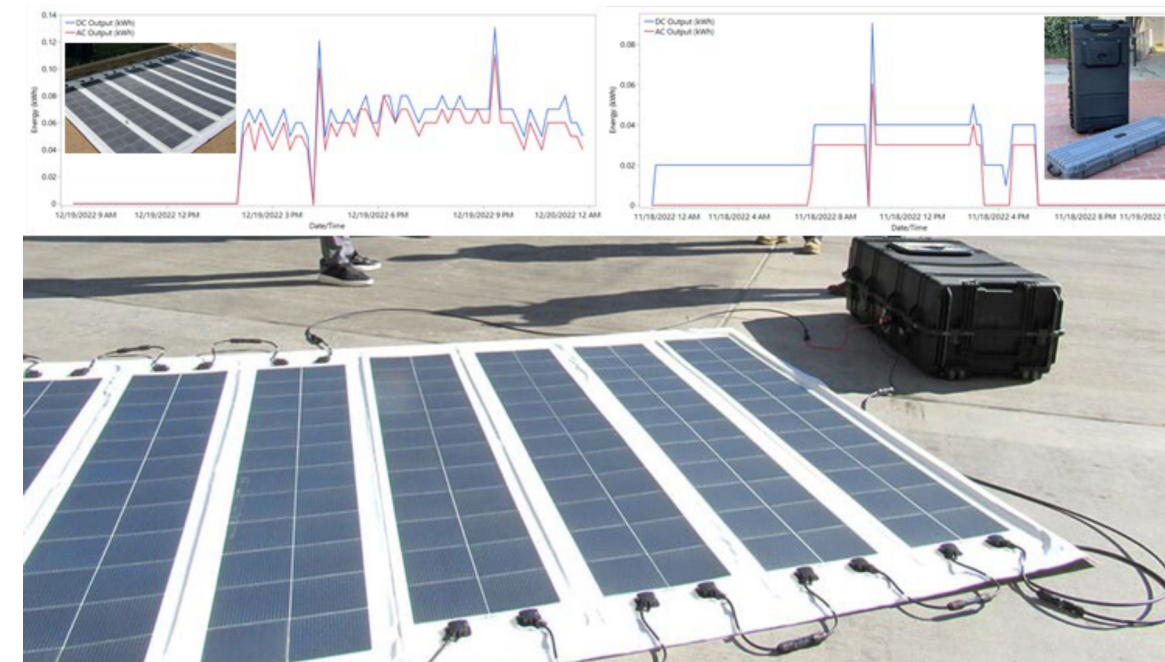

Mobile Renewable Energy Power Systems

- Modular and deployable solar-plus-battery system demonstration and testing
- Portable battery performance cycling and testing
- Solar energy generation, inverter, and load data monitoring, reporting, and analysis
- Versatile and adaptable testbed system

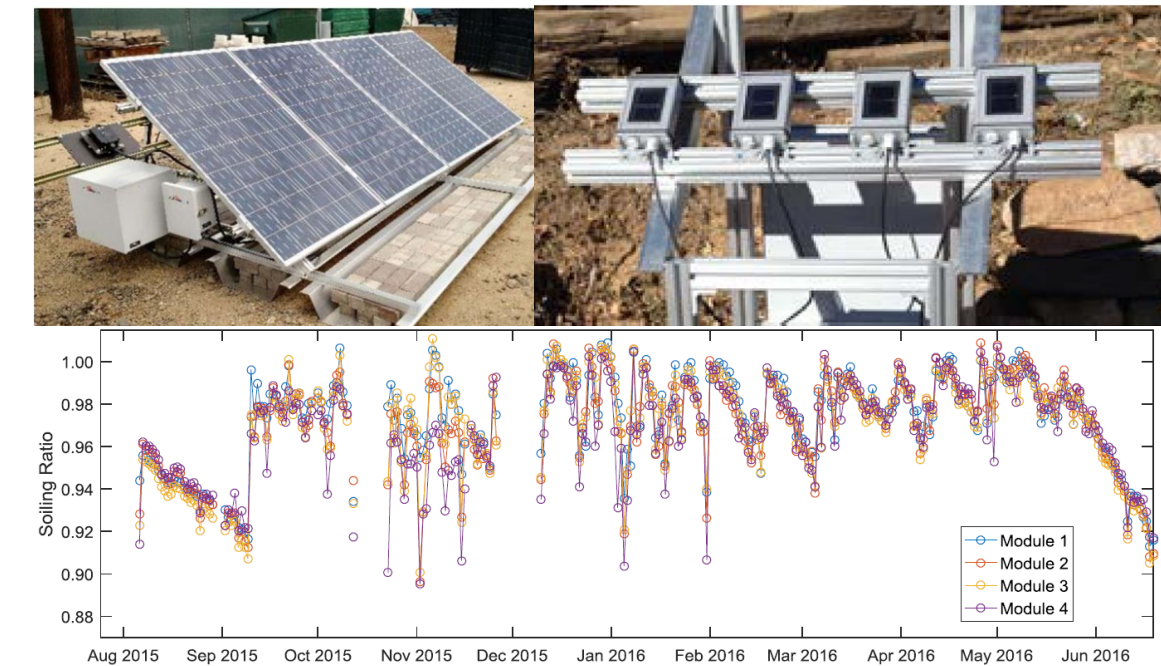


Soiling Testing Stations

- Testbed for testing different module types, coatings, designs, and cleaning cycles
- Soiling, light induce degradation (LID) studies, and potential induced degradation (PID)
- Performance metrology and environmental equipment
- Data collection and analysis methodologies

Distributed Energy Resources Laboratory (DERL)

UC Riverside

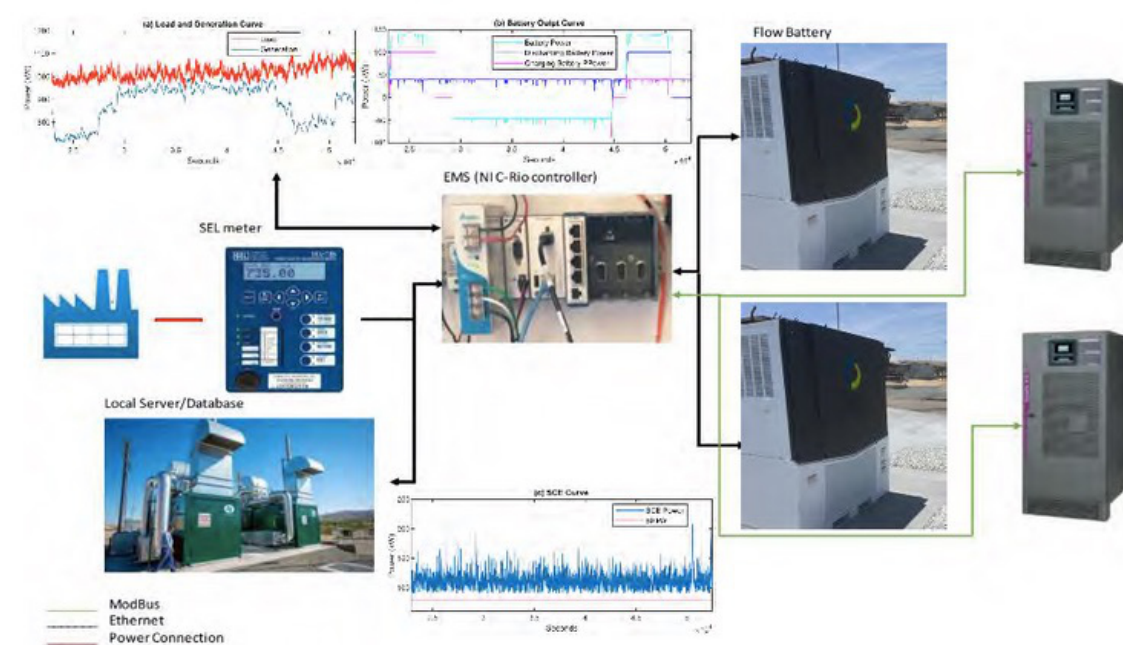


Long-Duration Energy Storage

- Large scale integration of flow batteries
- Real time load forecast and dynamic control
- Energy management system and control algorithm development
- Benefit-to-cost analysis
- Lifecycle analysis



Flow Batteries Integration

- Rule 21 and NFPA compliance
- Demonstration of peak shaving, load shifting, demand response, and emergency back-up power
- Energy, economic, and emissions savings analysis
- System optimization based on operational constraints and requirements

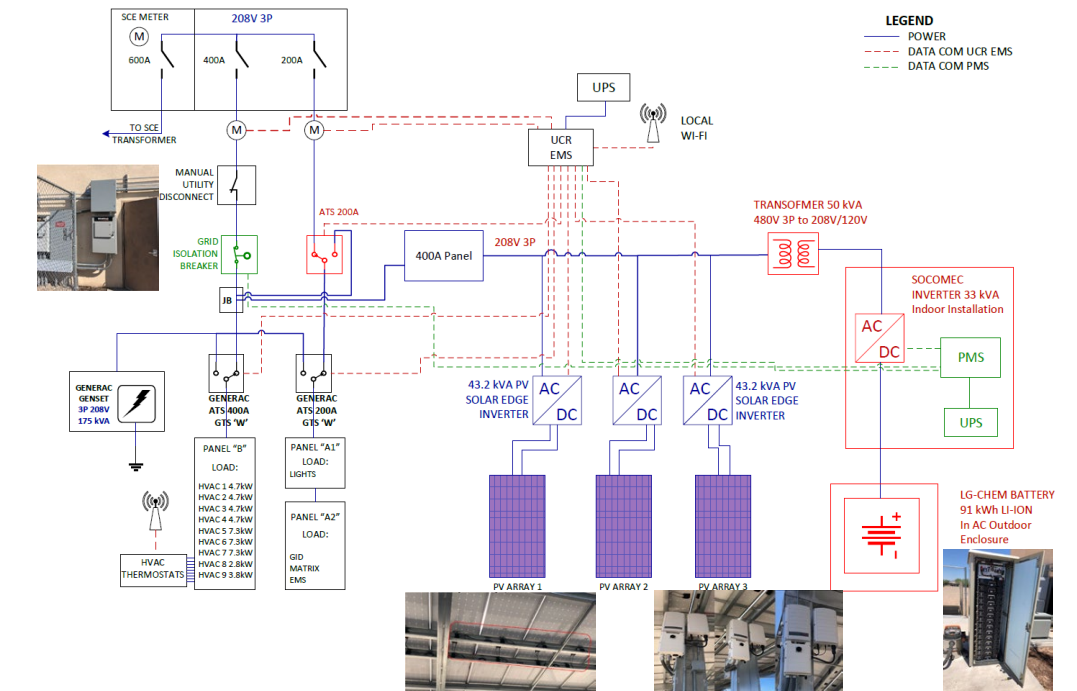

Microgrids

- Islanding studies and demonstration increased grid stability, robustness, and reliability
- Advanced data and energy management systems
- Optimized utilization of solar energy and stored energy
- Implementation of use cases and scenarios
- Measurement and verification (M&V) analysis

Sustainable Integrated Grid Initiative (SIGI) & DERL Testbeds

UC Riverside

Technology Type	Technology Capabilities
Energy Efficiency	<ul style="list-style-type: none">• Solar Panels: Soiling, efficiency, curtailment, performance, microgrid integration, islanding.
Energy Efficiency	<ul style="list-style-type: none">• Inverters: Efficiency testing (5kW to MW+), curtailment, islanding, voltage support, reactive power control, grid ancillary services.
Energy Storage	<ul style="list-style-type: none">• Battery Energy Storage: Microgrid integration, control optimization, Battery Management System (BMS), performance, islanding.
Grid Technologies	<ul style="list-style-type: none">• Microgrid Control and Integration: System architecture, net zero configuration, controls, distributed generation, load management.
Grid Technologies	<ul style="list-style-type: none">• Load Management: SCADA, islanding, microgrid integration, control optimization, energy profiling.
Grid Technologies	<ul style="list-style-type: none">• Supervisory Control and Data Acquisition (SCADA): System optimization, system configuration, energy measurement, load management, performance monitoring.
Grid Technologies	<ul style="list-style-type: none">• Vehicle to Grid: As of 2019, SIGI now offers testing of vehicle-to-grid algorithms using the latest V2G inverter systems.

Field Testing and HiL Testing of Smart Grid Monitoring and Control Technologies

UC Riverside

Address

ECE Department
900 University Ave.
Riverside, CA 92507

Point of Contact

Hamed Mohsenian-Rad
P: 951-827-2387
E: hamed@ece.ucr.edu



UC Riverside's Department of Electrical and Computer Engineering, in collaboration with Winston Chung Global Energy Center (WCGEC) and the Bourns College of Engineering–Center for Environmental Research and Technology (CE-CERT) has the unique capabilities to test various smart grid sensor technologies (e.g., synchrophasors, synchrowaveforms, grid asset sensors, line sensors, substation SCADA systems, behind-the-meter sensors, building sensors, fault location, isolation, and service restoration (FLISR), etc.); as well as various smart grid control technologies (e.g., Volt-VAR control and Volt-Watt control based on inverter-based distributed energy resources (DERs), voltage and frequency ride-through control, DERMS, Advanced Distribution and Management Systems (ADMS), distribution-level Flexible Alternating Current Transmission System (FACTS), building energy management, frequency regulation, demand response, etc.). The available field test capability is at medium voltage and low voltage three-phase systems; including a collection of multiple 12 kV power distribution feeders; with various types of loads and DERs.


In addition to true-scale field testing capabilities, UC Riverside also has the capabilities to conduct lab-scale (i.e., pre-field-test) assessment of smart grid monitoring and control technologies by using its state-of-the-art hardware-in-the-loop (HIL) testing facility; including both performance and cyber-security assessment.

Field Testing and HiL Testing of Smart Grid Monitoring and Control Technologies


UC Riverside




GPS-time-synchronized High-resolution Phasor Measurements (PSL Micro-PMUs)

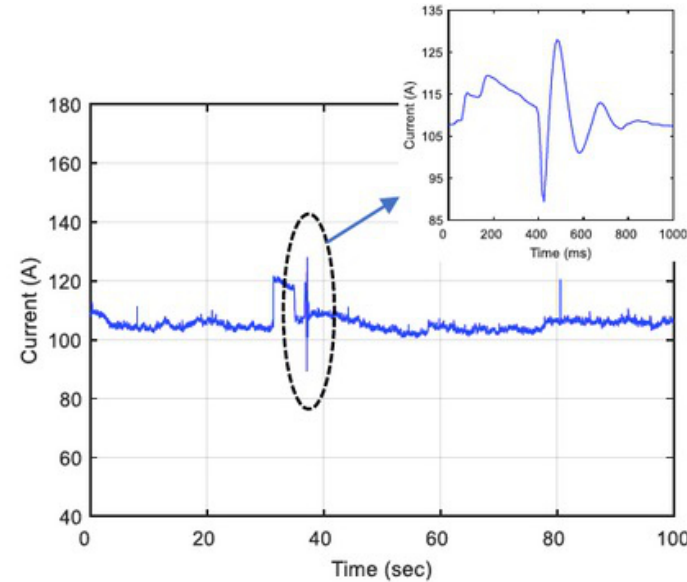


Non-contact Line-Mounted Current Sensors and Fault Indicators (Sentient Line Current Sensors)

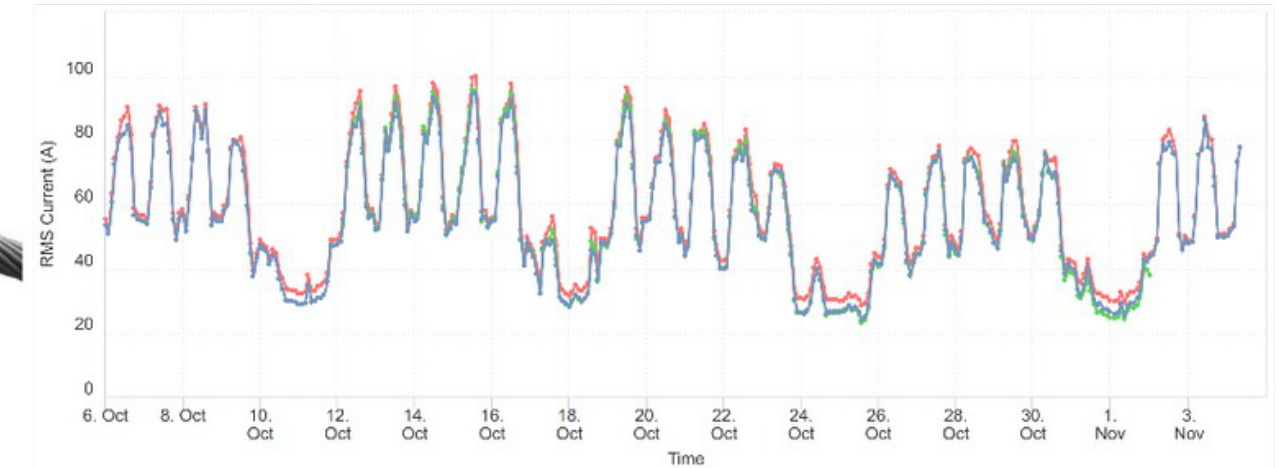

Big-data Analytics

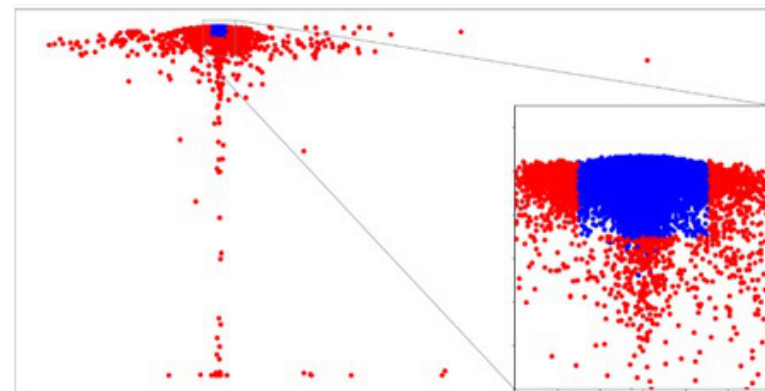

Non-contact Line-Mounted Current Sensors and Fault Indicators (Sentient Line Current Sensors)

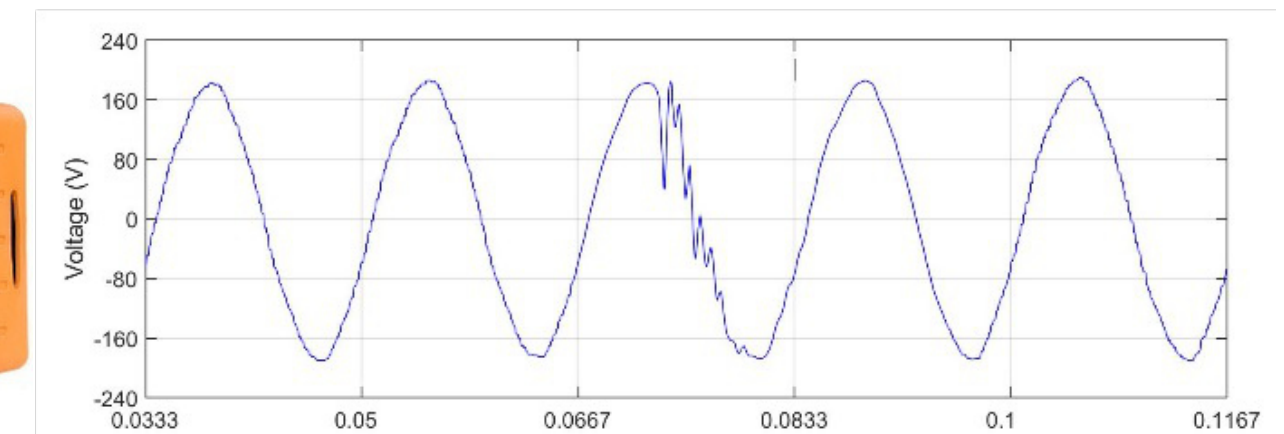


Field Testing and HiL Testing of Smart Grid Monitoring and Control Technologies

UC Riverside



DERMS: DER Management System (SGS DER Controller);
supporting inverter-based Volt-VAR and Volt-Watt control

Lab-scale Hardware-in-the-Loop (HiL) testbed with a Real-Time
Digital Simulator (RTDS) for Power Grid Simulation

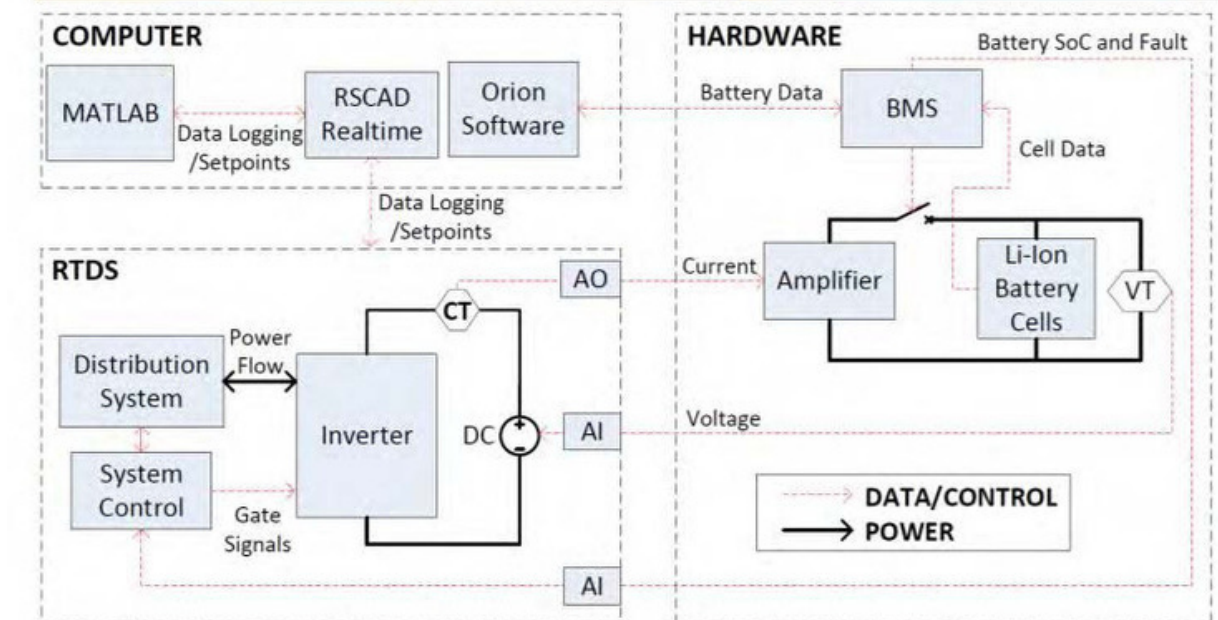

Real-Time Control of Inverter Interfaced Distributed Energy Resources


UC Riverside

Address

UCR WCGEC
1084 Colombia Avenue
Riverside, CA 92507


Point of Contact

Hamid Nazaripouya
E: hamidn@ucr.edu



Power Grid Modernization Lab (PGML) at UCR has a unique expertise on modeling, control, and integration of inverter-interfaced distributed energy resources (DERs) at behind-the-meter. The team has developed, implemented, and demonstrated several applications of DERs in supporting as well as forming the grid. The applications include but not limited to intermittency compensation, uncertainty mitigation, voltage regulation, frequency support, self-stabilization capability, and fault ride-through capability.

PGML benefits from a lab-scale testbed infrastructure including solar PV panels, battery storage, wind turbine, smart grid technologies, power electronic devices, smart meter data, and measurement/monitoring/control tools.

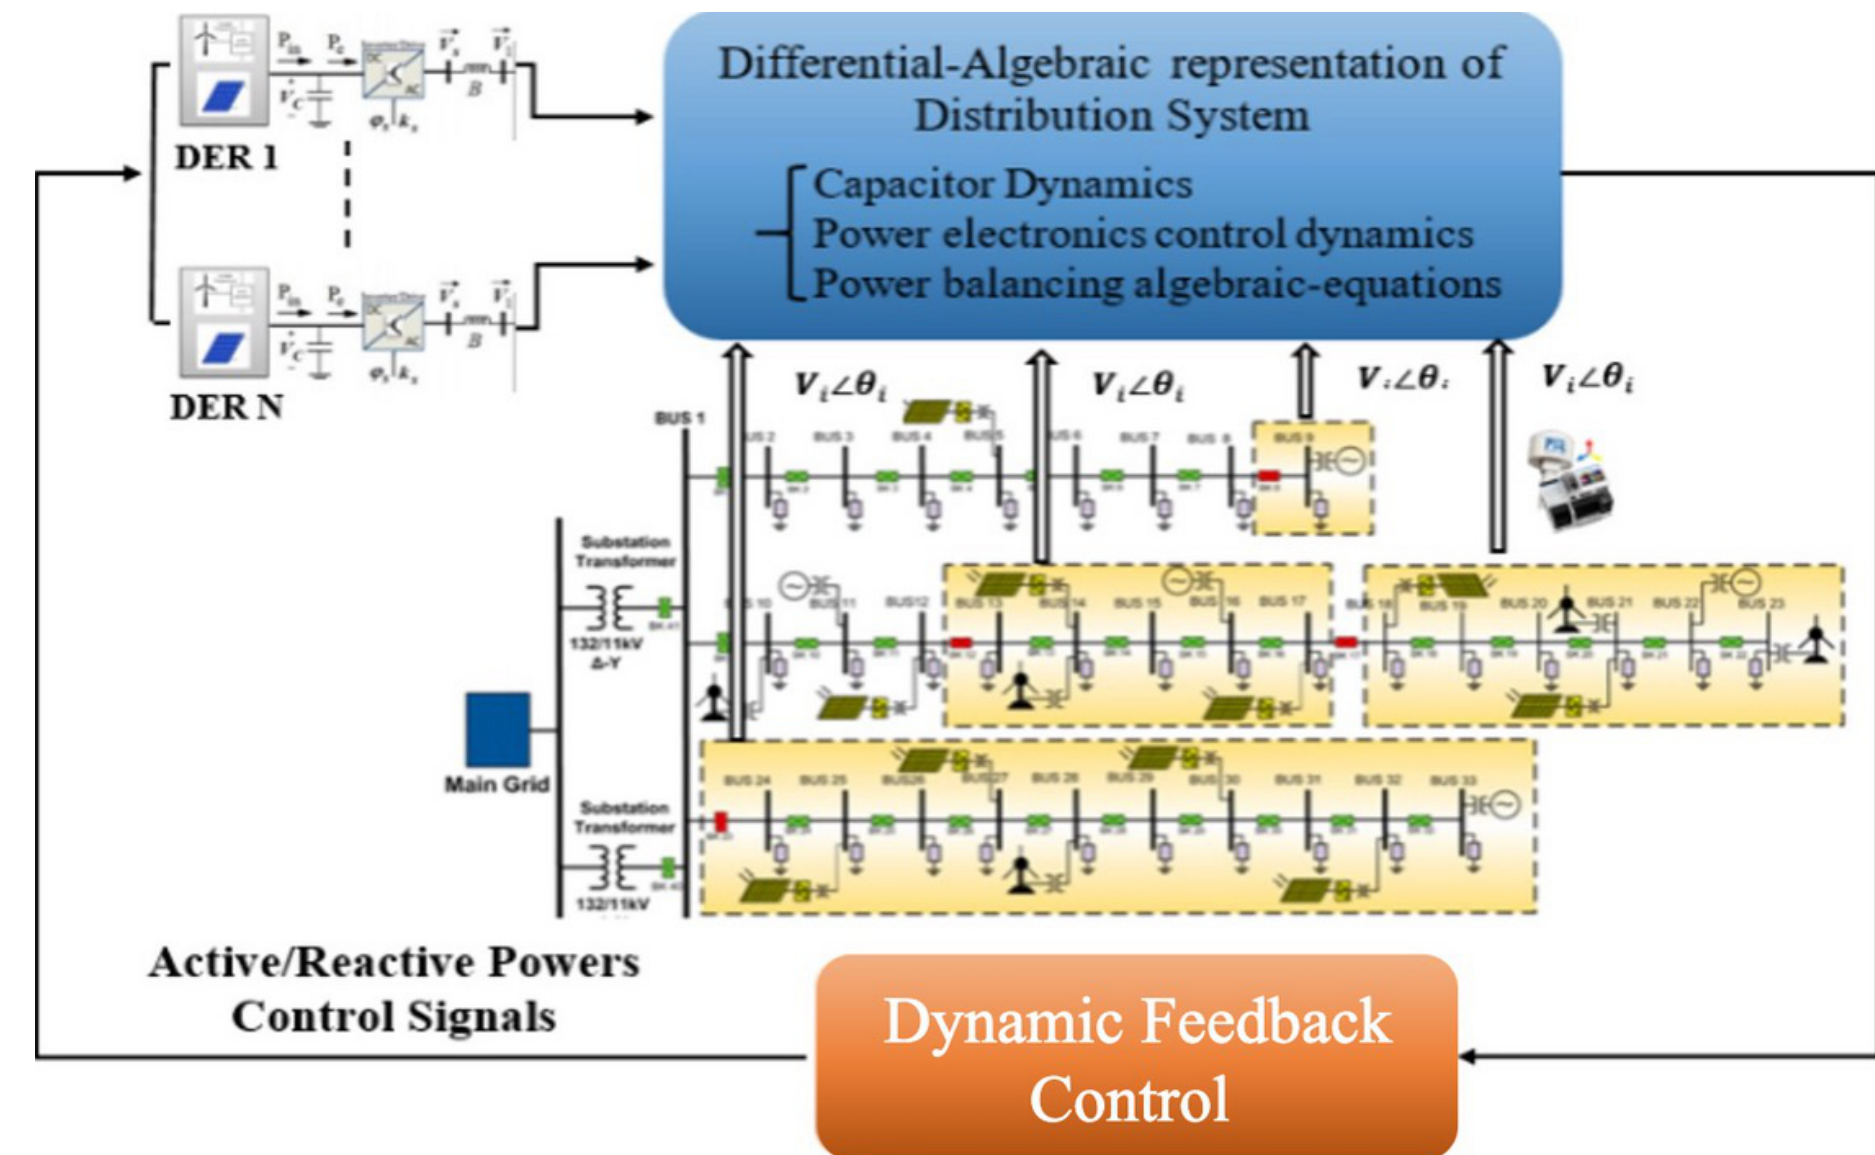


Real-Time Control of Inverter Interfaced Distributed Energy Resources

UC Riverside


Intermittency Compensation and Uncertainty Mitigation

EV Charger Only (No Battery)

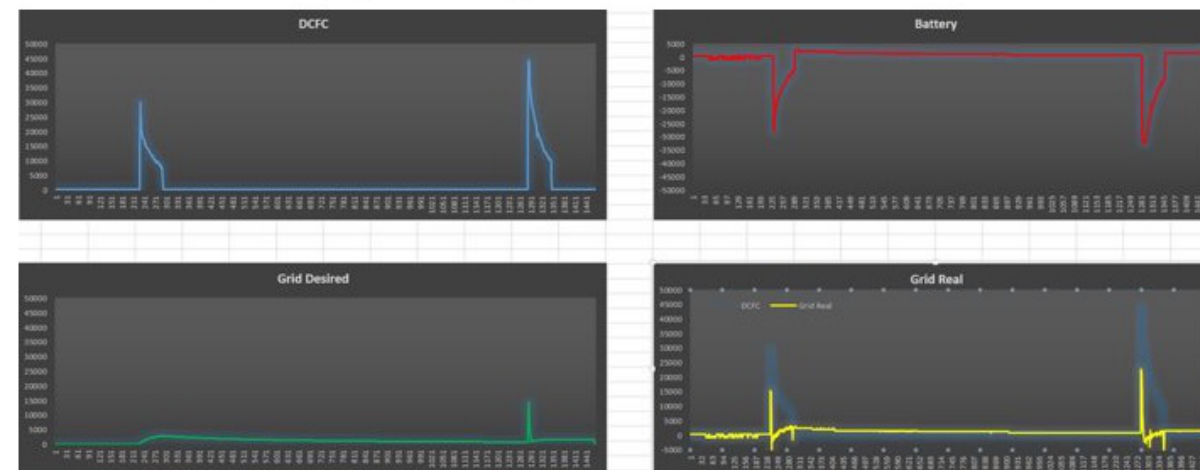

EV charger Plus Battery

Solar Only (No Battery)

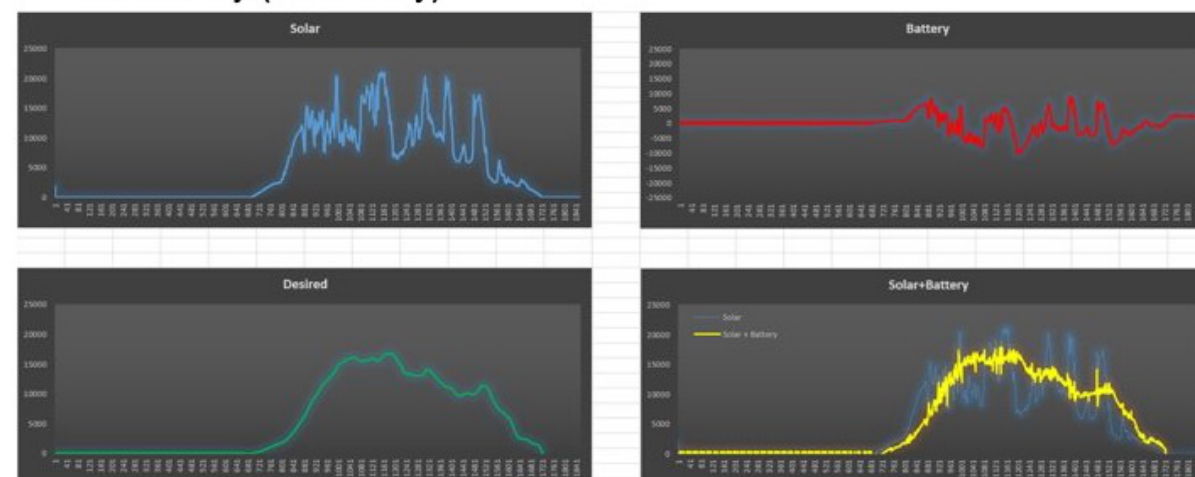





Solar Plus Battery



Real-Time Control of Inverter Interfaced Distributed Energy Resources

UC Riverside

Model-Free Optimal Control for Voltage Regulation

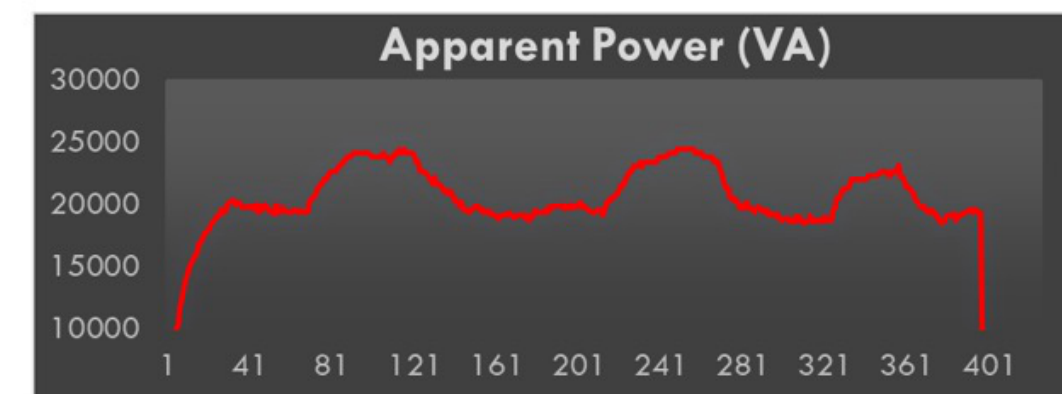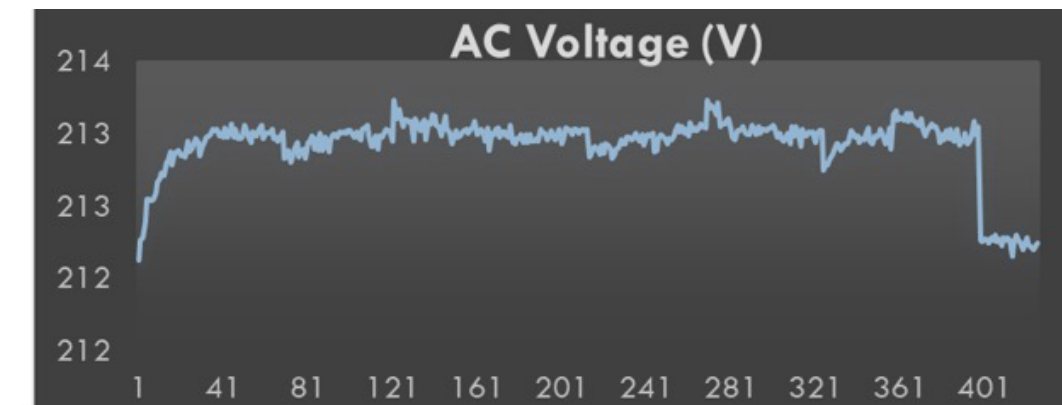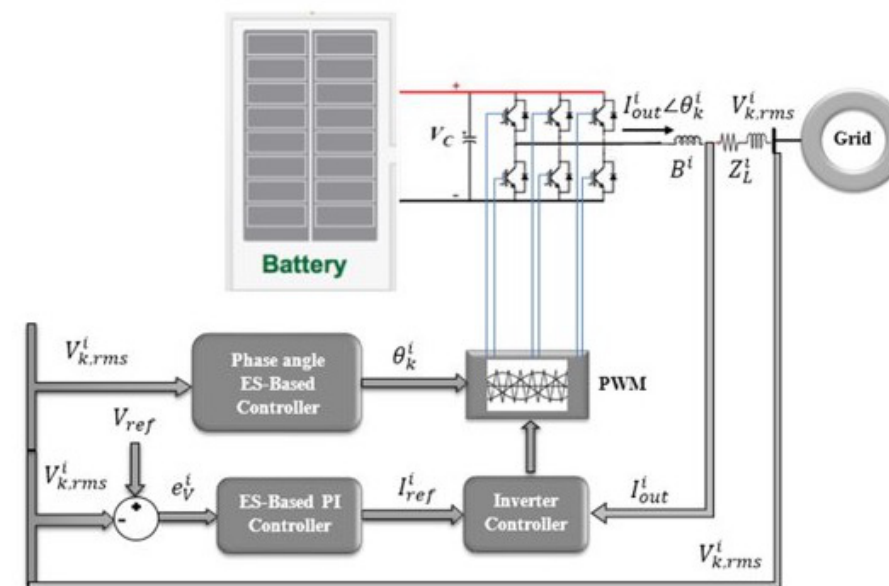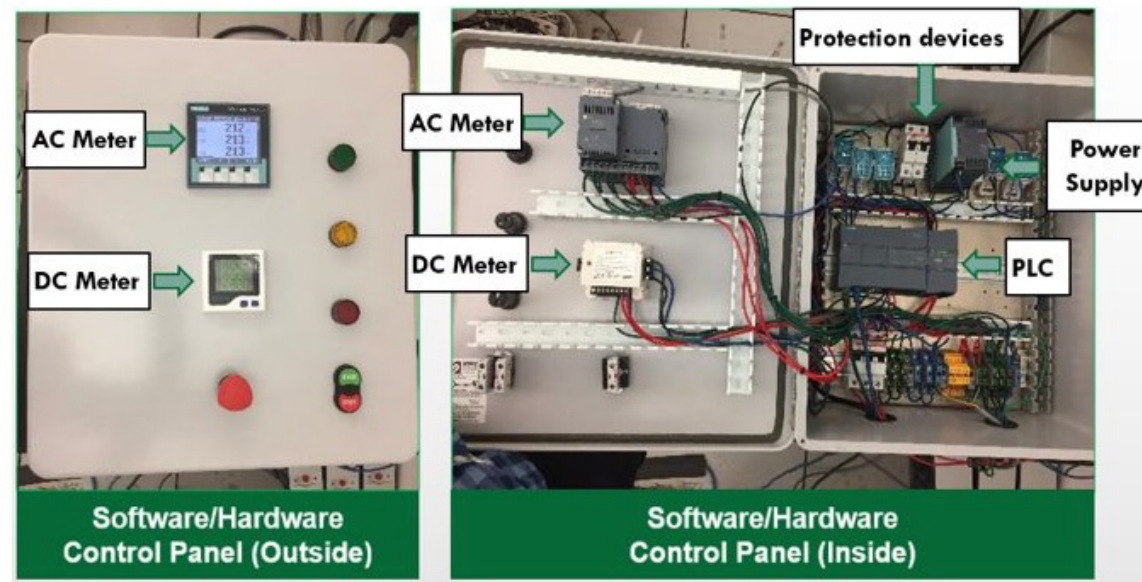


20 percent reduction in the inverter capacity for regulating the voltage

Real-Time Control of Inverter Interfaced Distributed Energy Resources




UC Riverside

Wind Power Intermittency Compensation

□ Considering the Energy Conversion Loss in Power Smoothing

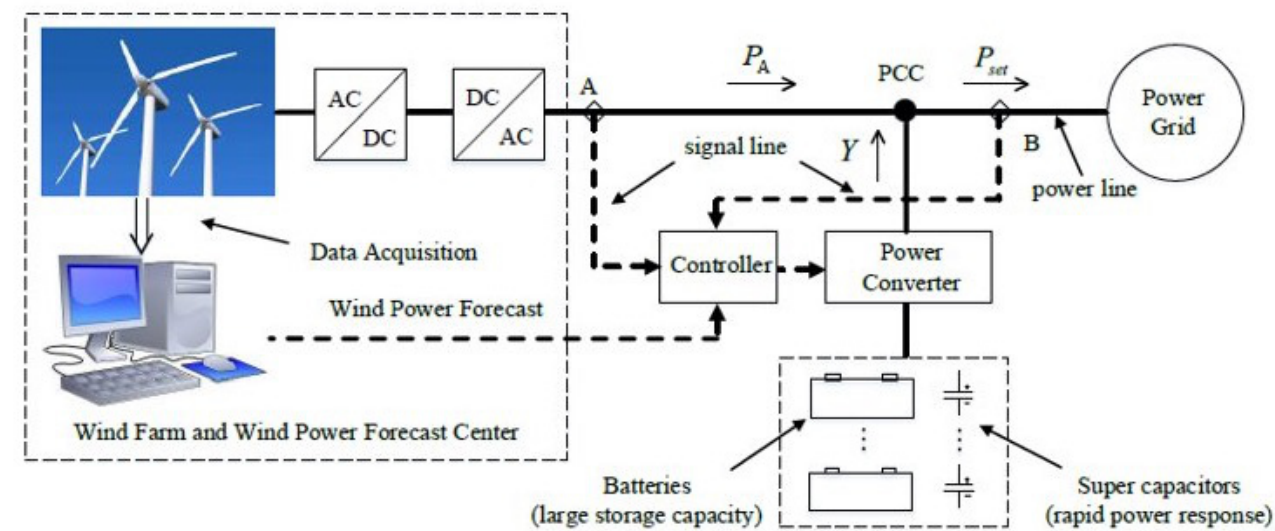



□ Managing SOC

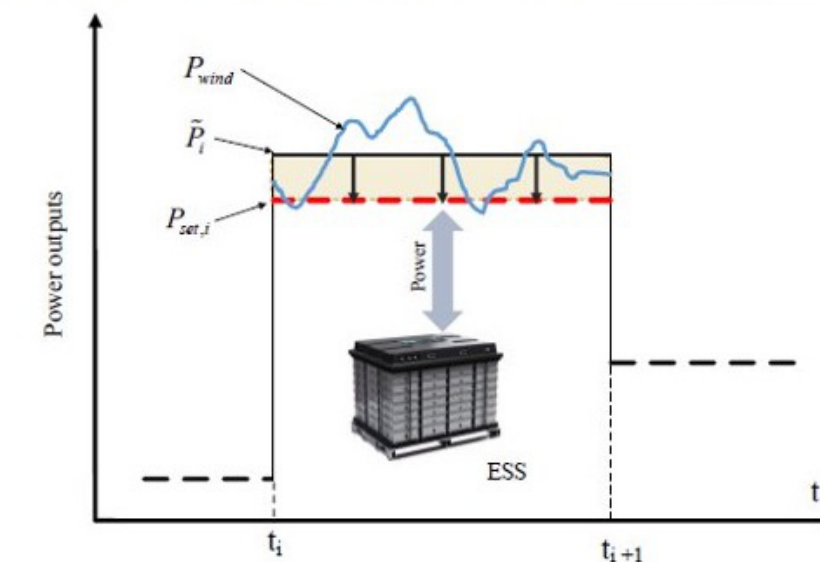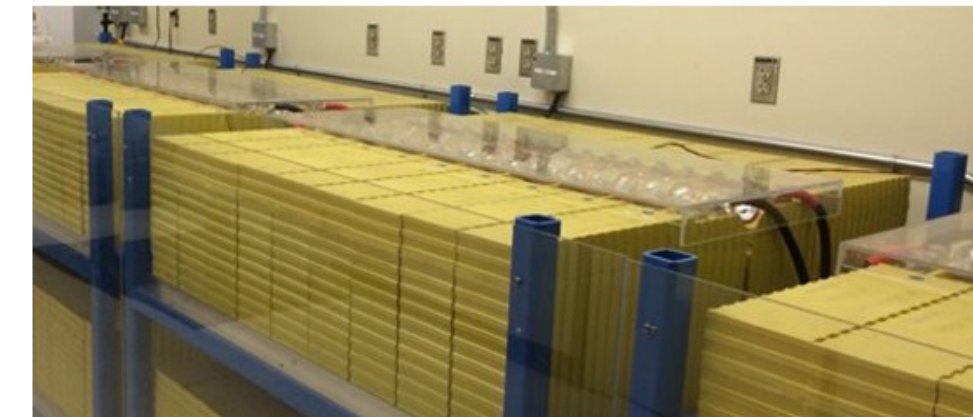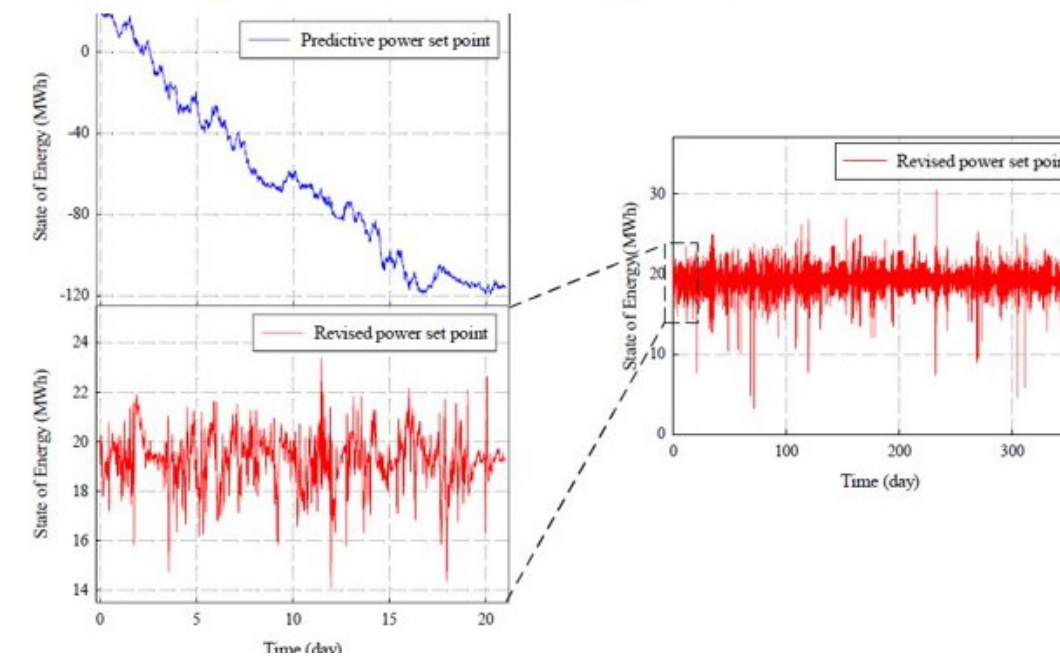



Real-Time Control of Inverter Interfaced Distributed Energy Resources

UC Riverside

Stable Solar-Powered Microgrid Testbed for Remote Applications

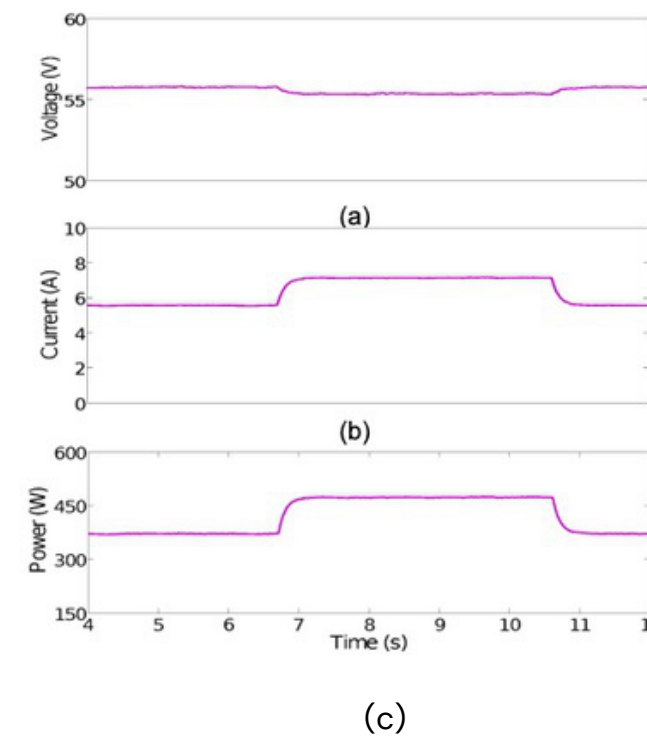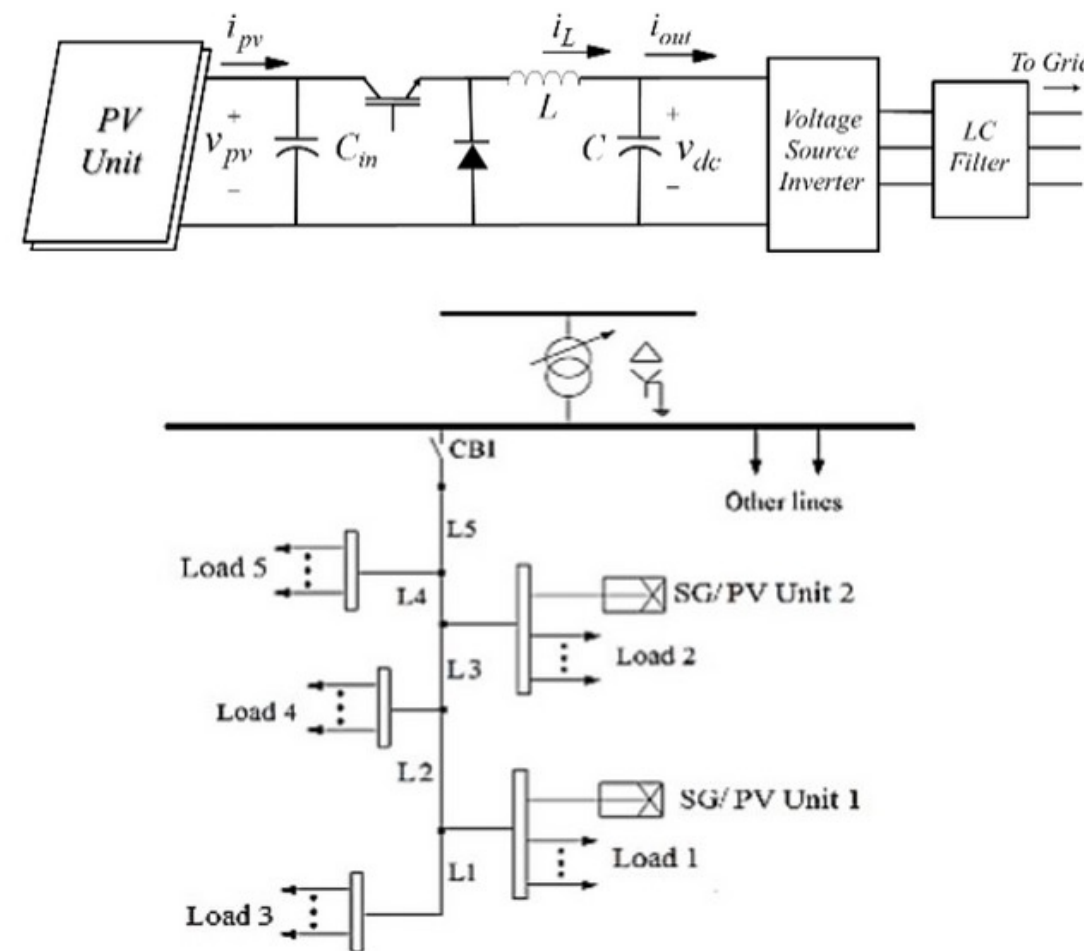

Hardware test- DG#1 performance during load change: a) Dc link voltage, b) dc-dc converter inductor current, and c) DG output power

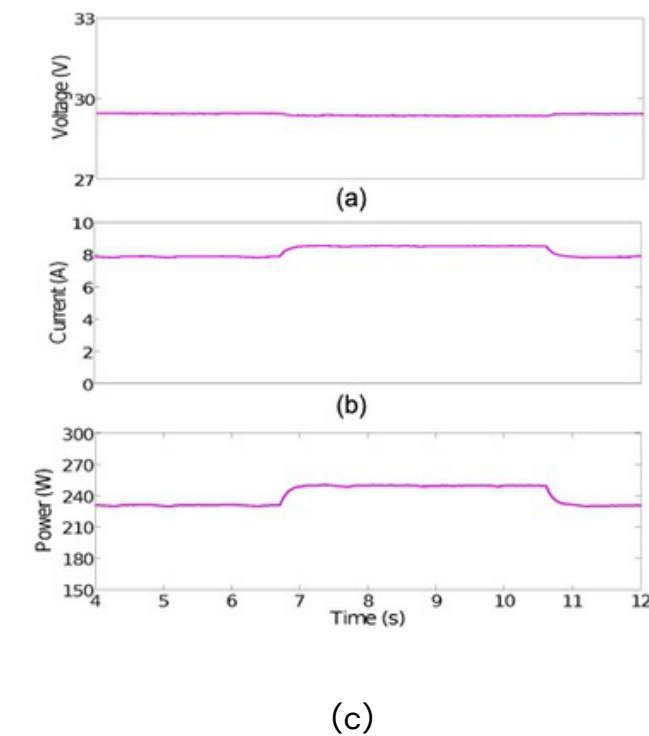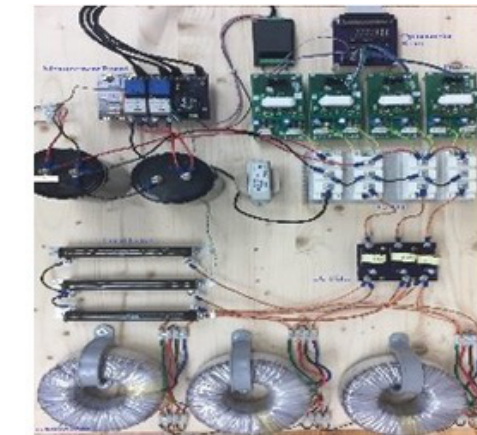

DG#2 performance during load change: a) Voltage at dc link, b) dc-dc converter inductor current, and c) DG output power

UC Riverside

The diagram illustrates the architecture of the OPAL-RT based microgrid testbench. It features a **Remote Controller** (containing a **User Interface** and **Master Controller**) connected via a **Comm. Switch** to an **Inverter Controller**. The **Inverter Controller** is linked to an **Inverter** block, which includes **Battery DC Input/output** and **DC Input** sections. A **PC for Distribution Grid Emulation** is connected to the **OPAL - RT (OP1420) Microgrid testbench**. The **OPAL - RT** is also connected to a **PHIL Simulator** and a **Power Distribution Panel**. A legend in the top right corner distinguishes between **Communication Flow** (green arrows) and **Power Flow** (red arrows). The power flow path starts from the **Power Distribution Panel**, goes through the **PHIL Simulator**, the **OPAL - RT**, the **Inverter**, and finally to the **Battery DC Input/output** section of the **Inverter Controller**. The communication flow path connects the **Remote Controller**, **Comm. Switch**, **Inverter Controller**, **OPAL - RT**, and **PHIL Simulator**.

Vehicle to Grid (V2G) Testing

UC Riverside

Address

CE-CERT
1084 Columbia Ave.
Riverside, CA 92507

Point of Contact

Michael Todd
P: 951-827-8560
E: mike@cert.ucr.edu



Vehicle to Grid (V2G) architectures allow grid connected vehicles to transfer power from the vehicle back to the electric supply infrastructure. The optimization of V2G requires properly configured vehicles and electric vehicle supply equipment (EVSE).



UC Riverside has created a microgrid testbed with integrated V2G capabilities. The system utilizes both light duty passenger EVs and larger transit vehicles.



Research is focused on system architectures, controls, optimization, energy management, and communications.



Shown in picture: Electric Vehicle supplying power to the storage bank (inside trailer) which is connected to the building microgrid


Vehicle to Grid (V2G) Testing

UC Riverside




Specialty Zero Emission Vehicle Platforms

- Equipped for bi-directional energy transfer
- Light duty and transit vehicle platforms
- 100 kW V2G capability
- Load shifting and peak shaving algorithm optimization
- Demand response

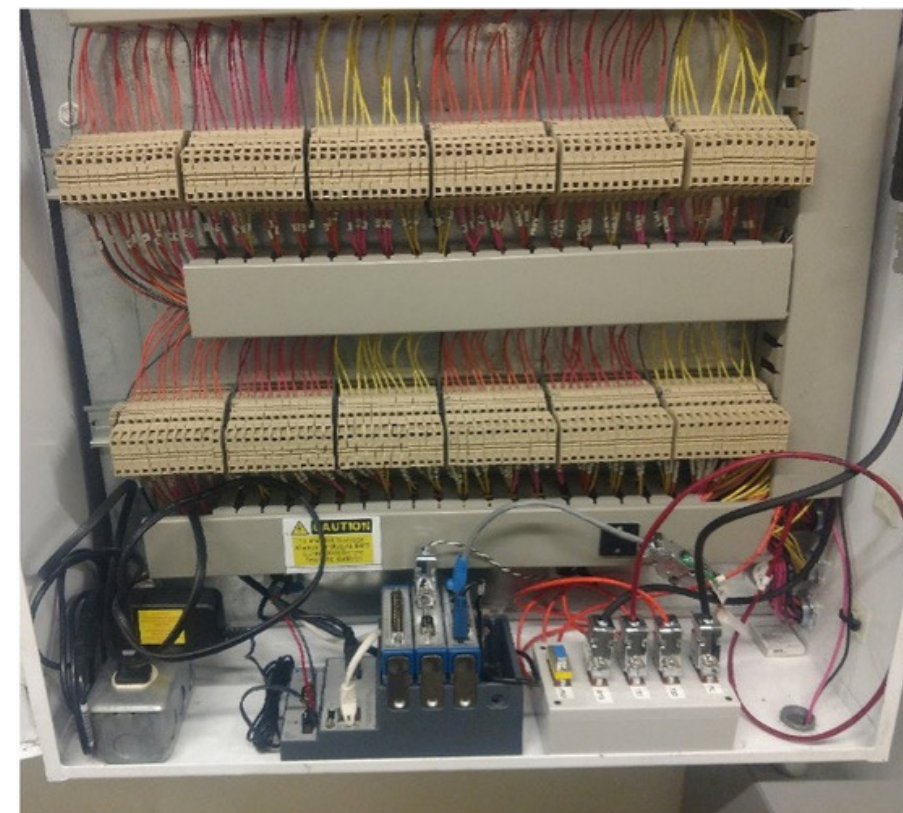

Battery Energy Storage with V2G Integration

- Load management utilizing V2G algorithms
- Smart charging based on distributed generation
- Utility Time of Use (TOU) optimization
- Vehicle activity monitoring
- Carbon based pricing for EV charging

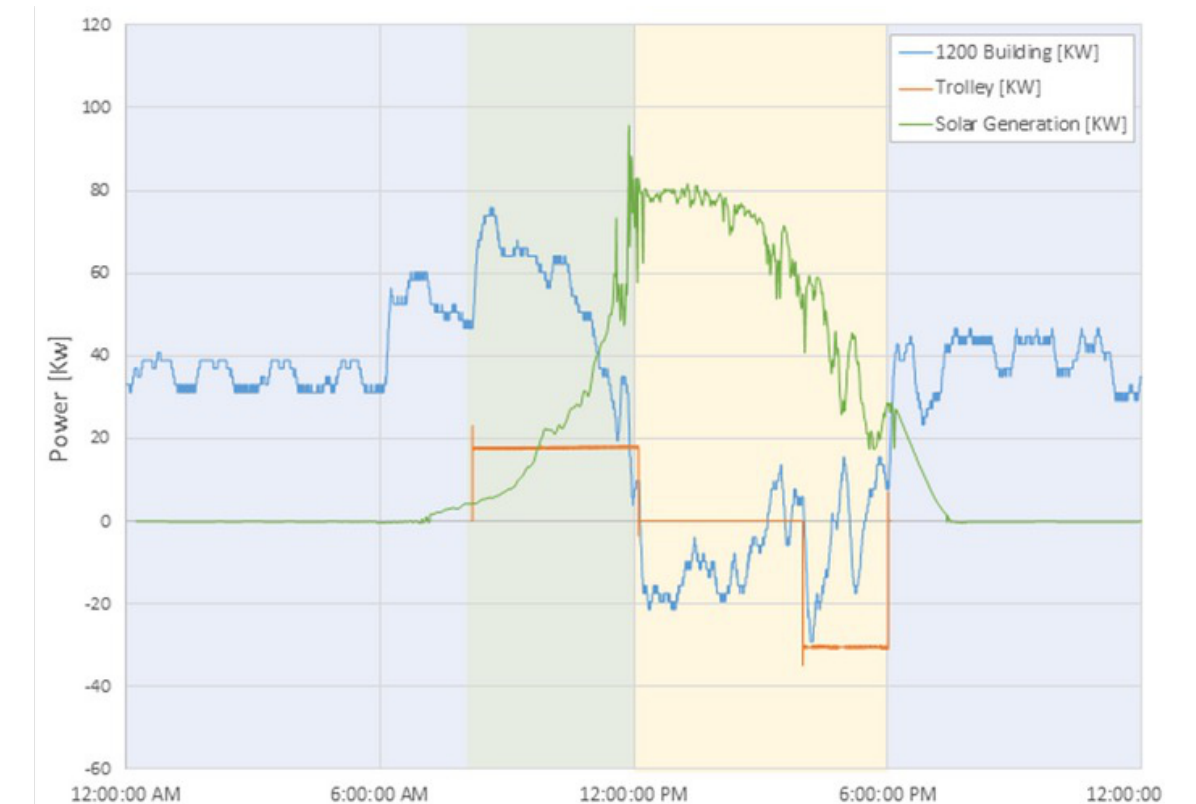

EV charging Monitoring and Control

- Peak shaving and shifting
- Energy cost optimization
- Zero net energy algorithm development
- Utility integrated demand response

Vehicle to Grid (V2G) Testing

UC Riverside

Technology Type	Technology Capabilities
Grid Technologies	<ul style="list-style-type: none">• Electric Vehicle Supply Equipment (EVSE): V2G capability, performance, measurement, access control, billing, communications.
Grid Technologies	<ul style="list-style-type: none">• V2G Capabilities: Energy measurement, capacity, vehicle connectivity, protocols.
Grid Technologies	<ul style="list-style-type: none">• Microgrid Control and Integration: System architecture, net zero configuration, controls, load management.
Grid Storage	<ul style="list-style-type: none">• Load Management: SCADA, islanding, microgrid integration, control optimization, energy profiling.
Transportation	<ul style="list-style-type: none">• Vehicle Activity: Energy profiles, trip activity, charging activity, GIS based analysis, vehicle energy monitoring.

Materials Synthesis, Device Fabrication and Testing

UC Riverside

Address



CE-CERT
1084 Columbia Ave.
Riverside, CA 92507

Point of Contact

Alfredo Martinez-Morales
P: 951-827-8578
E: alfmart@cert.ucr.edu




The Advanced Materials and Energy Devices Laboratory (AMEDL) specializes in renewable energy generation and energy storage. The AMEDL group has expertise in the extensive testing of materials and devices for photovoltaic, photoelectrochemical, piezoelectric, delivery platforms, and battery applications. AMEDL's research is focused on experimental work including high quality synthesis of materials, characterization, device fabrication, measurement photoresponsive measurement under diverse light sources including a solar simulator and UV lamps.

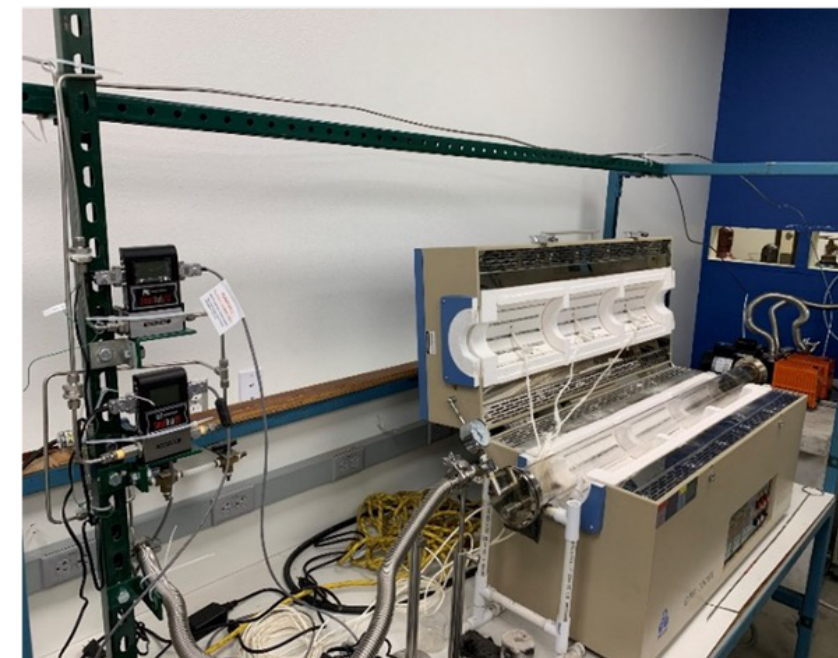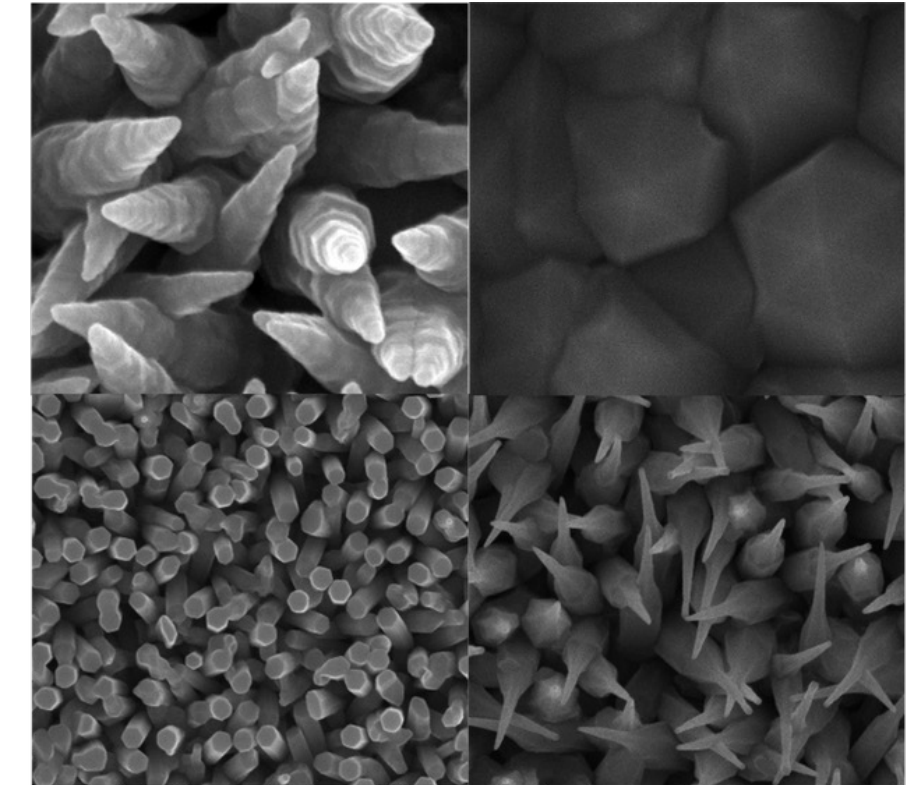

Materials Synthesis, Device Fabrication and Testing

UC Riverside

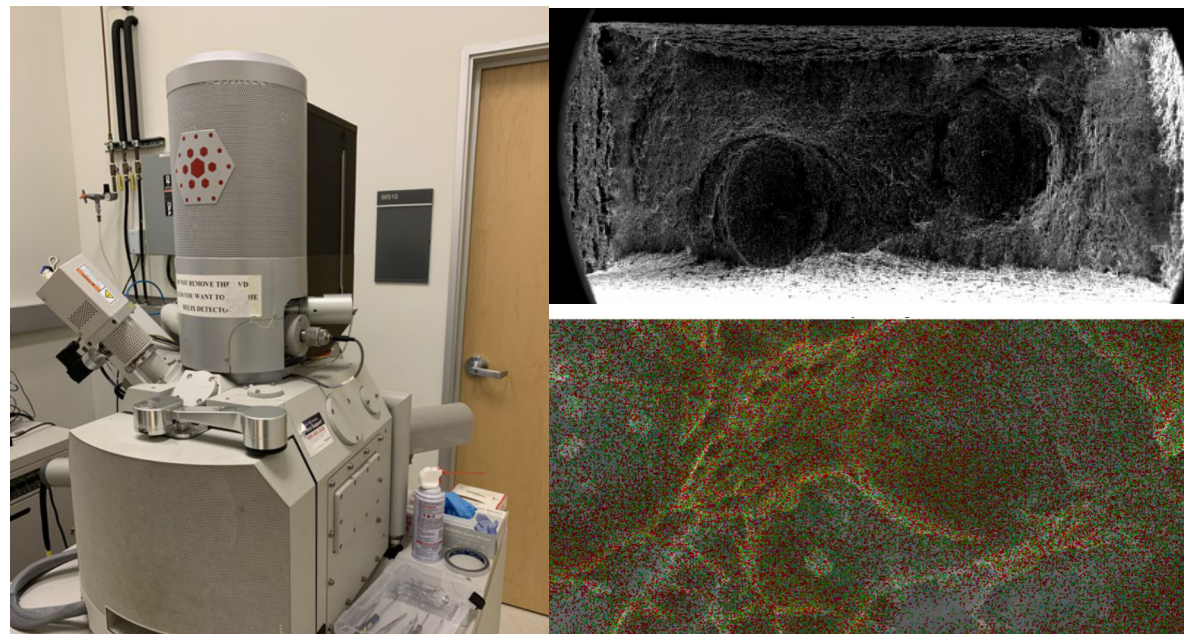


Scanning Electron Microscopy / Energy Dispersive X-ray spectroscopy (SEM/EDS)

- High and low vacuum SEM up to 30 kV accelerating voltage
- Secondary and back-scattered electron modes with TLD, ETD, CBS detectors
- Energy dispersive X-ray spectroscopy for quantitative elemental analysis
- Electron backscattered diffraction phase mapping



High-Resolution Transmission Electron Microscopy / Selected Area Electron Diffraction (HRTEM/SAED)

- 450 W Xe Class AAA solar simulator
- Calibrated with a Certified IEC 60904-9 Edition 2 (2007) spectral match with a thermocouple
- 0.1 to 1 Sun irradiation power adjustment
- Horizontal and vertical beam path
- UV and visible light filters

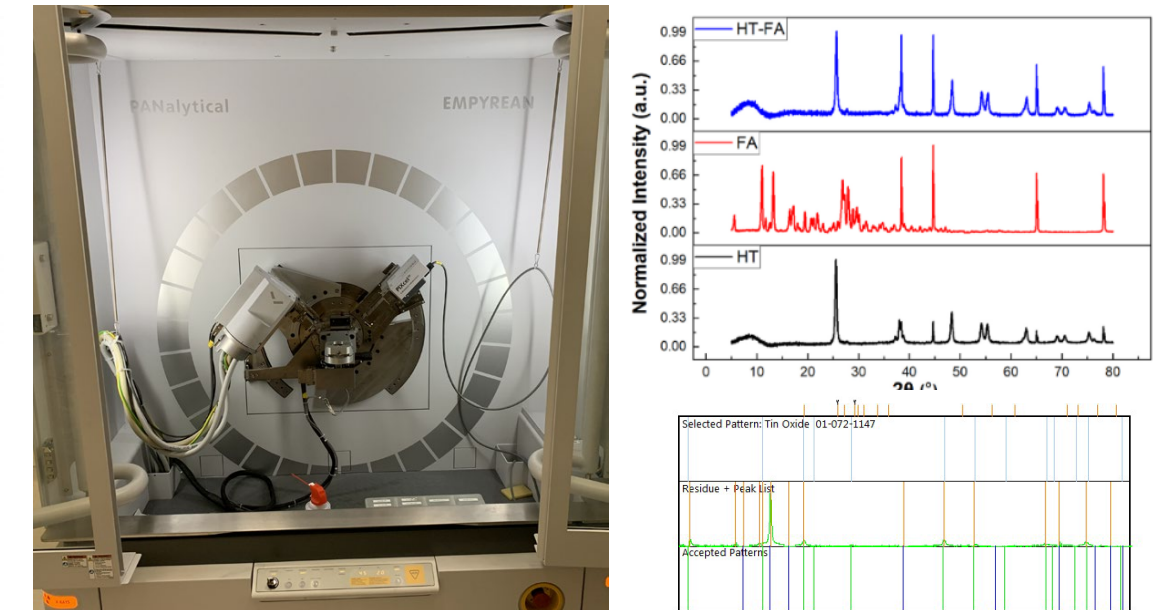

X-ray diffraction analysis (XRD)

- For powder, thin-film, nanomaterials, and solid objectives
- 2θ range from 0° to 168° with 0.01° resolution
- Reflection / Transmission spinner stage


Materials Synthesis, Device Fabrication and Testing

UC Riverside



Inductively Coupled Plasma – Mass Spectroscopy (ICP-MS)

- Metal/non-metal concentration tracing
- Inductively Couple Plasma Optical Emission Spectroscopy (ICP-OES)
- Tracing of metal and several non-metal element up to 1,000 ppm
- 15–30 °C and 20–80% humidity
- 2–260 AMU mass range

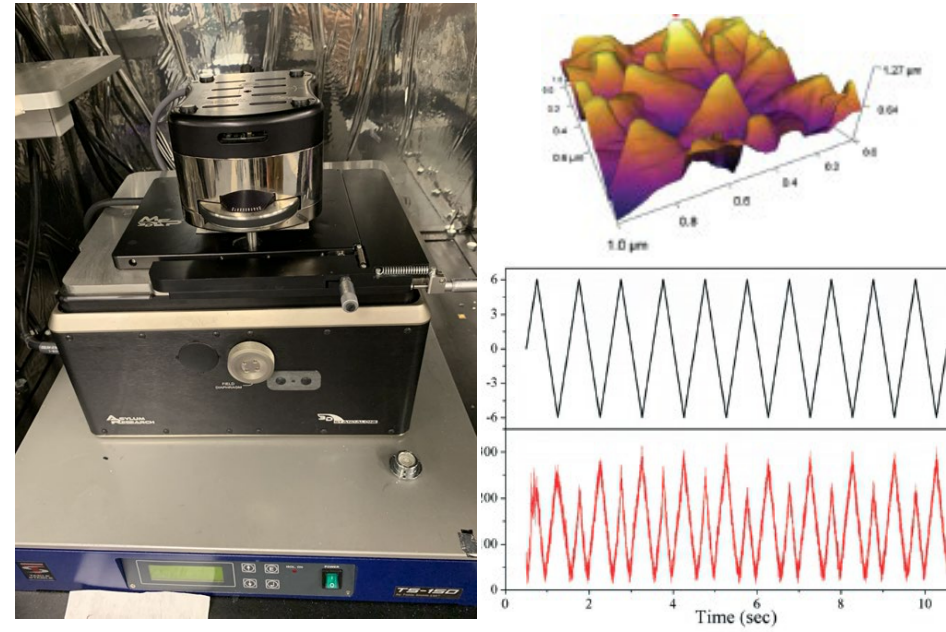


Atomic Force Microscopy (AFM)

- Capable for AFM, piezoresponse force microscopy (PFM), and conductive AFM (CAFM)
- High-resolution imaging with 120 μm XY and 15 μm Z range




Surface Area Analysis

- Brunauer-Emmett-Teller (BET) surface analysis
- Specific surface area and pore size analyzed by the adsorbed gas molecules
- 0.01 m²/g surface area and 0.35 to 400 nm pore size resolution
- Ambient to 450 °C temperature range with 0.1% span accuracy

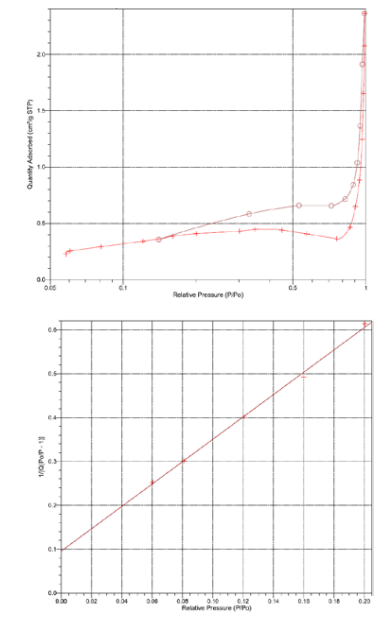


Materials Synthesis, Device Fabrication and Testing

UC Riverside

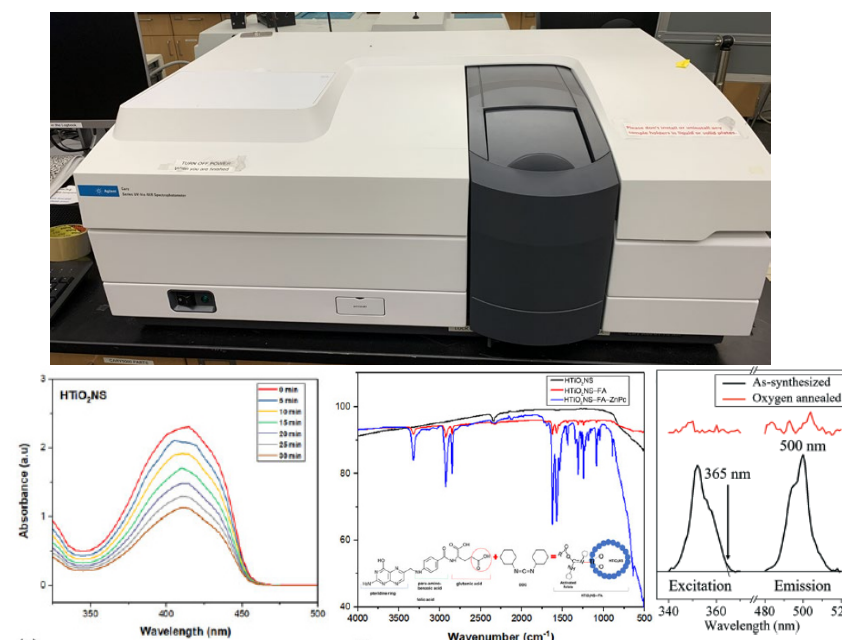


UV-vis / FT-IR / fluorescence (FL) spectroscopies

- UV-vis: From 175 to 3300 nm for extended photometric range with resolution of 0.1 nm, beyond 8.0 absorbance units
- FT-IR: 7500–350 cm⁻¹ spectral range with 0.4 cm⁻¹ resolution, with transmission and attenuated total reflection modes
- FL: Emission range from 185 to 1250 nm with 0.022 nm minimum step and up to 6 mm slit width

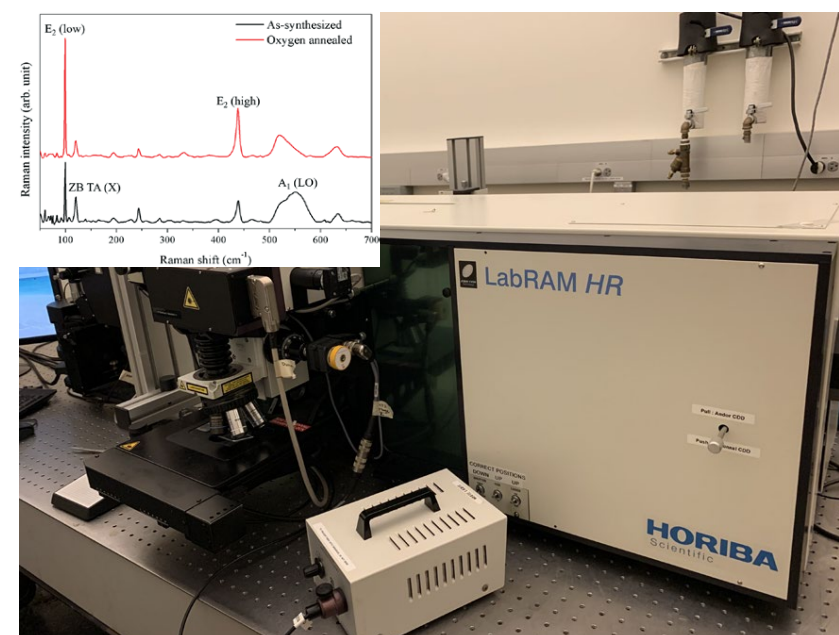

Raman spectroscopy

- Capable Integrated Raman + AFM
- Raman range from 5 cm⁻¹ to 3500 cm⁻¹
- Confocal Raman for 0.5–1 μm resolution
- Capable for Raman + Photoluminescence spectroscopy

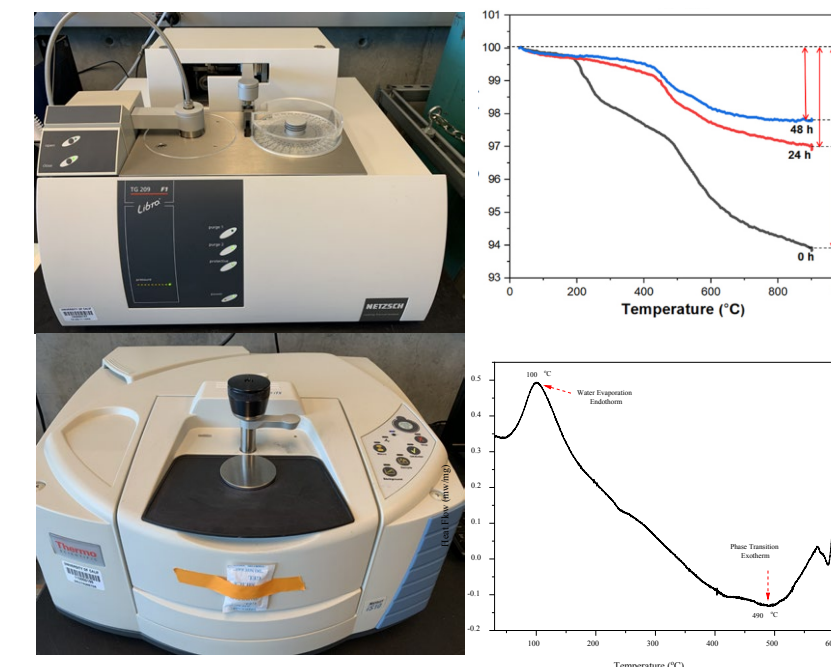

Thermogravimetric Analysis and Differential Scanning Calorimetry (TGA / DSC)

- TGA: 0.1 μg resolution up to 2 g sample weight and 1100 °C temperature. Capable for air and N₂ environment. Heating rate from 0.001 K/min to 200 K/min.
- DSC: 0.1 μW resolution up to 200 mg sample weight capacity. 0.05–0.2% precision for most samples in the temperature range of –40 to 600 °C. Heating rate from 0.001 K/min to 500 K/min


Materials Synthesis, Device Fabrication and Testing

UC Riverside



Arbin Coin Cell Cycler

- 36 test channels
- Voltage range: ± 10 V
- Current range: ± 100 mA, ± 1 mA, ± 10 μ A
- Control accuracy: 0.02% FSR
- Measurement resolution: 24 bit

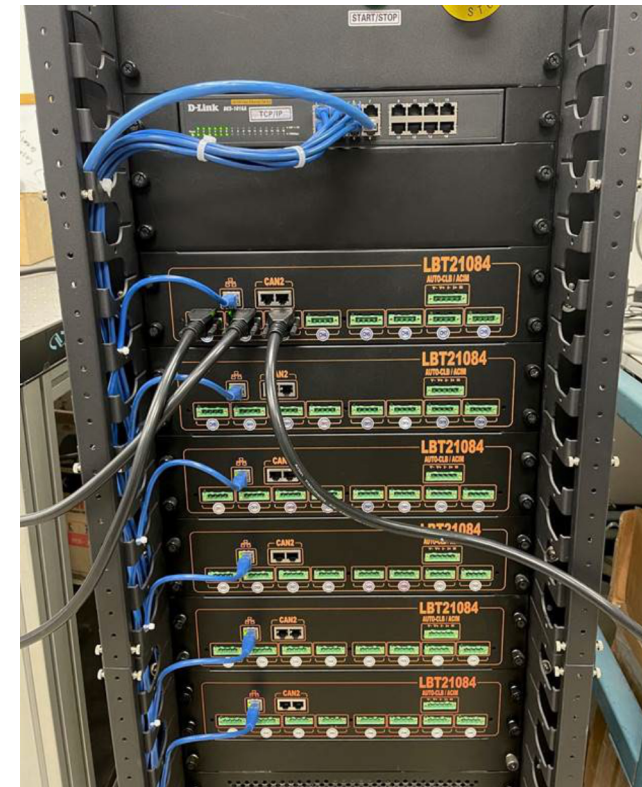

Arbin Pouch Cell Cycler

- 48 test channels
- Voltage range: 0–5 V
- Current range: ± 10 A, ± 500 mA, ± 20 mA, ± 1 mA
- Control accuracy: 0.02% FSR
- Measurement resolution: 24 bit




NHR Large Cell Cycler

- 3 test channels
- Voltage range: 0–40 V, 0–120 V, 0–600 V
- Current range: ± 600 A, ± 200 A, 40 A
- Voltage accuracy: 0.025% FSR
- Current accuracy: 0.1% FSR
- Resolution: 0.005%


Materials Synthesis, Device Fabrication and Testing

UC Riverside

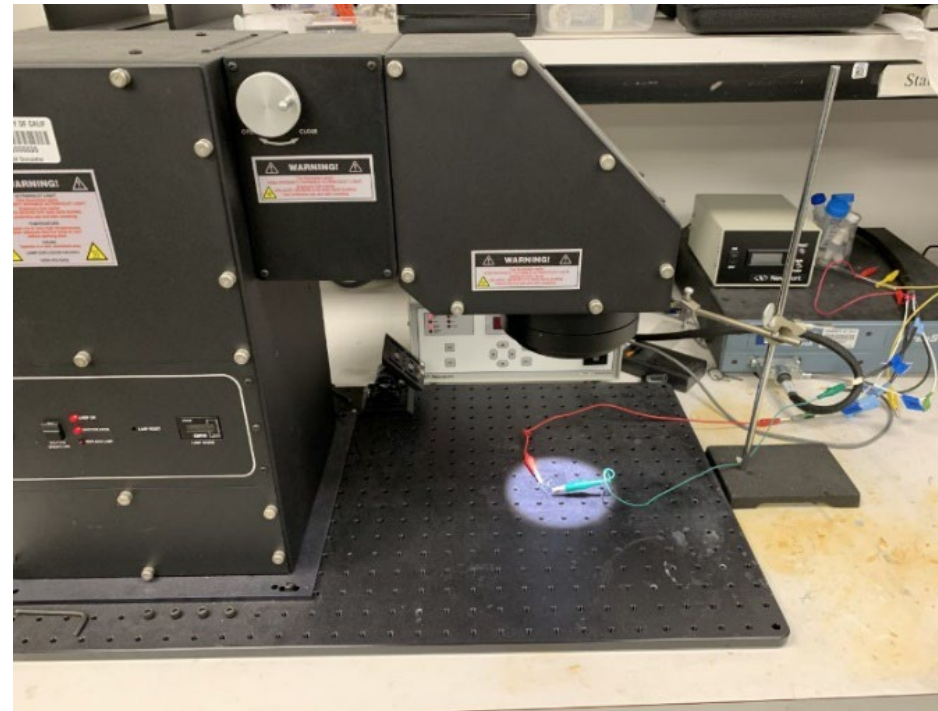

Solar Cell Performance Testing

- 450 W Xe Class AAA solar simulator
- Calibrated with a Certified IEC 60904-9 Edition 2 (2007) spectral match with a thermocouple
- 0.1 to 1 Sun irradiation power adjustment
- Horizontal and vertical beam path
- UV and visible light filters

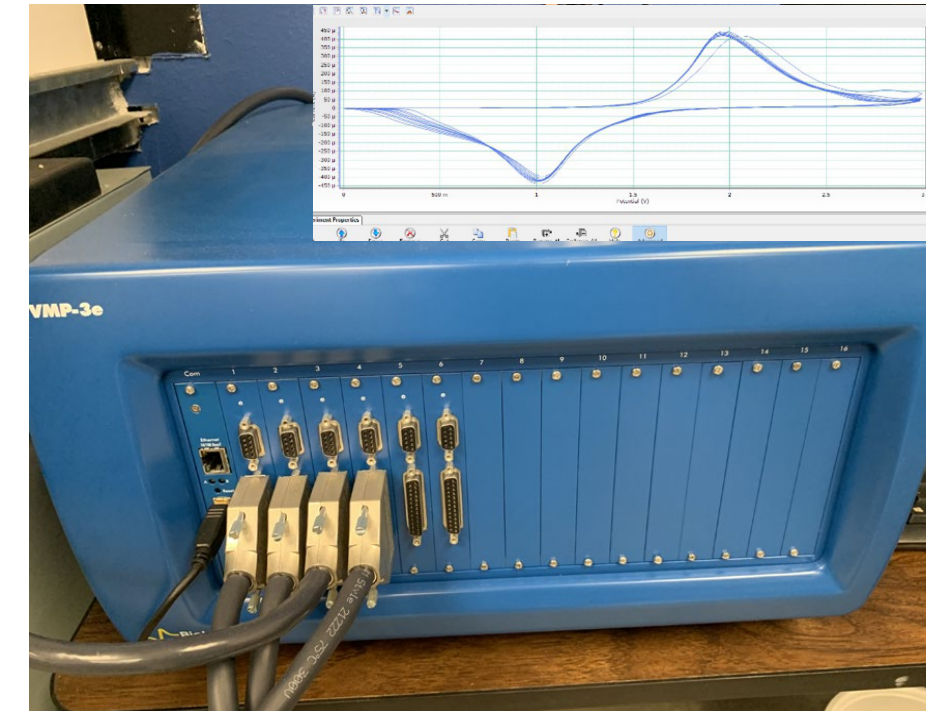

Electrochemical Testing

- Electrochemical depositions and measurements
- Potentiostatic/Galvanostatic and programmed cyclic techniques
- Voltammetry and Electrochemical Impedance Spectroscopy (EIS)
- Current sensitive sensing, corrosion and inhibitors studies, combined with frequency response analyzer (FRA), coating technologies

Materials Synthesis, Device Fabrication and Testing

UC Riverside

Technology Type	Technology Capabilities
Renewable Generation	<ul style="list-style-type: none">• Solar Cells – Efficiency, stability, testing under artificial environment, and testing of next-generation solar cells.
Energy Storage	<ul style="list-style-type: none">• Batteries – Charging/discharging, cyclic performance, long-term stability, and rate performance.
Material-Based	<ul style="list-style-type: none">• Electrochemical Cells – Cyclic/linear/chrono voltammetry, coulometry and potentiometry, and electrochemical impedance spectroscopy.
Material-Based	<ul style="list-style-type: none">• Materials Characterization – Electron microscopy, optical spectroscopy, crystallographic analysis, elemental analysis, and surface topography.
Material-Based	<ul style="list-style-type: none">• Materials Synthesis – Chemical vapor deposition (CVD), hydrothermal and solvothermal synthesis, and electrodeposition.
Material-Based	<ul style="list-style-type: none">• Device Fabrication – Thin-film devices, solar cells, photoelectrochemical cells, electrochemical cells, and coin-cell batteries.

Hydrogen Blending & Exposure Testing

UC Riverside

Address

CE-CERT
1084 Columbia Ave.
Riverside, CA 92507

Point of Contact

Arun Raju
P: 951-827-8544
E: arun@engr.ucr.edu




The Hydrogen Laboratory, part of the Sustainable Fuels Initiative, conducts research on sustainable hydrogen production, transport, and use areas. The facilities are setup to investigate the effects of adding hydrogen to natural gas in the existing natural gas transmission and distribution system at varying hydrogen concentrations. The Hydrogen Lab is designed to study the effect of hydrogen blends and other key parameters on pipeline infrastructure materials and components including embrittlement, degradation, and leakage behavior. Lab capabilities include hydrogen blending, gaseous hydrogen exposure, electrochemical hydrogen charging, leak testing, gas composition analysis, elemental analysis, and Charpy impact testing. Other capabilities include green hydrogen production, hydrogen fuel cell vehicle infrastructure planning, and policy analysis.




Hydrogen Blending & Exposure Testing

UC Riverside

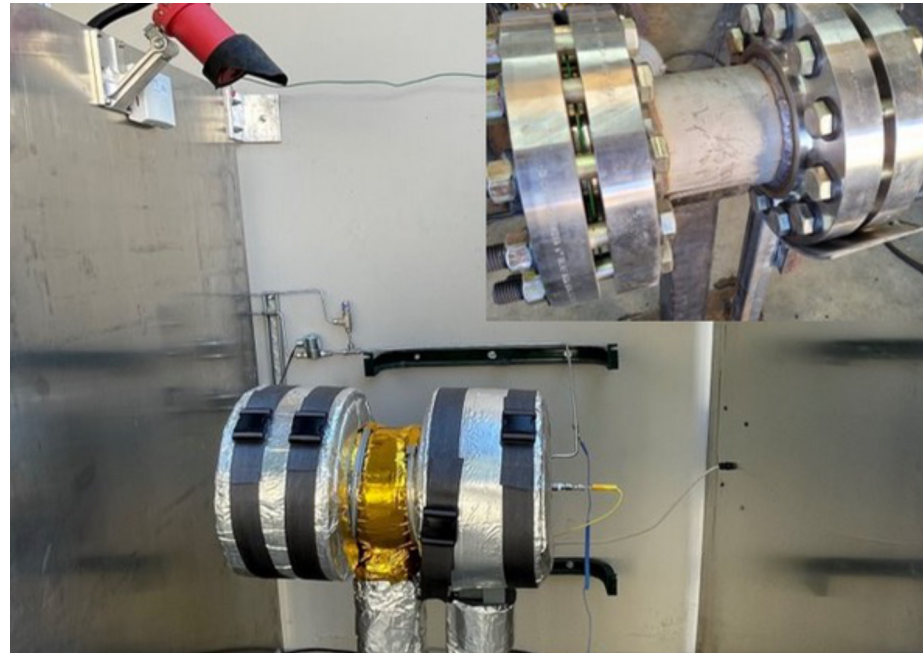

Gaseous Hydrogen Charging

- Prolonged exposure in gaseous Hydrogen environment, at pressure of up to 1,000 psig and temperature of up to 250° F
- Chamber dimensions:
 - Length: 12 in, diameter: 6 in

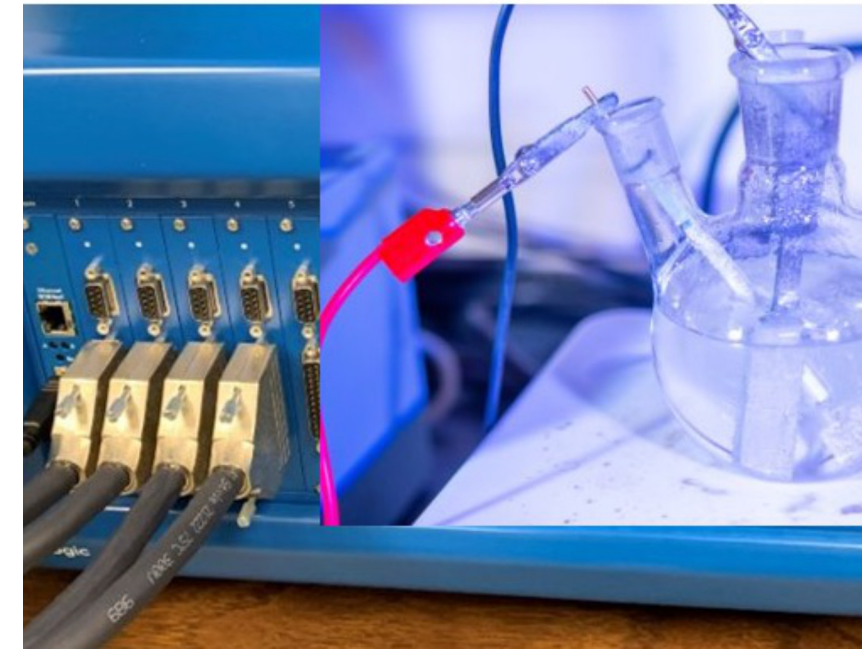

Electrochemical Hydrogen Charging

- Electrochemical hydrogen generation from water electrolysis by multi-channel potentiostat
- Simulated hydrogen-exposed environment in a cost-efficient and safe way
- Potentiostatic/Galvanostatic hydrogen exposure in various pH condition
- Electrochemical measurement of diffusive hydrogen

Hydrogen Blending & Exposure Testing

UC Riverside




Charpy Impact Toughness Testing

- Meets ASTM E8 standard testing methods
- 500 N and 50 kN load cells range
- Tensile, compression, and fracture test



Hardness Testing

- Meets ASTM E-18 standard
- Digital Rockwell hardness tester
- Wilson Rockwell 4TT twin hardness tester
- Measures the hardness by indenting the surface with major and minor loads

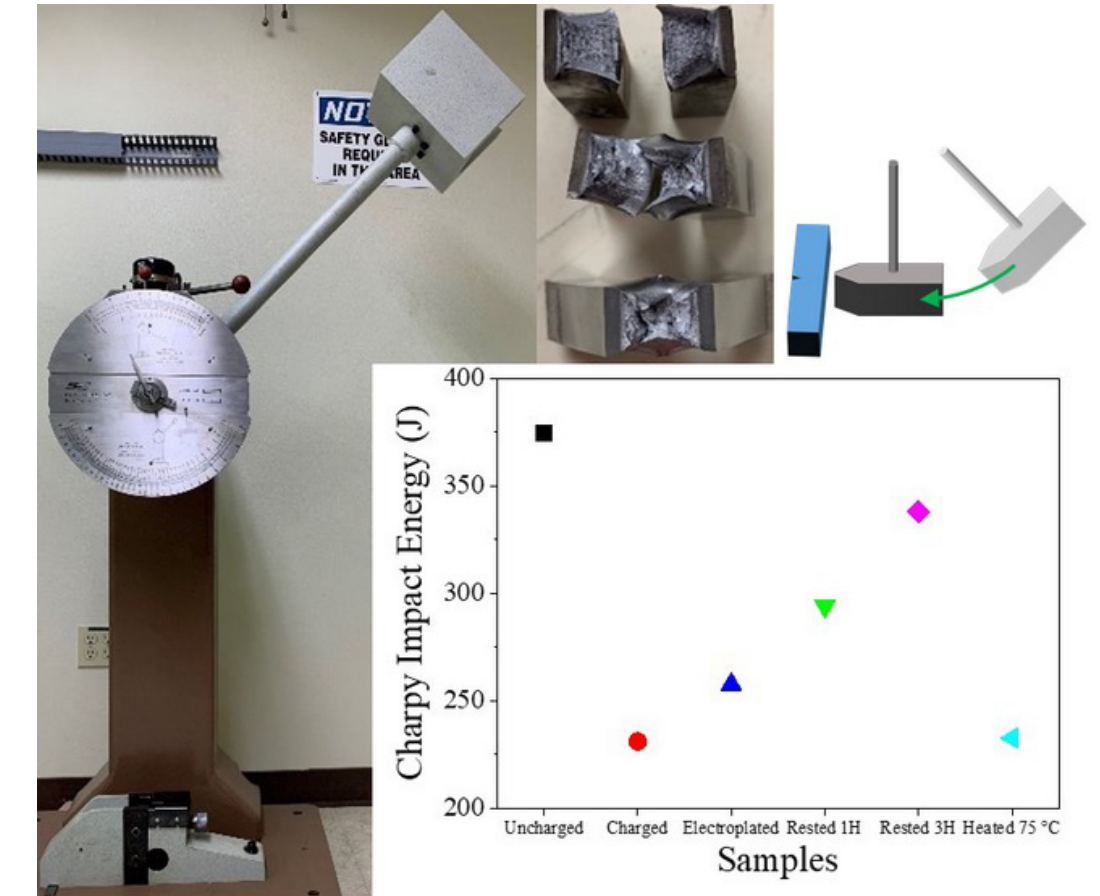


Tensile Strength Testing

- Meets ASTM E23 standard testing methods
- Horizontal and vertical impact toughness testing on the V-notched specimen
- Heated and cooled testing up to 400 J


Hydrogen Blending & Exposure Testing

UC Riverside

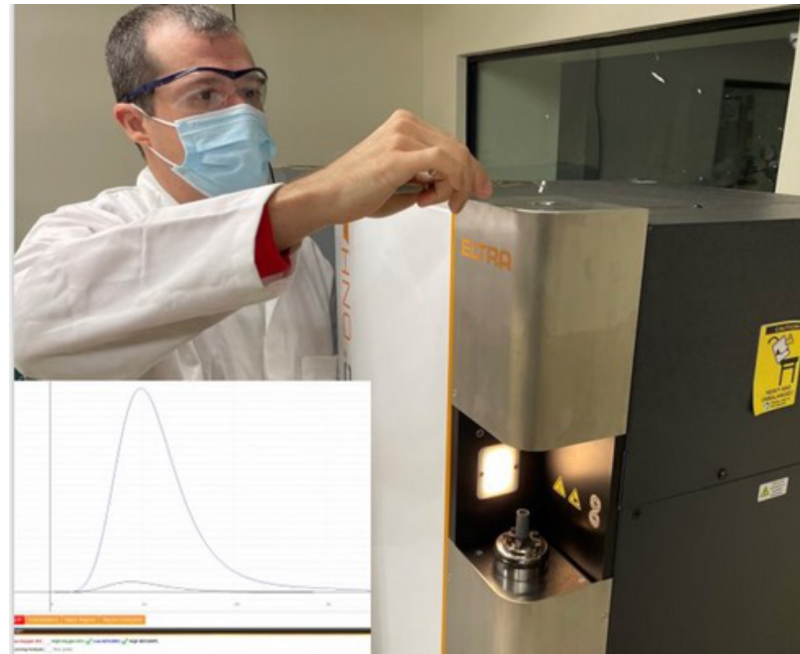

ONH Elemental Analysis

- Analysis of Hydrogen, Oxygen and Nitrogen content in inorganic samples
- IR and TCD high sensitivity detectors with wide detections range:
 - Hydrogen: 0.1 to 1,000 ppm
 - Oxygen: 0.1 ppm to 1%
 - Nitrogen: 0.1 ppm to 2%

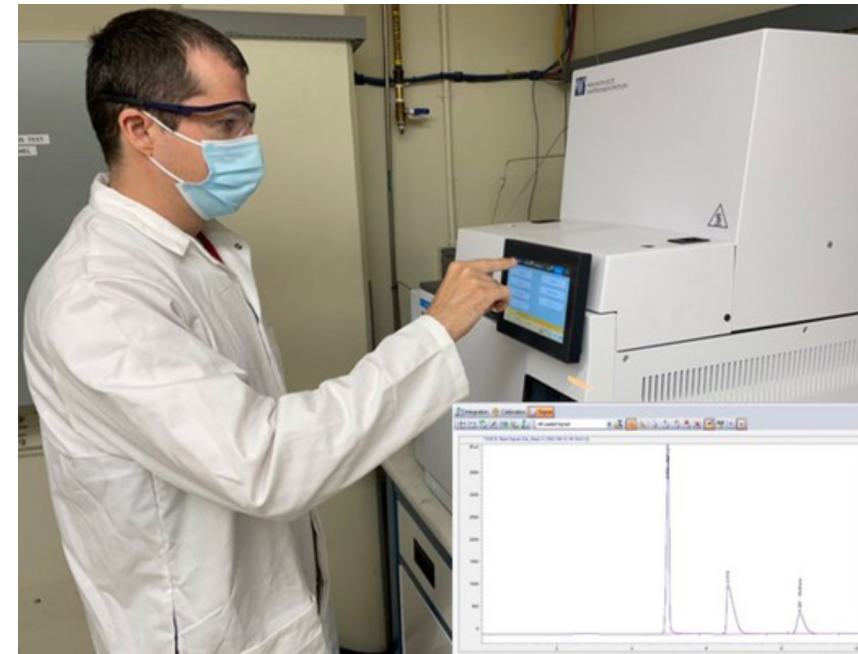

Gas Chromatography

- Identification and quantification of gases and wide range of organic compounds
- High sensitivity TCD and FID detectors
- Equipped with injection port and direct gas sampling port
- Reference gases or solutions required for calibration



Gas Leak Evaluation

- Identification and quantification of gas leaks from piping components
- High accuracy flow meters operating in the range of 5 and 2,000 ml/min at pressure of up to 50 psig
- Gas leak compositional analysis performed through gas chromatography

Hydrogen Blending & Exposure Testing

UC Riverside

Technology Type	Technology Capabilities
Materials-Based	<ul style="list-style-type: none">• Elemental Analysis – Analysis of Hydrogen, Oxygen and Nitrogen content in inorganic solids.
Materials-Based	<ul style="list-style-type: none">• Gas Chromatography – Identification and quantification of gases and a wide range of organic compounds in solution or gas phase
Renewable Generation	<ul style="list-style-type: none">• Gas Leakage – Evaluation and quantification of gas leaks at flow rates between 5 and 2,000 ml/min at pressure of up to 50 psig
Materials-Based	<ul style="list-style-type: none">• Gaseous Hydrogen Charging – Prolonged exposure in gaseous Hydrogen environment, at pressure of up to 1,000 psig and temperature of up to 250° F
Materials-Based	<ul style="list-style-type: none">• Electrochemical Hydrogen Charging – Controllable charging rate and pH environment
Materials-Based	<ul style="list-style-type: none">• Mechanical Strength Testing – Tensile strength, compression, fracture testing, hardness testing, and Charpy impact toughness

Shared, Electric, Connected, and Automated Vehicle Testing

UC Riverside

Address

CE-CERT
1084 Columbia Ave.
Riverside, CA 92507

Point of Contact

Matt Barth
P: 951-827-2992
E: matthew.barth@ucr.edu



When considering how to get to zero-carbon mobility, there are generally four strategies to consider: 1) build more efficient vehicles that emit less carbon (e.g., HEVs, BEVs, and fuel-cell EVs); 2) utilize low-or zero-carbon fuel such as electricity or hydrogen; 3) implement programs that reduce overall VMT; and 4) employ ITS and automation technology to improve transportation system efficiency. UC Riverside has set up testbeds to evaluate Shared Mobility (addressing strategy 3), Transportation Electrification (addressing strategies 1 & 2), and Connected and Automated Vehicles (addressing strategy 4).






Shared, Electric, Connected, and Automated Vehicle Testing

UC Riverside




A key vehicle testbed, the Innovation Corridor, located in Riverside, California, consists of a six-mile section of University Avenue between the main UCR campus and downtown Riverside. This arterial corridor has been outfitted with traffic signal controllers that broadcast signal phase and timing, employ video analytics, and is used for experimentation with shared, electric, connected and automated vehicle (e.g., cars, buses, and trucks).

<https://www.cert.ucr.edu/transportation-systems-vehicle-infrastructure-interaction/city-riverside-innovation-corridor>

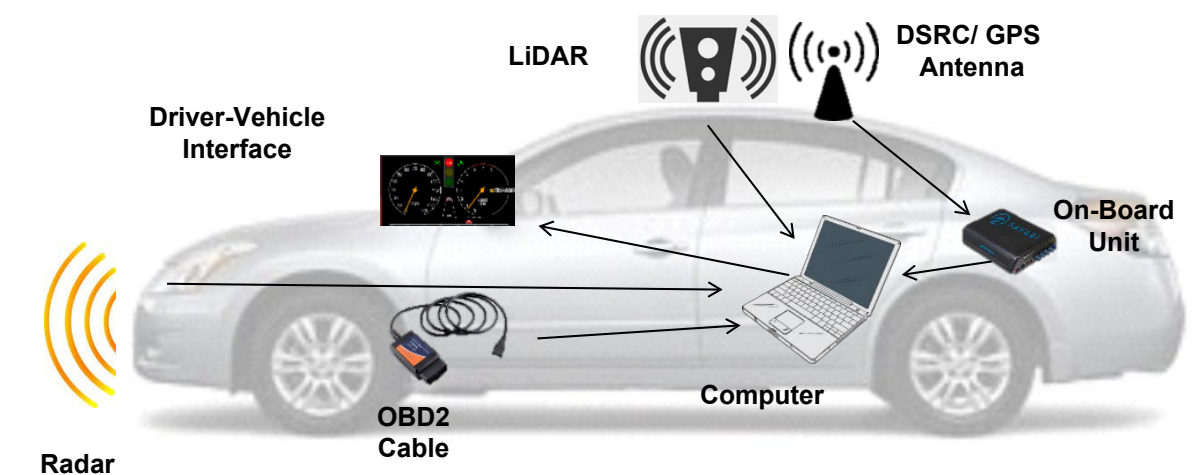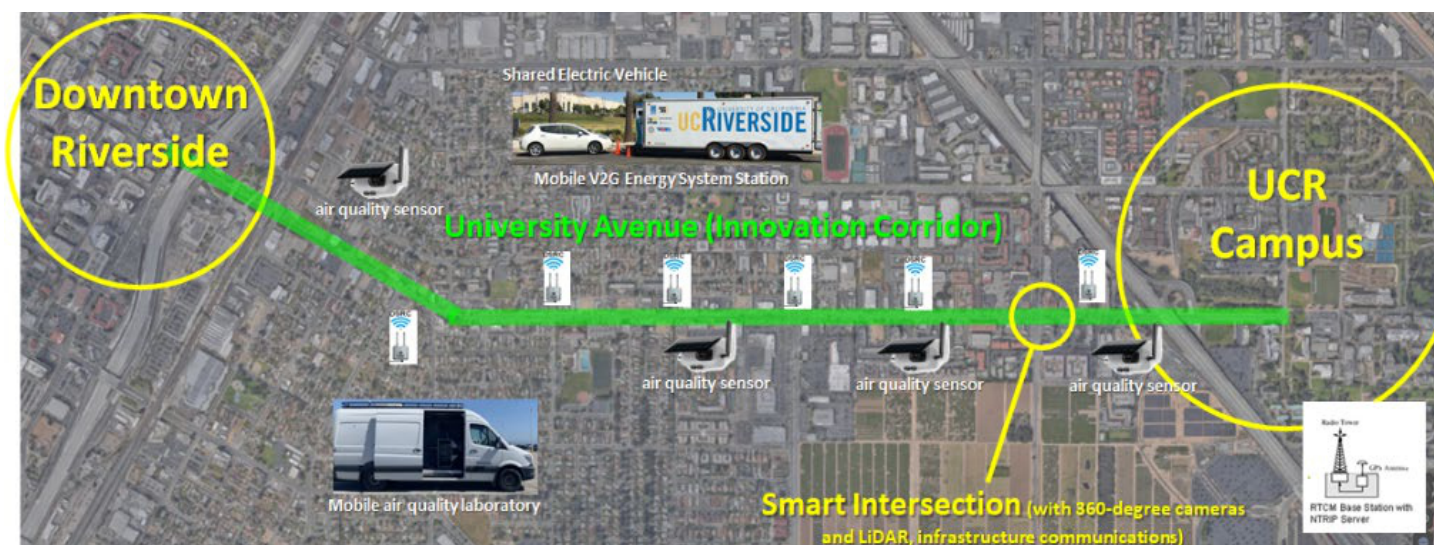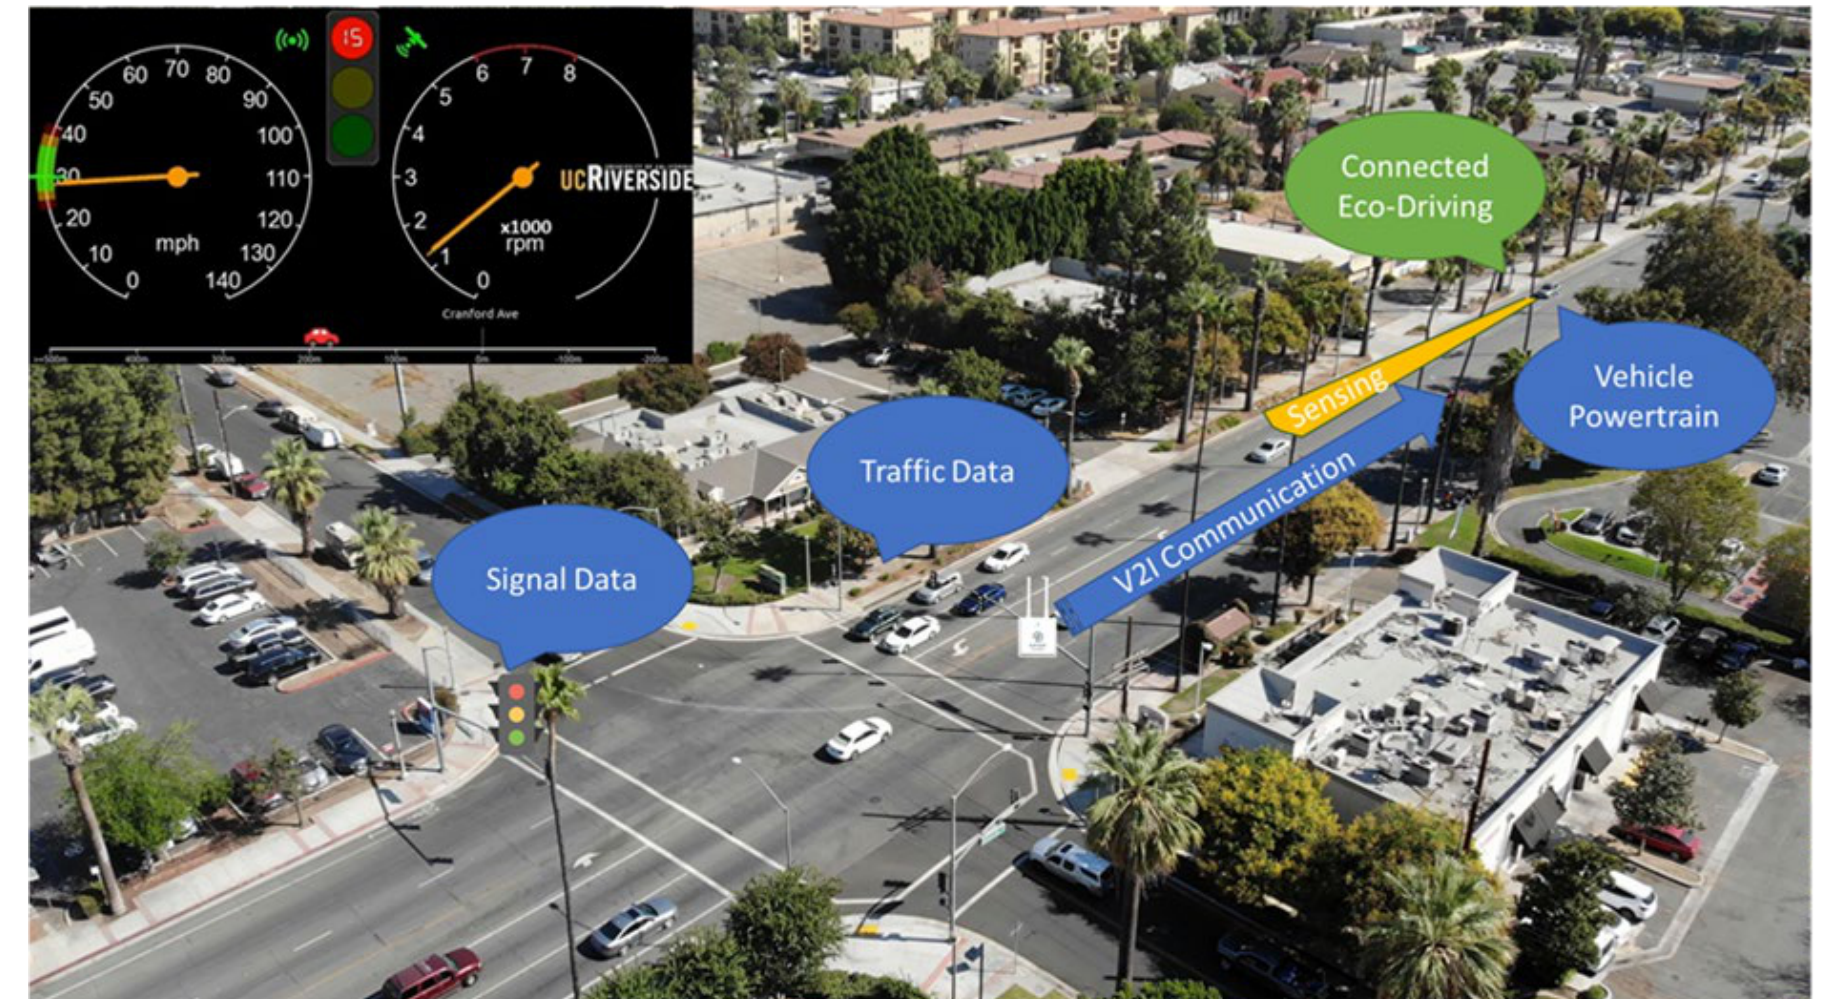

Shared, Electric, Connected, and Automated Vehicle Testing

UC Riverside

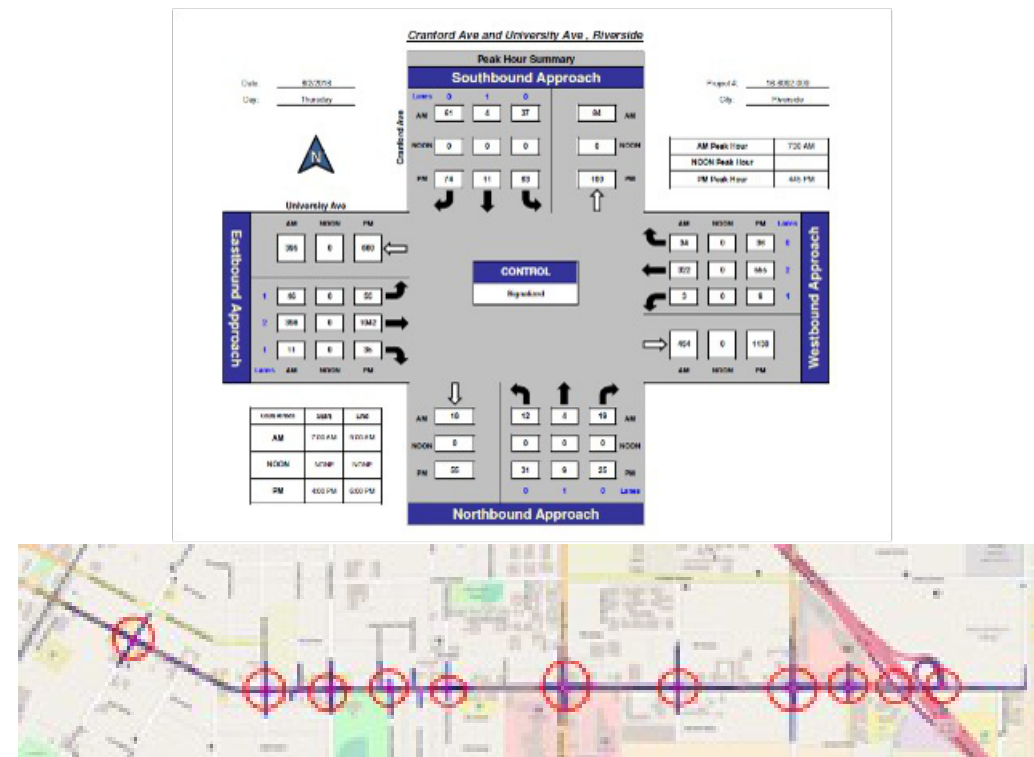

Innovation Corridor


Consists of 10 instrumental intersections along a 4-lane urban arterial. Intersections utilize modern traffic signal controllers that broadcast signal phase and timing and employ video analytics; Corridor also has multiple air quality monitors.



Example connected vehicle application

The corridor is used to conduct Eco-approach and departure studies at signalized intersections. Vehicles can "listen" to an upcoming signal's phase and timing and adjust their speed to reduce energy consumption and improve throughput.

Demo at: <https://youtu.be/j9Tg2g9YTjc>

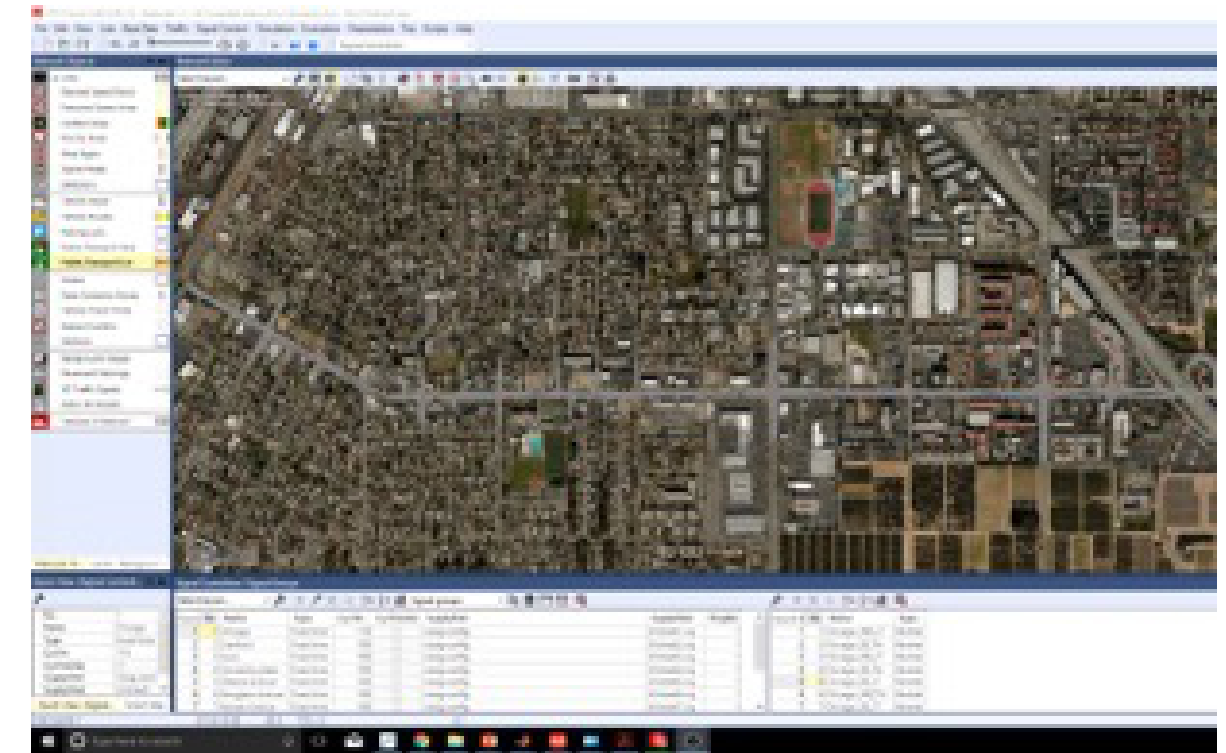


Simulation and testing platforms

Complementing real world testing, modeling enables the projection of mobility and environmental benefits from the wide-scale adoption of shared, electric, connected and automated vehicle technologies.

Shared, Electric, Connected, and Automated Vehicle Testing

UC Riverside

Southern California CAV Testbed

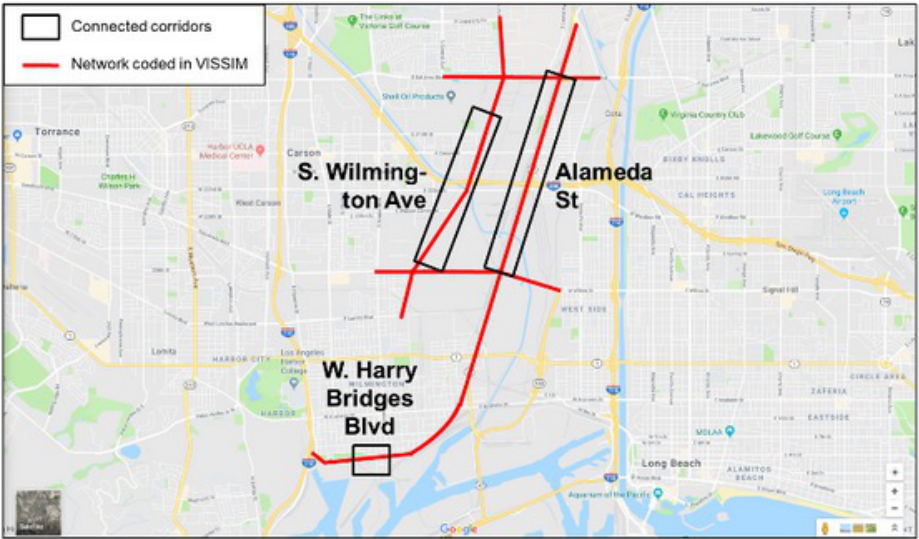

Los Angeles Testbed


UCR has set up three arterial corridors with 15 connected traffic signals nearby the port of Los Angeles to support a variety of connected truck applications such as Eco-Approach and Departure, freight signal priority.

See demo at:

<https://youtu.be/1CRvMh8ufE>

Alameda St

- 3-mile segment
 - 2-3 lanes per direction
 - 45 mph speed limit
- 6 traffic signals
 - 5 connected
 - Actuated signal control

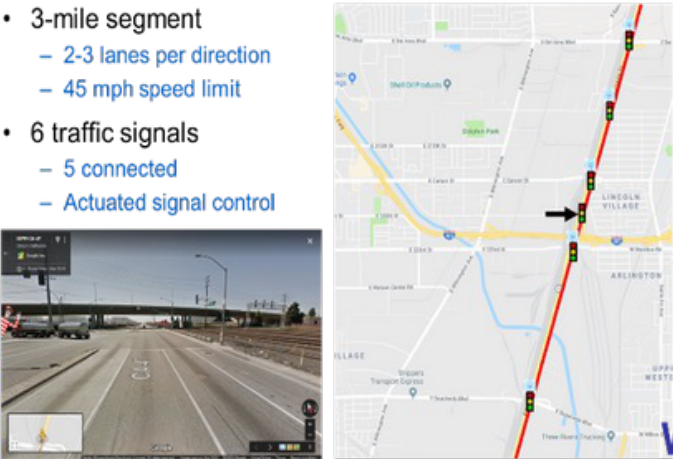



W. Harry Bridges Blvd

- 0.5-mile segment
 - 2 lanes per direction
 - 35-40 mph speed limit
- 5 traffic signals
 - 5 connected
 - Fixed-time signal control



S. Wilmington Ave

- 2-mile segment
 - 2 lanes per direction
 - 40 mph speed limit
- 9 traffic signals
 - 5 connected
 - Actuated signal control

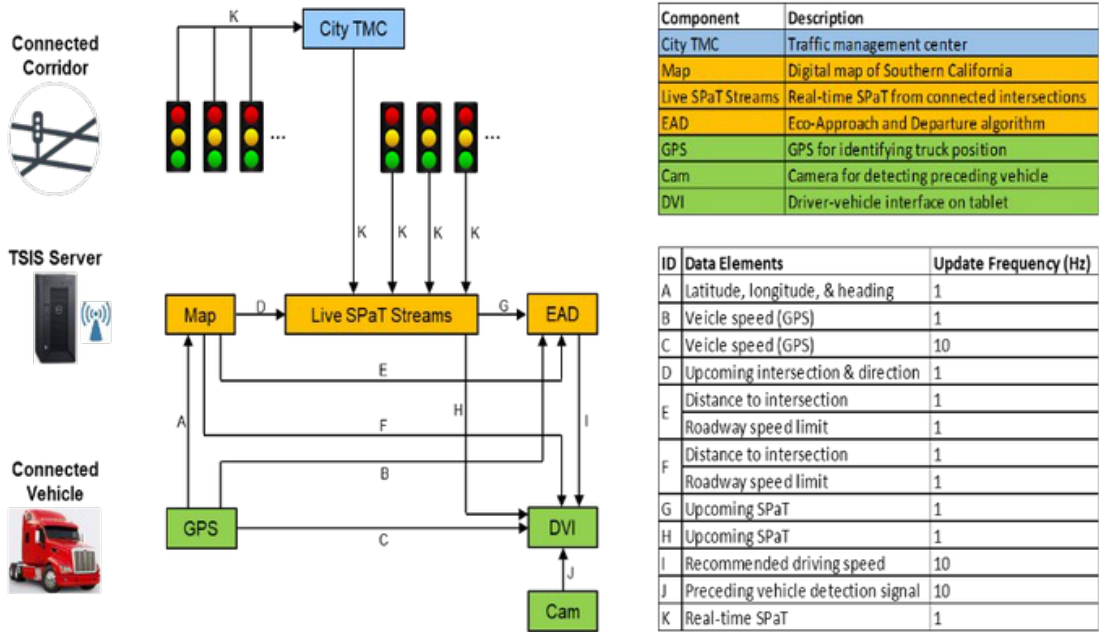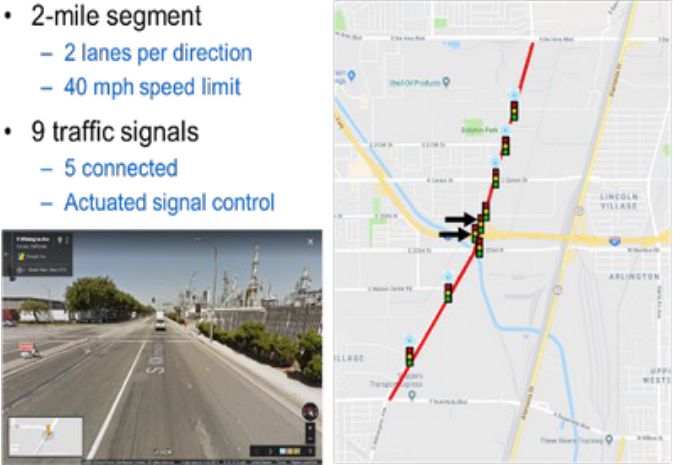

Traffic Signal Information System (TSIS)

The connectivity of these connected traffic signals is enabled by 4G/LTE cellular communication where real-time signal phase and timing (SPaT) information is sent to the Traffic Signal Information System (TSIS) server at UCR. Vehicles traveling on the testbed can request and receive the SPaT information from the TSIS server through the same cellular communication. Currently, the testbed is being used to test and evaluate an EAD application for heavy-duty trucks, developed by UCR.

Shared, Electric, Connected, and Automated Vehicle Testing

UC Riverside

Technology Type	Technology Capabilities
Transportation	<ul style="list-style-type: none">• Shared Mobility Evaluation: Using LBNL’s BEAM model, travel demand activity can be evaluated for a number of shared mobility scenarios, measuring a variety of performance metrics.
Transportation	<ul style="list-style-type: none">• Evaluating Connected and Automated Vehicles (CAVs) in Simulation: Using a wide range of simulation tools (e.g., VISSIM, PARAMICS, SUMO) and specific APIs, a wide range of CAV scenarios can be tested.
Transportation	<ul style="list-style-type: none">• Evaluating Connected and Automated Vehicles (CAVs) using Hardware in the Loop testing: A unique hardware-in-the-loop testing system for CAVs has been developed, combining traffic simulation and a real-world vehicle on a dynamometer.
Transportation	<ul style="list-style-type: none">• Evaluating Connected and Automated Vehicles (CAVs) on the road: UCR has developed several CAV testbed sites in Riverside California, and Carson California, installing communication infrastructure on the road.

Electrical Motor Systems Testing Laboratory


UC Riverside

Address

CE-CERT
1084 Columbia Ave.
Riverside, CA 92507

Point of Contact

Sadrul Ula
P: 951-827-8577
E: sadrul.ula@ucr.edu




The testing facility, developed with California Energy Commission (CEC) funding, is capable of efficiency and load testing of electric motors and Adjustable Speed Drive (ASD) up to 100hp. The facility can also measure electric system harmonics.

This is the first independent electric motor testing center in the state of California capable of providing unbiased evaluation of motor efficiency at various operating conditions. This facility is available for the use by the industry professionals, academics, and other stakeholders.



Electrical Motor Systems Testing Laboratory

UC Riverside

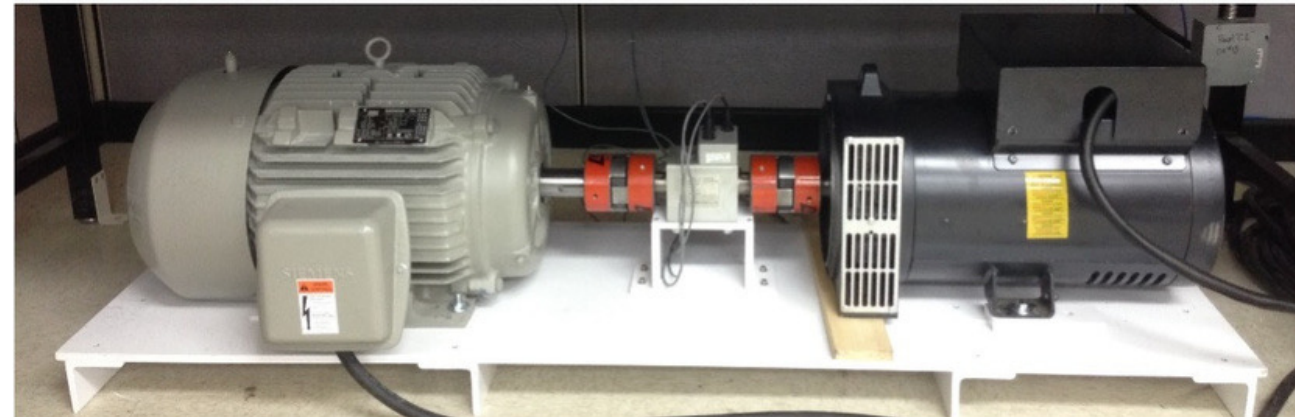

Motor

Torque Transducer

Loading
Generator




Power
Analyzers

Motor Efficiency Measurement & Verification

Output power is monitored and measured using the torque transducer, which separates the load from the motor to isolate output measurement at the shaft of the motor.

External portable Fluke Power Analyzers enable the accurate measurement of both input and output power necessary to find operational efficiency of a motor. This used to verify efficiency of an electric motor.

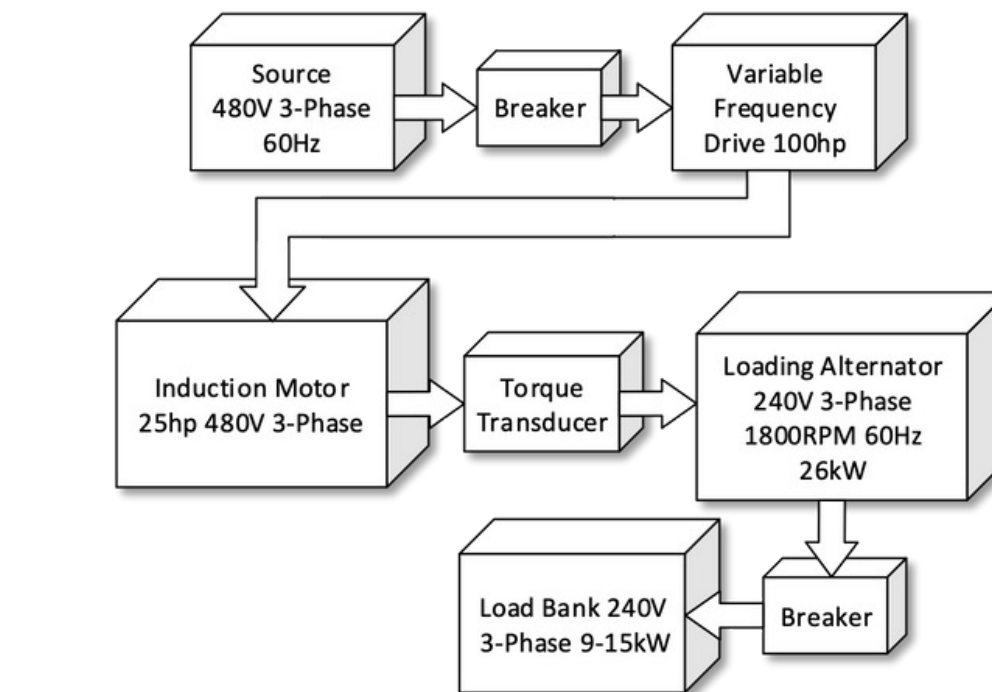

Improving Software for Efficient Motor Selection

Many commercial and in-house software used by architectural and engineering firms design HVAC systems with inflated safety factors used in calculating three-phase motor sizes for buildings.

UCR quantifies energy waste due to the: (i) use of lower efficiency motors, (ii) use of oversized motors in existing buildings, and (iii) selection of oversized motors in the architectural and engineering design stage of new buildings.

Electrical Motor Systems Testing Laboratory


UC Riverside

The CE-CERT motor testing lab personnel will coordinate with the sponsor to design a custom mount by measuring the dimensions of the test motor and have a mount fabricated and installed on the testing platform. Once installation is complete, the CE-CERT team will integrate controls and operational data parameters into the motor testing data acquisition architecture. The complete testing setup usually comprises a motor controller, power meter, and torque transducer display. Data will be collected upon completion of motor testing system integration and shared with the sponsors.

Typical testing services include four functions of the Motor TestBed operations:

- 1. Test Plans
- 2. Testing System Integration Functionality
- 3. System Operational Data
- 4. Motor Efficiency Measurement & Verification
- 5. Operational Analysis Results

Motor Efficiency Measurement & Verification

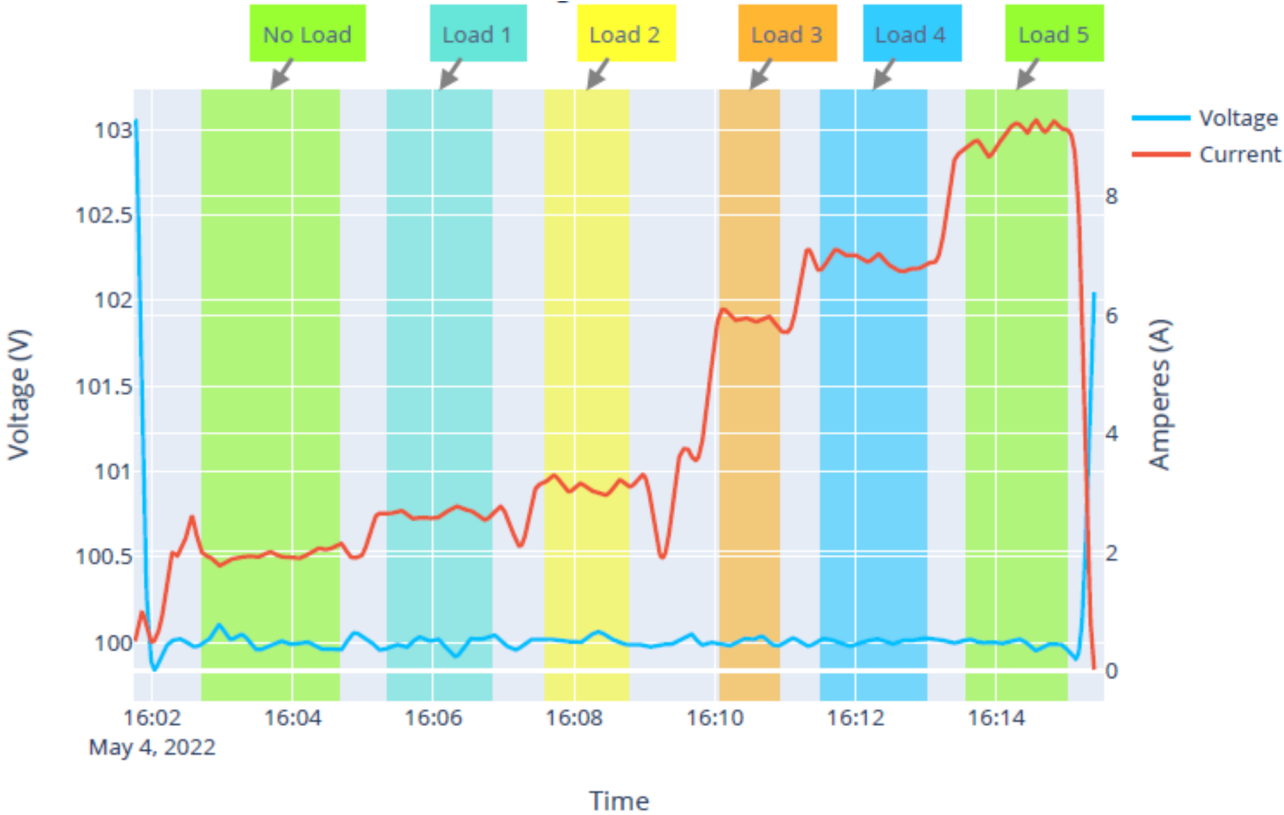

Input Voltage and Current at 1,000 RPM

	Load 0	Load 1	Load 2	Load 3	Load 4	Load 5
Input Voltage (V)	100.0	100.0	100.0	100.0	100.0	100.0
Input Current (A)	1.9	2.6	3.1	5.9	6.9	9.0
Input Power (W)	192.5	260.6	305.9	591.2	689.9	895.6
Output Torque (Nm)	0.9	1.4	1.7	3.8	4.6	6.0
Output Power (W)	98.1	144.4	178.2	398.9	479.6	628.9
Motor Efficiency (%)	50.9	55.4	58.2	67.5	69.5	70.2

Motor and Controller Combined Efficiency at 1,000 RPM

Electrical Motor Systems Testing Laboratory

UC Riverside

Technology Type	Technology Capabilities
Transportation	<ul style="list-style-type: none">Industrial Electric Motors: Zero to Rated Torque, Efficiency at Various Loading Condition, Quantification of Voltage and Current Harmonics, Range 0-100hp
Transportation	<ul style="list-style-type: none">Variable Frequency Drives: Efficiency at Various Loading Condition, Quantification of Voltage and Current Harmonics, Range 0-100hp
Transportation	<ul style="list-style-type: none">Custom Designed Special Purpose Electric Motors: Zero to Rated Torque, Efficiency at Various Loading Condition, Quantification of Voltage and Current Harmonics, Range 0-100hp
Renewable Generation	<ul style="list-style-type: none">Wind Generators: Zero to Rated Torque, Efficiency at Various Loading Condition, Quantification of Voltage and Current Harmonics, Range 0-100hp

Water Energy Nexus

UC Riverside

Address

CE-CERT
1084 Columbia Ave.
Riverside, CA 92507

Point of Contact

Sadrul Ula
P: 951-827-8577
E: sadrul.ula@ucr.edu



About 20% of electricity use in California is treating, pumping, and distribution of water. With funding from California Energy Commission (CEC), College of Engineering – Center for Environmental Research and Technology (CE-CERT) at the University of California, Riverside (UCR) has demonstrated and deployed an energy management and data acquisition and supervisory control strategies that reduce peak loads and electricity costs in the delivery and treatment of water at each of the three water district locations. The three deployments utilize existing on-site SCADA architecture and implement the Energy Management System (EMS) within the existing architecture.


This demonstration project highlights a pathways for water agencies in California to reduce their peak energy consumption substantially with no decrement in service or reliability. The project also identifies "real world" implementation issues that have not emerged in previous proof-of concept research.



OPTO 22

Water Energy Nexus

UC Riverside

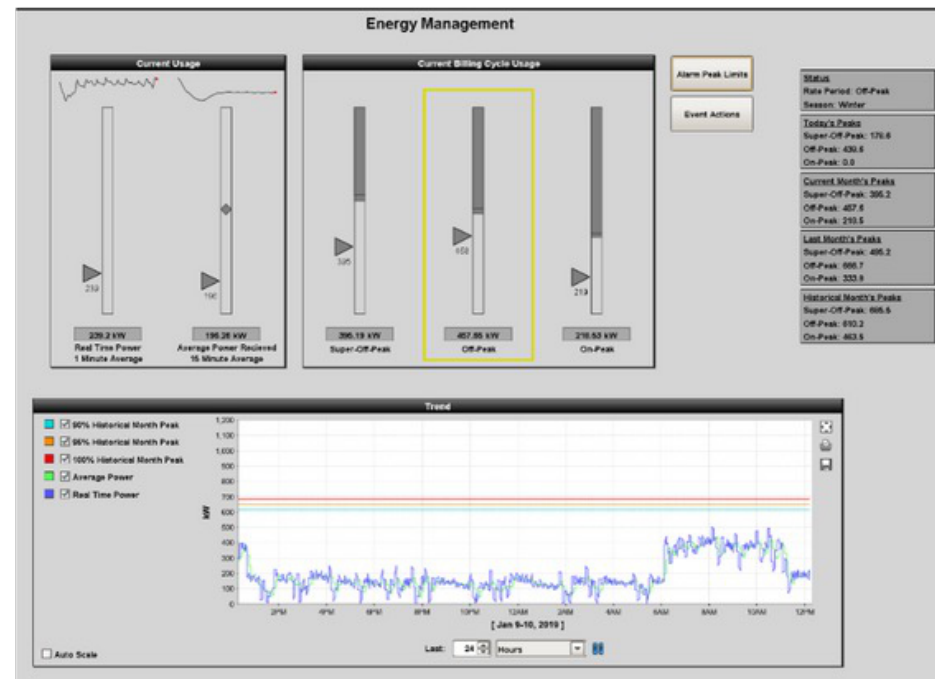

Water Delivery Optimization


Integration of software and hardware at water delivery pumping, storage, or treatment facilities that enable the integration and transmission of data from energy meters directly or indirectly into Supervisory Control and Data Acquisition (SCADA).



Reducing Peak Energy Consumption

This demonstration project highlights a pathway for water agencies in California to reduce their peak energy consumption substantially with no decrement in service or reliability.

The project also identifies "real world" implementation issues that have not emerged in previous proof-of-concept research.

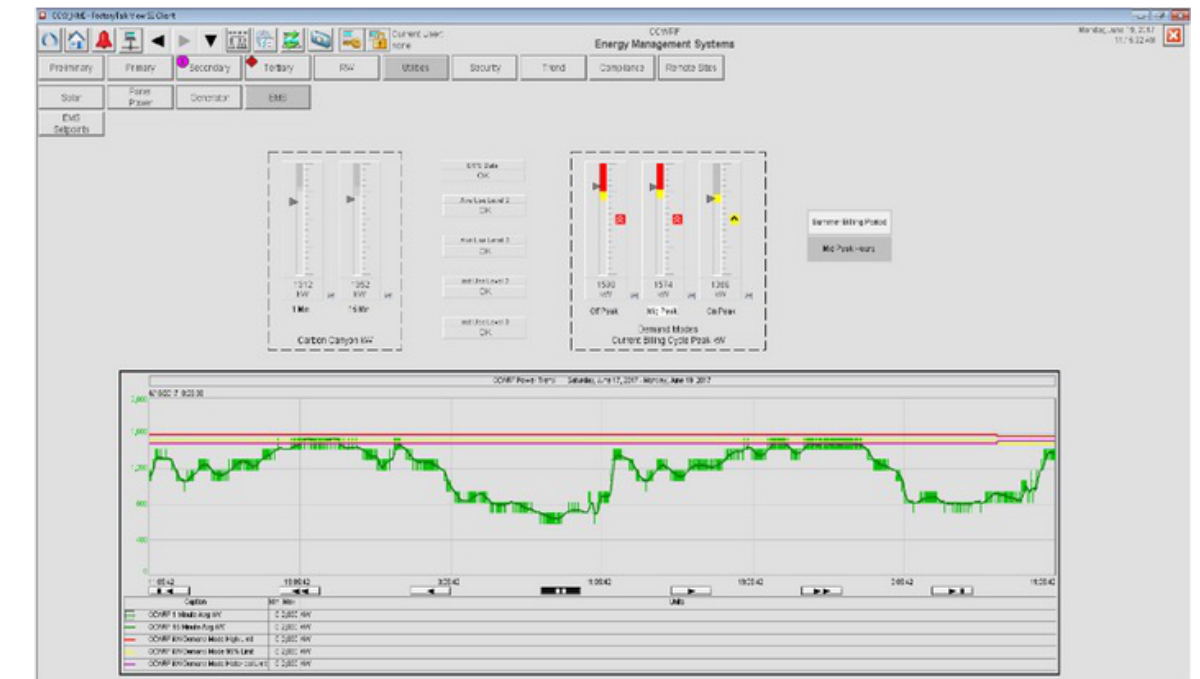

Individual SCADA System Integration

Combined with historical energy use integrated with real time SCADA control displays, operators can manage systems in real time to monitor and control peak demand.

Real time energy usage monitoring provides both instantaneous and 15 min average relative to Time of Use (TOU) rate schedules, and alarm notifications optimized to provide operators with real time energy demand and the current existing peak load that has been recorded to date.

Water Energy Nexus

UC Riverside

Technology Type	Technology Capabilities
Water Technologies	<ul style="list-style-type: none">• Energy Management System (EMS): Customized Development and Validation
Water Technologies	<ul style="list-style-type: none">• Supervisory Control and Data Acquisition (SCADA): Customized Development and Validation
Water Technologies	<ul style="list-style-type: none">• Real-Time Monitoring System Software and Sensors: Development, Testing, and Validation

APL: Atmospheric Processes Laboratory

UC Riverside

Address

CE-CERT
1084 Columbia Ave.
Riverside, CA 92507


Point of Contact

David Cocker
P: 951-781-5791
E: dcocker@engr.ucr.edu




UCR has a state-of-the-art environmental chamber facility designed to study atmospheric chemistry and particle formation. The facility also provides an ideal platform to study removal efficiencies of indoor air treatment systems including energy efficient HVAC systems; removal efficiencies of various surface treatments; evaluation of indoor/outdoor sensors and emerging technologies.

This unique facility is equipped with state of the art instrumentation for online and offline detailed measurement of hazardous air pollutants, greenhouse gases, and ultrafine particulate matter. A suite of gas chromatographs (1D and 2D), mass spectrometers, particle, specialized air analyzers, and devices for particle number, size, composition, density, morphology, volatility, and hygroscopicity are all available for characterization of air contaminants including their formation and removal mechanisms.

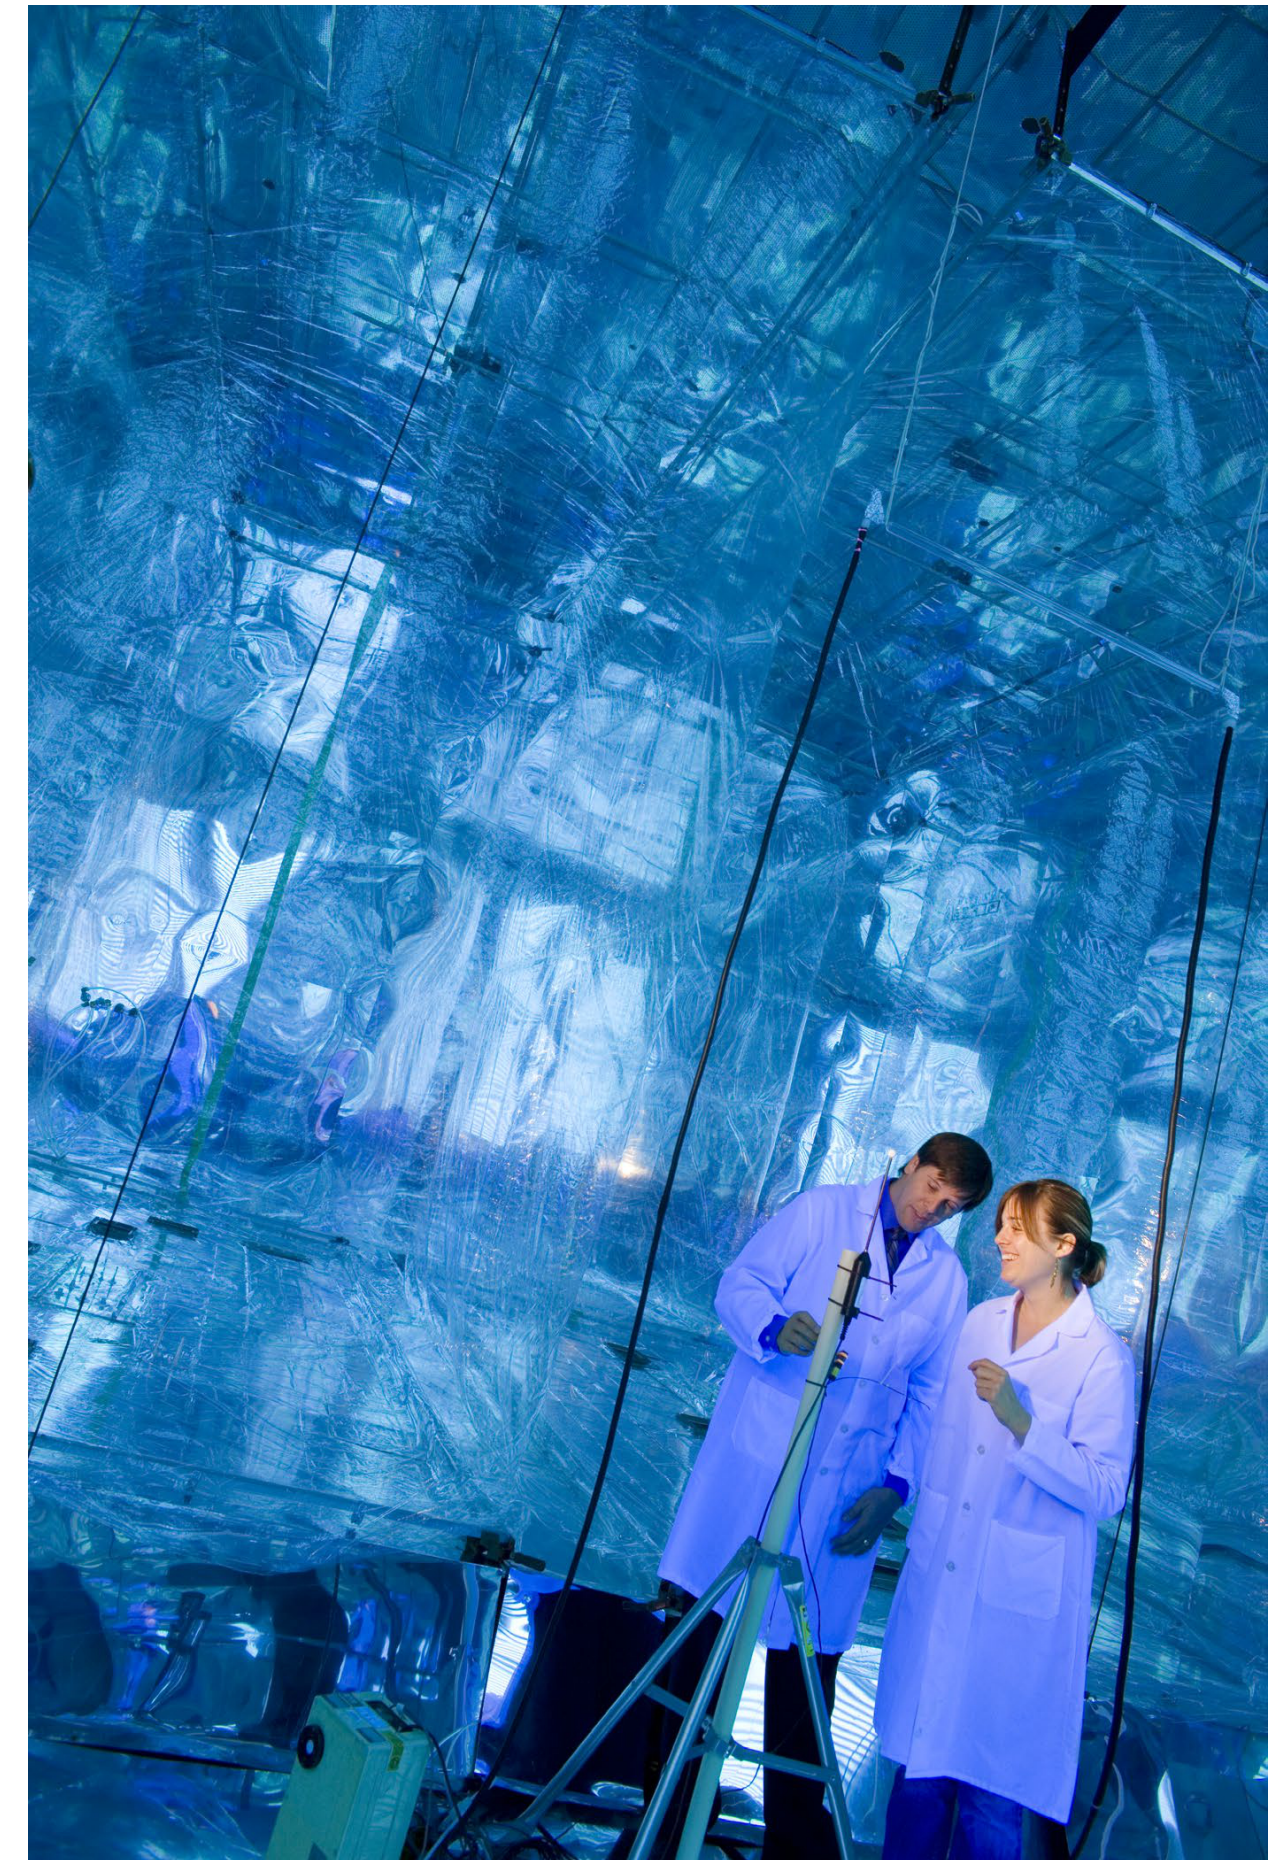

APL: Atmospheric Processes Laboratory

UC Riverside

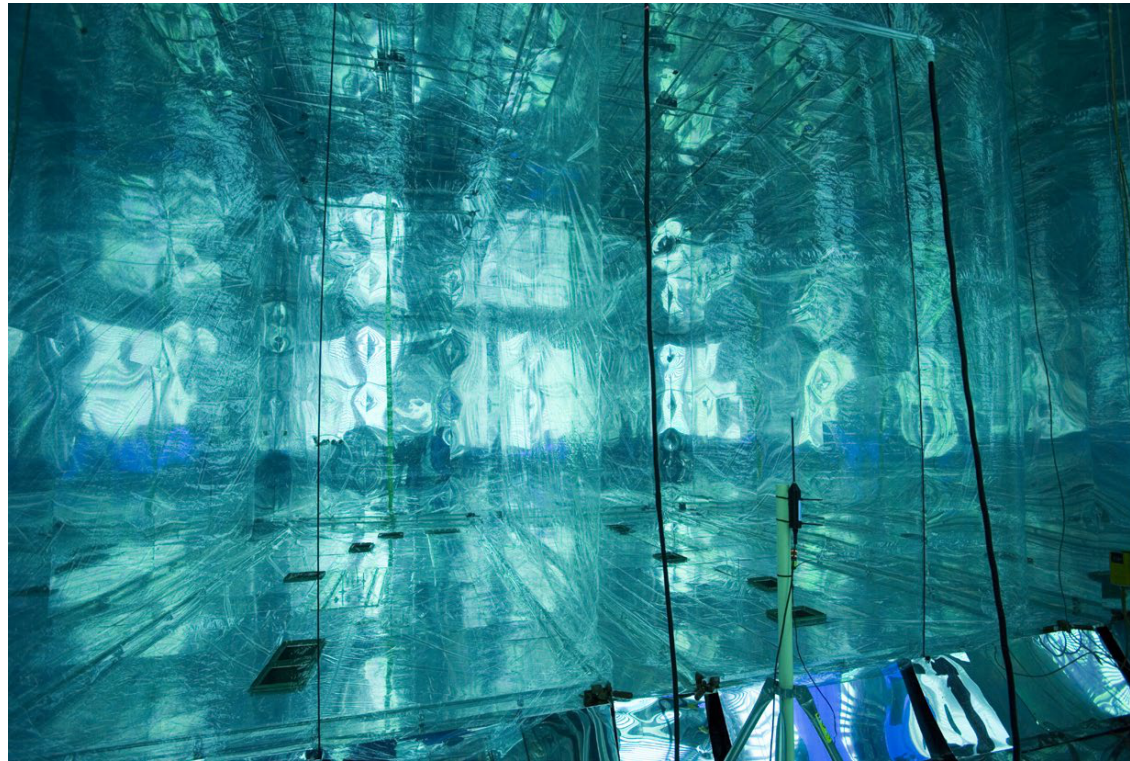

Large environmental chamber

- Includes one 125 m³ Teflon chamber, dual 12 m³ Teflon chambers
- 16000 ft³ Temperature (5–45 °C), light, and humidity controlled room
- Capability to flush control room with purified air and use as test bed itself



Mid scale environmental chamber

- 35 m³ environmental chamber
- Idealized for simulating atmospheric processes of emissions from major sources (e.g., woodsmoke, agriculture, internal combustion engine)
- Test platform for evaluating instrument performance in complex systems and efficacy of control technologies



Mobile environmental chamber system

- 20 m³ environmental chamber on wheels
- Can be moved outside or to test source to capture specific emissions and then simulate atmospheric processing of these sources
- Built for complimentary testing of vehicle emissions in other CE-CERT test labs

APL: Atmospheric Processes Laboratory

UC Riverside

Technology Type	Technology Capabilities
Building Technologies	Environmental Chambers: Suite of environmental chambers to suit test needs ranging from large temperature and humidity controlled systems to portable chambers. Can be used for simulation of atmospheric chemistry (indoor or outdoor) or to provide an environment to test performance of air purifiers or HVAC systems. Chambers range in size from 10 L to 130000L with additional possibilities of using the light, humidity and temperature controlled humidity sealed enclosure (~16000 ft3) for additional systems testing.
Building Technologies	Aerosol instrumentation suite: Particle size distribution, particle number, volume, size, morphology, chemical composition (including detailed organic and inorganic composition), particle volatility, and particle hygroscopicity. The suite also includes aerosol mass spectrometer, EC/OC analyzer, trace element analyzer, ion chromatography, and one and two dimensional gas chromatography with flame ionization detectors and mass spectrometers.
Grid Technologies	Gas-phase instrumentation suite: Includes trace level ozone, NO _x , SO _x , carbon monoxide, and carbon dioxide concentrations, detailed hydrocarbon composition, hazardous air pollutants, and greenhouse gases

UC San Diego

Powell Structural Engineering Research Laboratories

UC San Diego

Address

Matthews Lane
La Jolla, CA 92093

Ombudsperson

Jan Kleissl
Director,
UCSD Center for Energy Research


P: 619.376.3971

E: jkleissl@ucsd.edu

W: <https://se.ucsd.edu/facilities/structural-systems-laboratory>



The Powell Structural Testing facilities are among the largest and most active, full-scale structural testing facilities in the world. They can be used to study the performance of buildings, bridges, foundations, wind turbines, and other energy storage or generation structures subjected to earthquake and other extreme load conditions; structural protective systems; performance of civil, aerospace, and marine structures constructed of advanced composites and other innovative materials; and structural health monitoring and prognosis technologies.

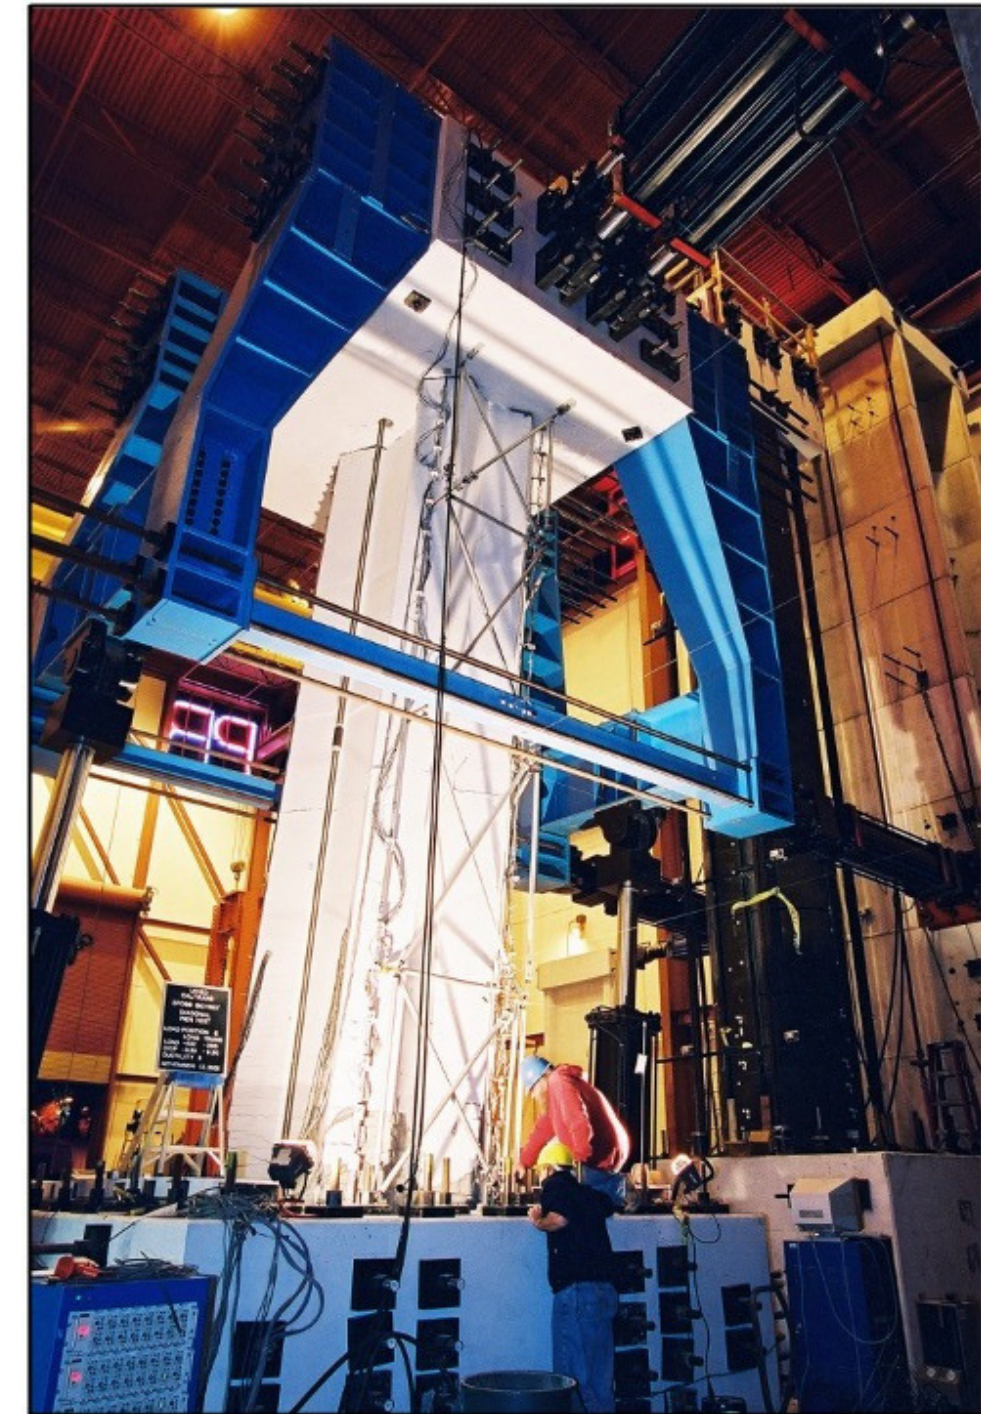

Powell Structural Engineering Research Laboratories

UC San Diego



Powell Structural Engineering Research Laboratories

UC San Diego

Technology Type	Technology Capabilities
Building Technologies	<ul style="list-style-type: none">• Structural testing
Energy Storage	<ul style="list-style-type: none">• Earthquake and blast testing

Geomechanics Laboratory for Bentonite Buffers for Radioactive Waste Repositories

UC San Diego

Address

Matthews Lane
La Jolla, CA 92093

Ombudsperson

Jan Kleissl
Director,
UCSD Center for Energy Research


P: 619.376.3971

E: jkleissl@ucsd.edu

W: <https://mccartney.eng.ucsd.edu/research>





The objectives of the geomechanics lab are to (1) characterize the effects of high temperatures (up to 200°C) on the mechanisms and material properties governing coupled heat transfer, water flow, and volume change in unsaturated, compacted granular bentonite, and to (2) understand and simulate the multiphase hydration process of bentonite buffers in deep geological repositories with closely spaced waste packages or dual purpose Containers.

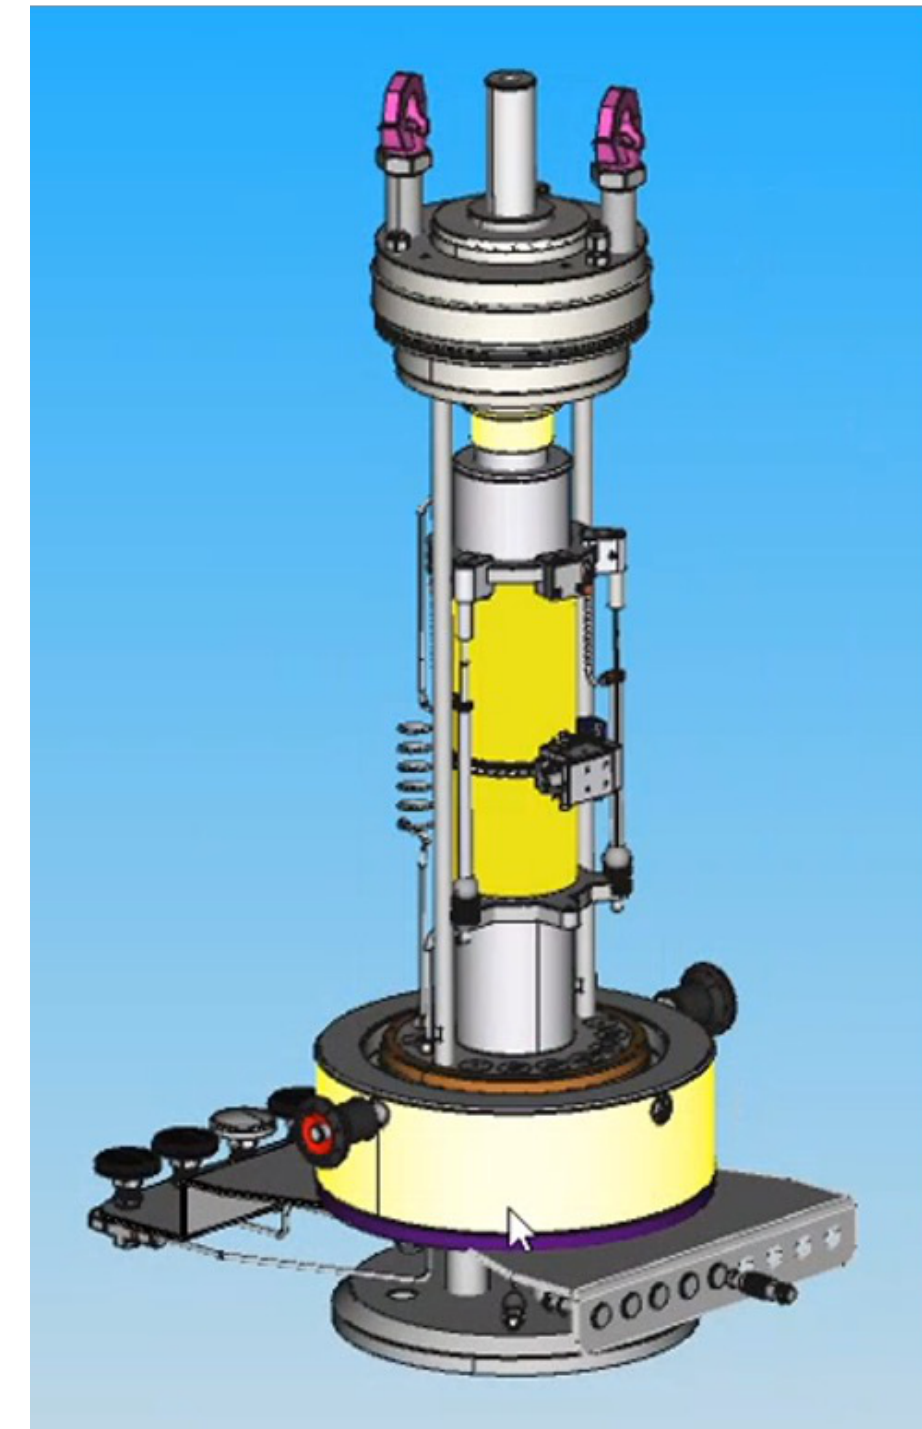

Geomechanics Laboratory for Bentonite Buffers for Radioactive Waste Repositories

UC San Diego

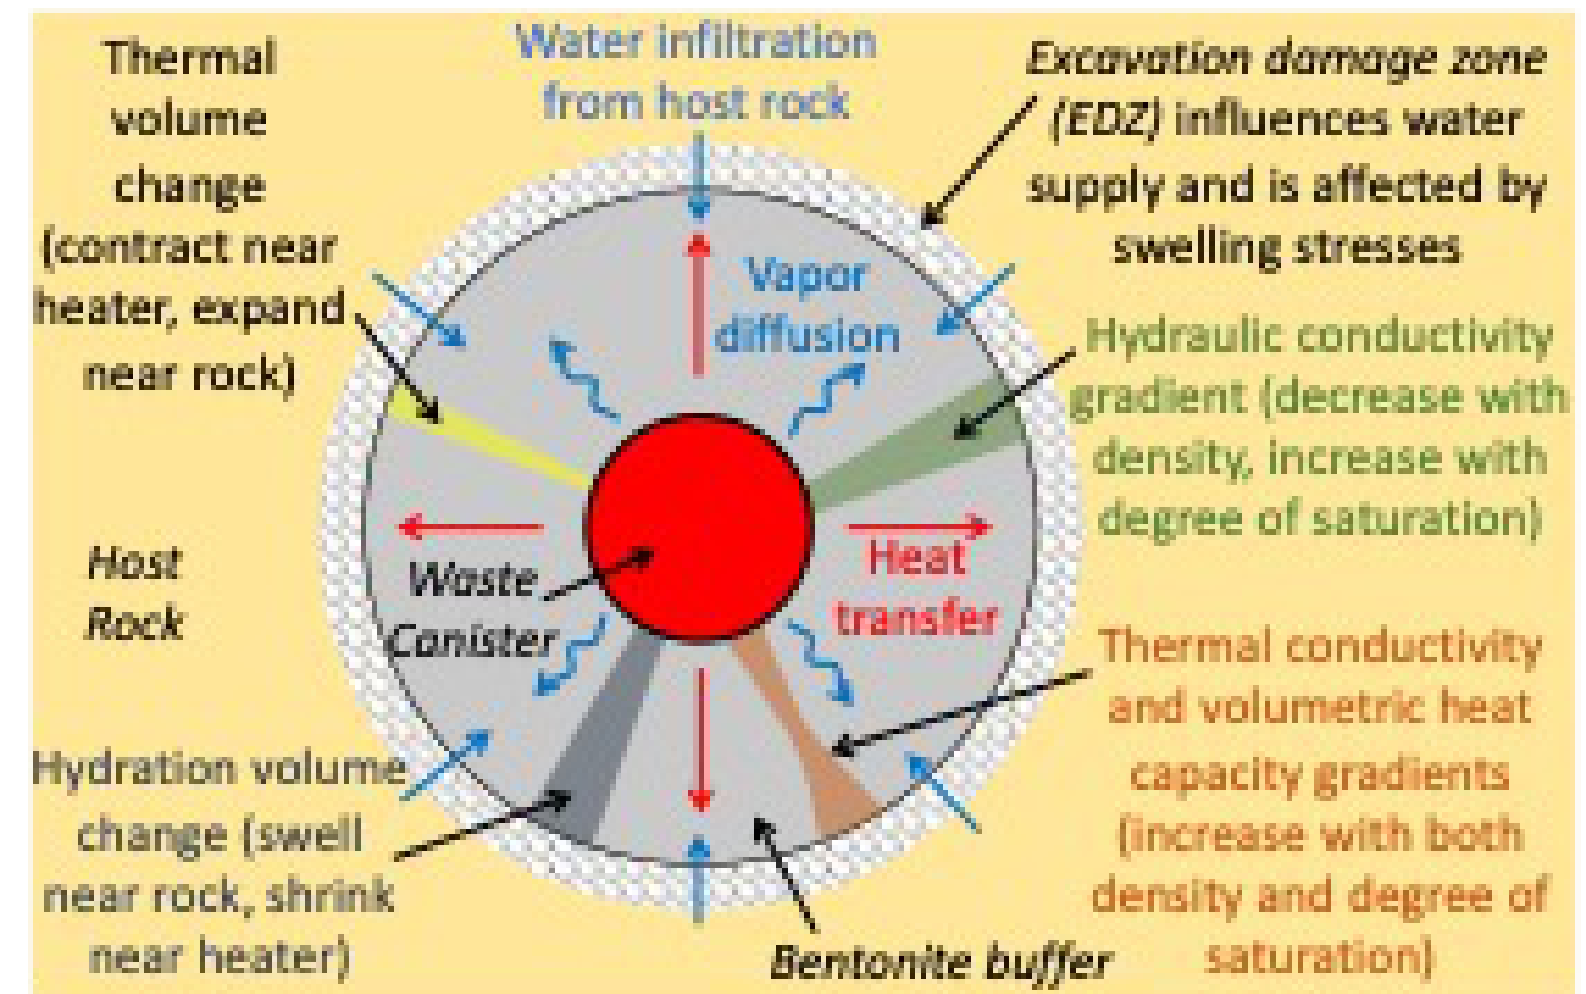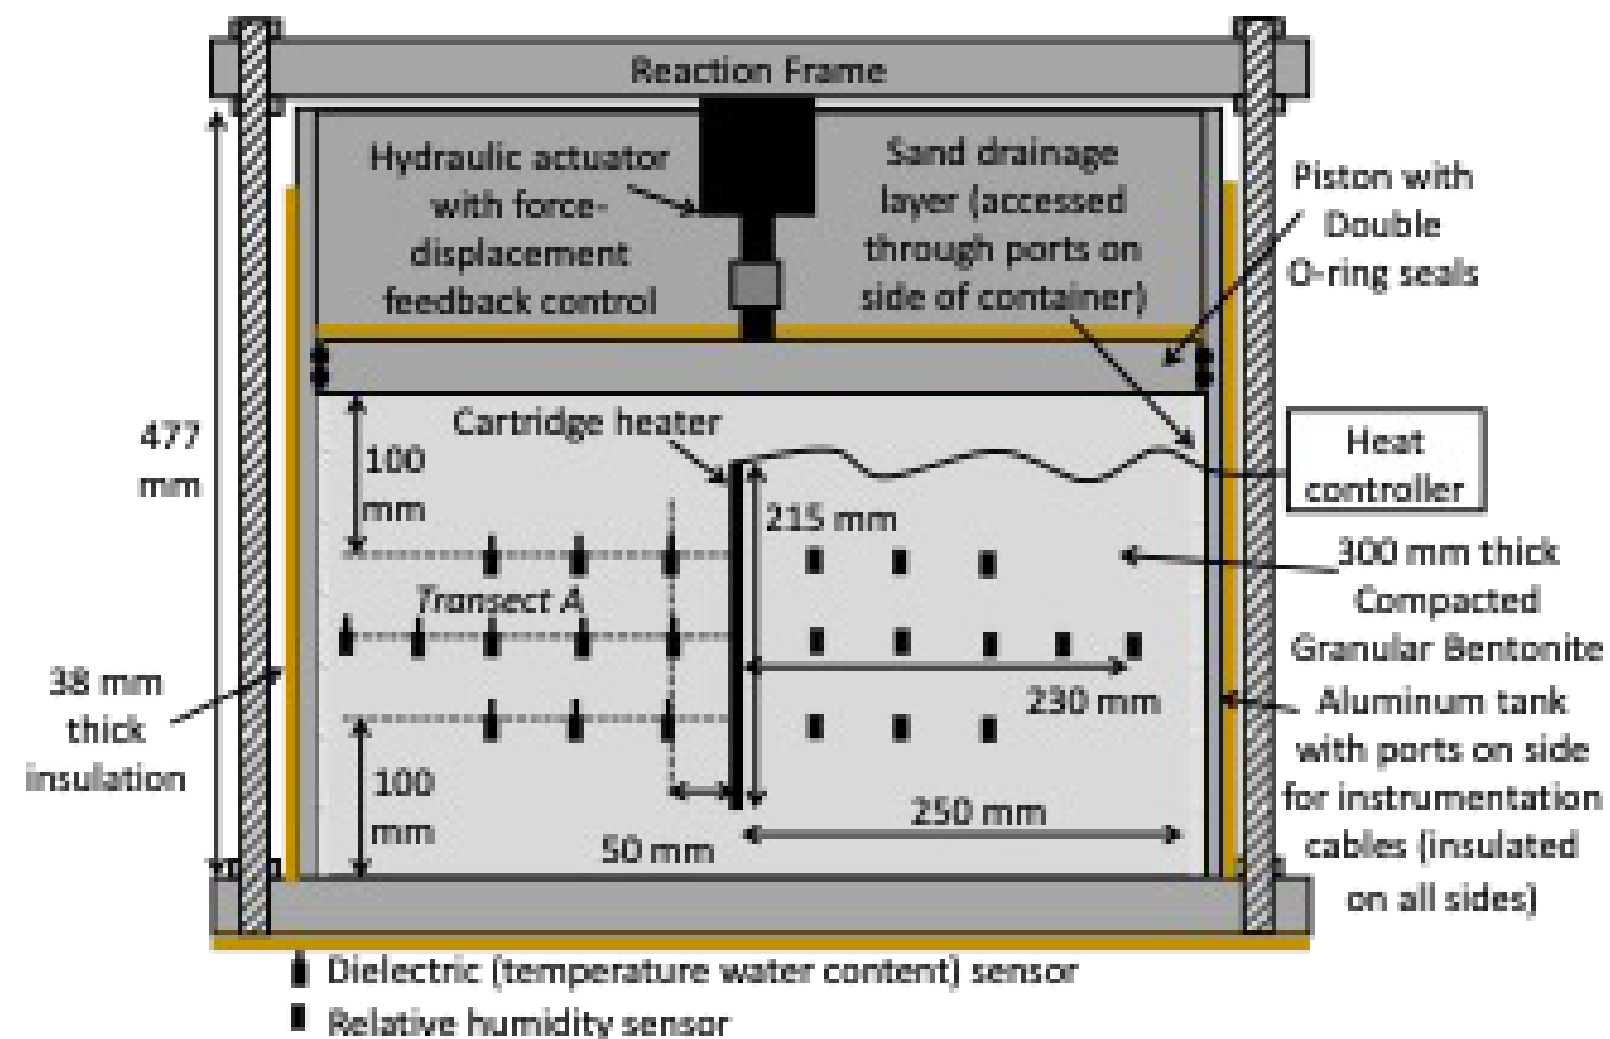

Geomechanics Laboratory for Bentonite Buffers for Radioactive Waste Repositories

UC San Diego

Technology Type	Technology Capabilities
Material-Based	<ul style="list-style-type: none">• Geomechanics

Full Scale Geothermal Borehole Array for Storage of Solar Thermal Energy

UC San Diego

Address

Matthews Lane
La Jolla, CA 92093

Ombudsperson

Jan Kleissl
Director,
UCSD Center for Energy Research



P: 619.376.3971

E: jkleissl@ucsd.edu

W: <https://mccartney.eng.ucsd.edu/research>



This full-scale geothermal energy storage system contains an array of 13 closely-spaced borehole heat exchangers and temperature measurements. This facility can be used to investigate different fluid control mechanisms and solar thermal panels (including co-generation systems) on the subsurface thermal energy storage.

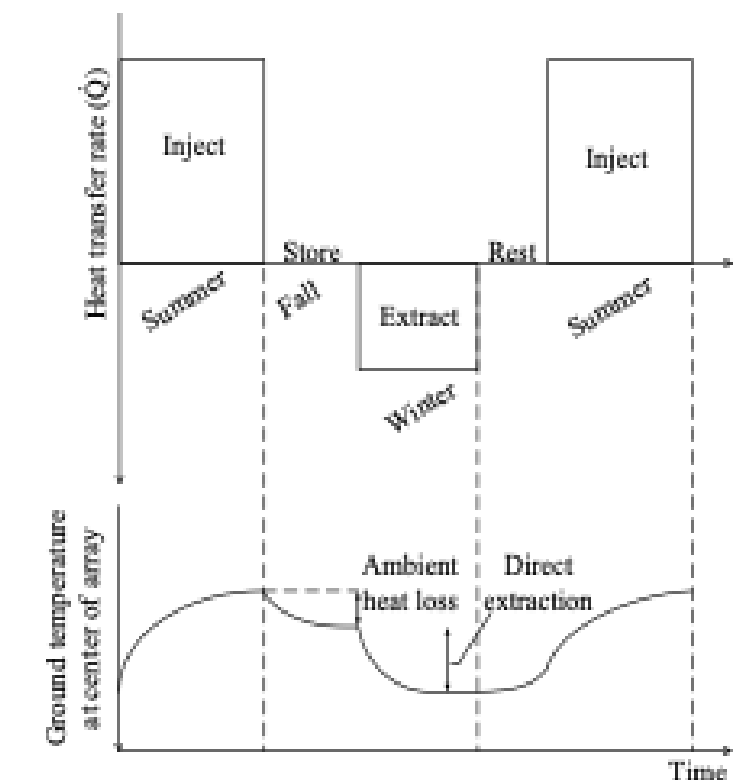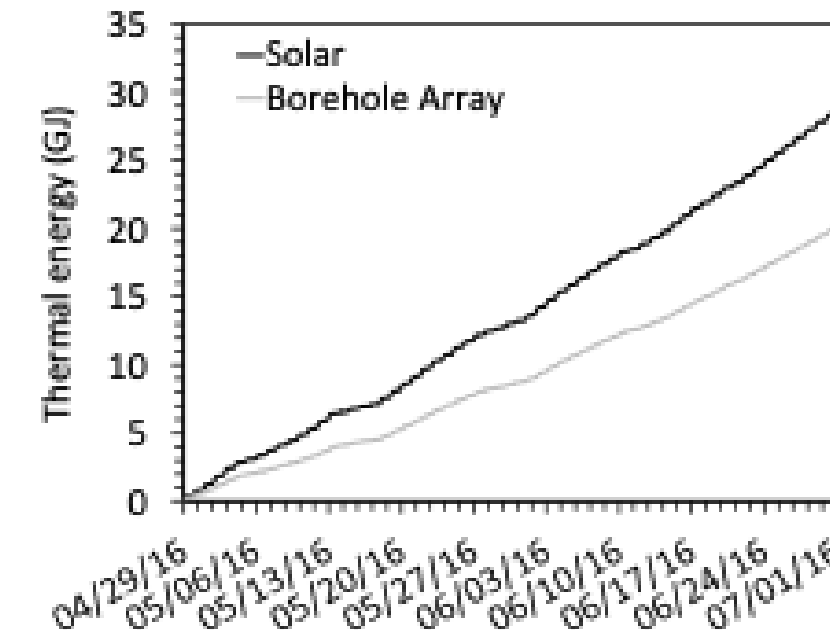

Full Scale Geothermal Borehole Array for Storage of Solar Thermal Energy

UC San Diego

Technology Type	Technology Capabilities
Renewable Generation	<ul style="list-style-type: none">• Solar Thermal
Energy Storage	<ul style="list-style-type: none">• Thermal energy storage in the soil

Geotechnical Centrifuge for Energy Geotechnics Applications

UC San Diego

Address

Matthews Lane
La Jolla, CA 92093

Ombudsperson

Jan Kleissl
Director,
UCSD Center for Energy Research

P: 619.376.3971

E: jkleissl@ucsd.edu

W: <https://se.ucsd.edu/facilities/geotechnical-facilities>



The geotechnical centrifuge allows studying the effects of thermal expansion and contraction on soil-structure interaction, as well as the effects of temperature on the thermo-hydro-mechanical behavior of the surrounding soil. Energy geotechnics applications such as energy piles and foundations for energy infrastructure can be tested.



Geotechnical Centrifuge for Energy Geotechnics Applications

UC San Diego

Technology Type	Technology Capabilities
Renewable Generation	<ul style="list-style-type: none">• Energy piles, foundations for energy infrastructure

Smart Inverter Testing Lab

UC San Diego

Ombudsperson

Jan Kleissl

Director,

UCSD Center for Energy Research

P: 619.376.3971

E: jkleissl@ucsd.edu





The smart inverter testing lab includes PV and Grid Simulators that can simulate virtually any power grid disturbance and PV array up to 30 kW. The test setup includes high speed data acquisition with high power and voltage monitoring capabilities, and the Sunspec Validation Platform (SVP) software for controlled testing and performance analysis of CA Rule 21 advanced inverter functions. SD



Smart Inverter Testing Lab

UC San Diego

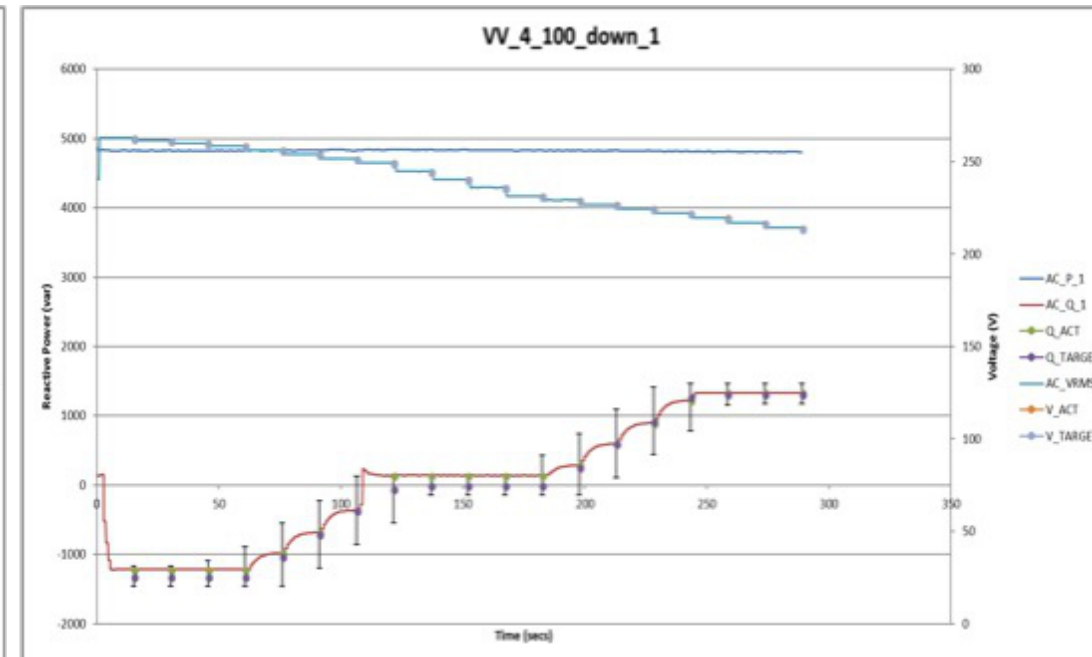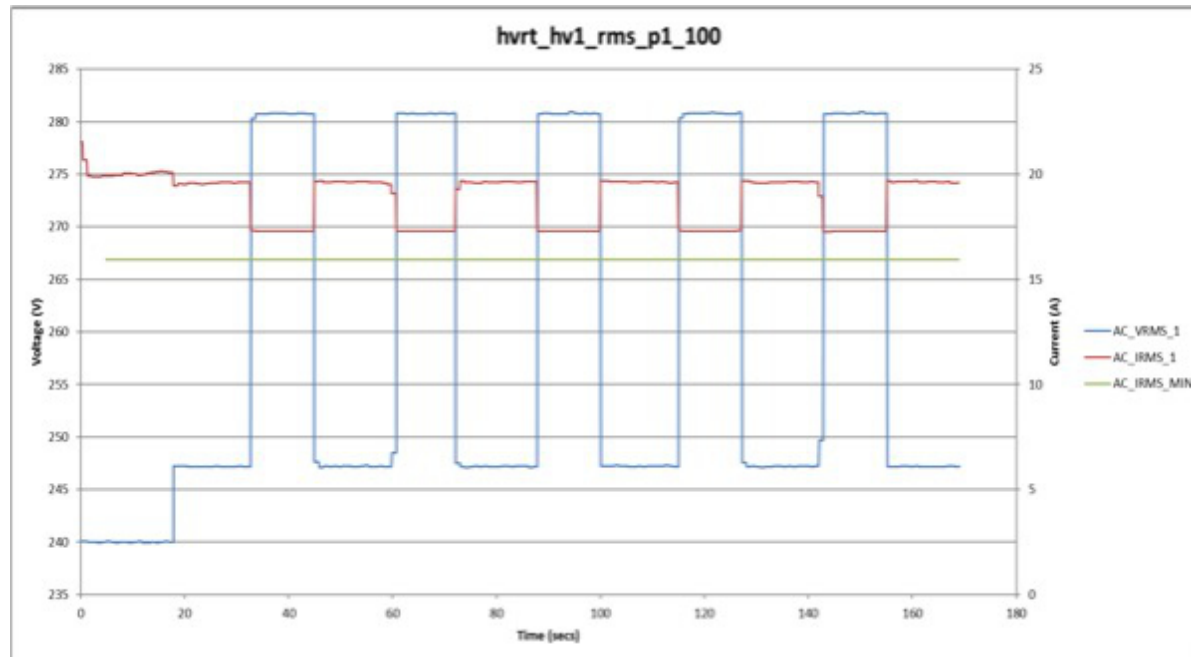

Smart Inverter Testing

The Smart Inverter Lab can test and evaluate single-phase and 3-phase inverters up to 30 kW capability under a wide variety of simulated real-world scenarios. The testing is based on CA Rule 21 standards, is automated and repeatable. Approximately a dozen of the first generation of smart inverters, from several different manufacturers, have been tested under the CEC project to date.

Grid Support

Advanced functions and capabilities allow smart inverters to perform grid support functions, such as Volt-VAR support. As the grid voltage deviates from nominal (typically 240 VAC at the inverter) the inverter can inject or absorb reactive power to help regulate the voltage. The power factor of the inverter output can be programmed for fixed support, and power ramp rates modified to minimize impact on the grid during power changes.

Smart Inverters Testing

The Smart Inverter Lab can test and evaluate single-phase and 3-phase inverters up to 30 kW capability. The testing is based on CA Rule 21 standards, is automated and repeatable. Approximately a dozen of the first generation of smart inverters, from several different manufacturers, have been tested under the CEC project to date.

Battery Energy Storage Systems – Utility Scale

UC San Diego

Ombudsperson

Jan Kleissl

Director,

UCSD Center for Energy Research

P: 619.376.3971

E: jkleissl@ucsd.edu



Through CHARGES, the DOE ARPA-e designated UC San Diego as one of two national facilities for testing of new advanced energy storage technology, including: platforms for cell level, module level, and full-scale grid-connected testing; grid-connected outdoor test platform to test three systems; and remote monitoring and testing capability.



Battery Energy Storage Systems – Utility Scale


UC San Diego



Energy Storage

Through ARPA-E CHARGES program, the U.S. DOE designated UC San Diego as one of two national facilities for testing advanced energy storage technology, including: platforms for cell level, module level, and full-scale, MW-level grid-connected testing.

- Conduct testing, data acquisition and analysis – Commercialization
- Solar and Load Forecasting Integration with Energy Storage Systems

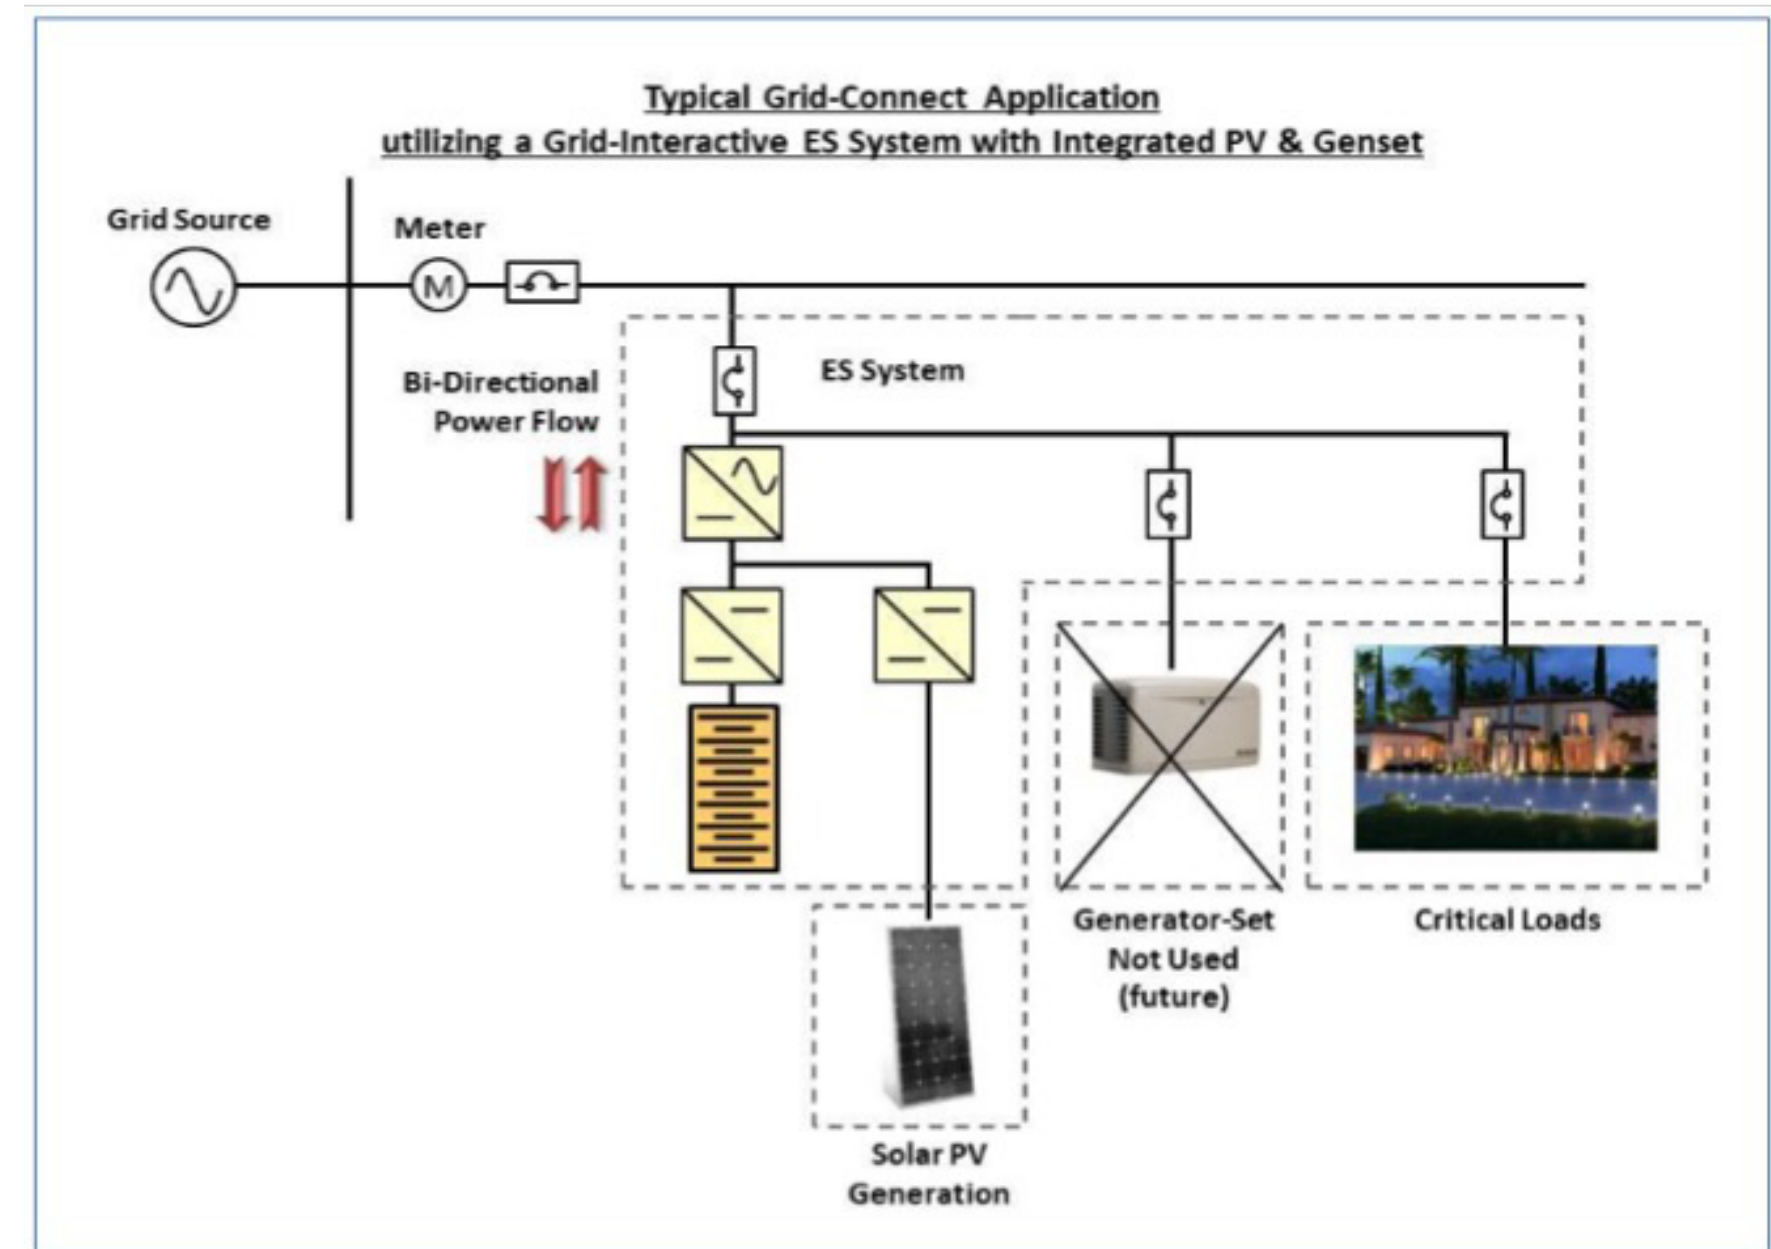

Battery Energy Storage Systems – Module Level

UC San Diego

Test Lab Director

Antoni Tong
Senior R&D Engineer, Center for Energy Research
E: stong@ucsd.edu

Ombudsperson

Jan Kleissl
Director, UCSD Center for Energy Research
P: 619.376.3971
E: jkleissl@ucsd.edu



Through the support of DoE ARPA-E CHARGES program and other state and federal grants, UC San Diego is providing third party testing and validation of grid storage technologies, leveraging its experience in battery testing, economic modeling, grid-connected validation to identify the market-ready energy storage solutions for the future utility grid, and to maximize performance and benefit of energy storage systems.



Energy Storage Systems Module Testing Lab

- Comprehensive testing setup for indoor implementation environment
- A fleet of bi-directional battery testers ranging from 5V/60A, 80V/200A, 100V/100A and 400V/400A for testing of a variety of battery modules
- 480 VAC three phase power interfaces, and 240 VAC split phase power interfaces for testing of inverter integrated battery modules
- Equipped with advanced communication, controllers, signal processing and data acquisition equipment for battery control and management
- Advanced lab safety including a hydrogen alarm system, fire suppression, temperature and humidity monitoring, and enhanced ventilation

Battery Energy Storage Systems – Module Level

UC San Diego




Energy Storage Market Dispatch and Optimization

California energy market based energy storage application modeling and demonstration. We can perform over five energy storage applications backed by real-world market data:

- Day-ahead energy time shifting
- Real-time energy time shifting
- Flexible ramping
- Frequency regulation
- Demand charge management

We can conduct testing of both single service and stacked service applications with advanced forecasting algorithm and model based dispatch optimization.

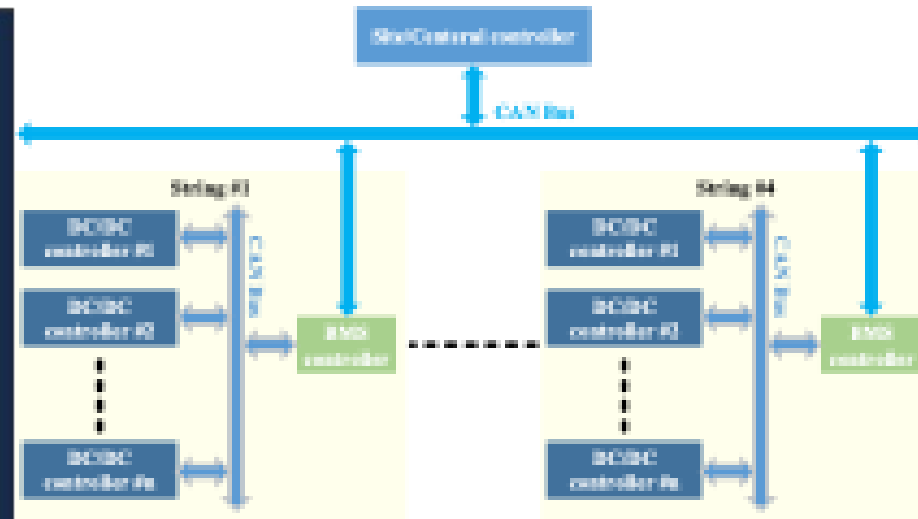

Advanced Battery Integration and Management

Fully integrated test setup with four CAN communication equipped testers and inverters, five commercial grade battery management systems, 16CH high frequency data acquisition systems, and the capability to custom build power electronics and embedded controllers offers innovators to setup robust hardware-in-loop testing, helping validate and test integrated battery solutions or their sub-components such as controller, BMS, and power converters.




Robust Testing Capabilities from Battery Cells to Systems

A board range of battery testing equipment:

- 5V 60A 16-channels Arbin tester
- 80V 200A Rexgear battery testers (2CH)
- 100V 100A Digatron battery testers (5 CH)
- 400V 150A Rhombus Inverter
- 400V 400A Arbin battery tester

Depending on different levels of commercial maturity, innovators will be able to choose a suitable equipment for comprehensive cell/ module/ system testing and valuation.

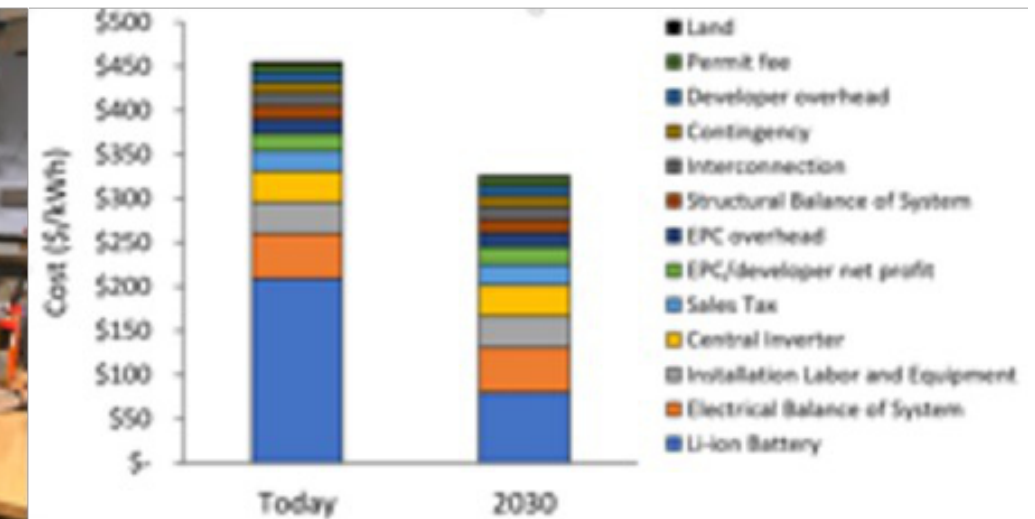

Energy Storage Economic Modeling and Valuation

Expertise in energy market analysis and techno-economic modeling. We can help energy storage innovators to better understand capital and operational cost of their solutions at scale, and further understand their product's revenue potential in a progressing energy market, in order to provide valuable insight for making strategic investment in their technology and developing go-to-market strategies.

Nanotechnology Infrastructure

UC San Diego

Test Lab Director

Yuhwa Lo
Director,
San Diego Nanotechnology Infrastructure

P: 858.822.3429

E: vlo@ucsd.edu

W: <http://sdni.ucsd.edu>

Ombudsperson


Jan Kleissl
Director,
UCSD Center for Energy Research

P: 858.376.3971

E: jkleissl@ucsd.edu




The San Diego Nanotechnology Infrastructure (SDNI), part of the NSF supported National Nanotechnology Coordinated Infrastructure (NNCI), offers users from academic, industry and government laboratories open, affordable access to a broad spectrum of nanofabrication and characterization technologies and expertise that enable and accelerate cutting edge scientific research, proof-of-concept demonstration, device and system prototyping, product development, and technology translation. Centered on UCSD's Nano3 (Nanoscience, Nanoengineering, Nanomedicine) user facility, SDNI leverages additional specialized resources and expertise at UCSD for biomedicine, photonics, magnetics, energy, quantum systems, and converging sciences, enabling transformative research and education, and accelerating the translation of discoveries and new nanotechnologies to the marketplace.

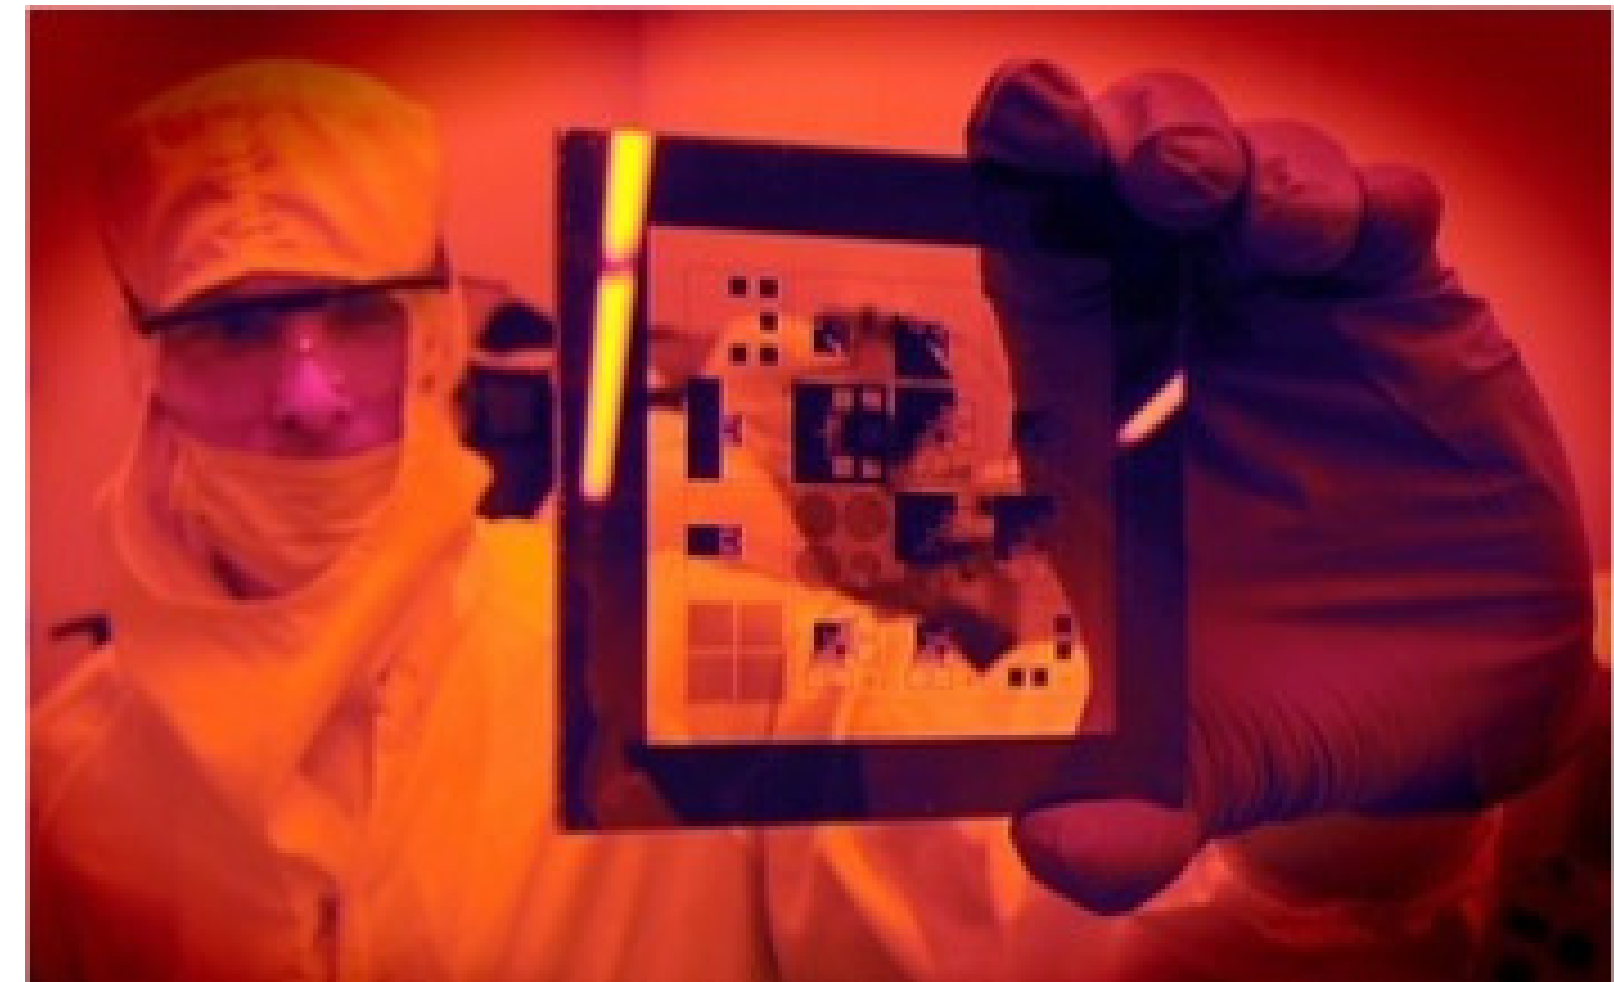

Nanotechnology Infrastructure

UC San Diego

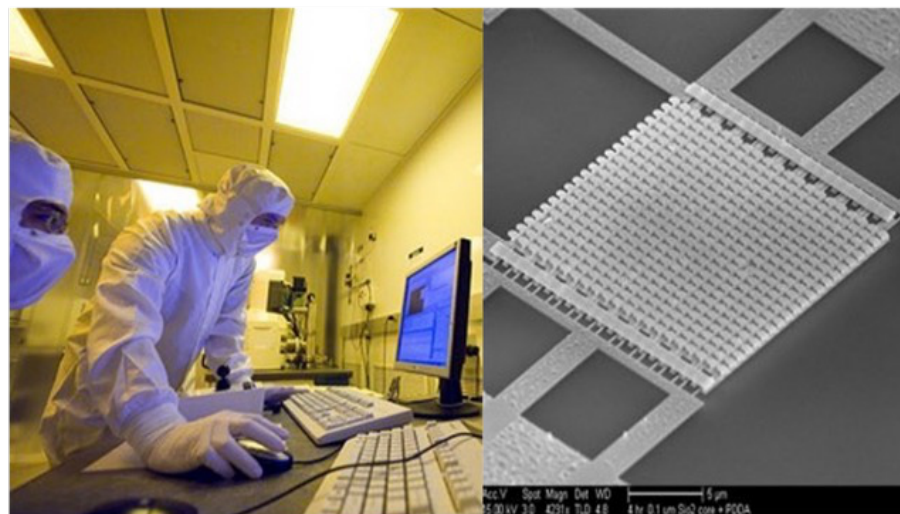


Nano3 Cleanroom Fabrication and Characterization Facility

Cleanroom device fabrication and materials characterization facility:

- Class 100/1000 cleanroom for lithography, materials deposition, etching, metrology
- State-of-the-art electron-beam writing capabilities
- Advanced microscopy capabilities, including several SEMs, FIB, TEM
- Highly trained and experienced staff available for support or direct fabrication services

(<https://nano3.calit2.net>)

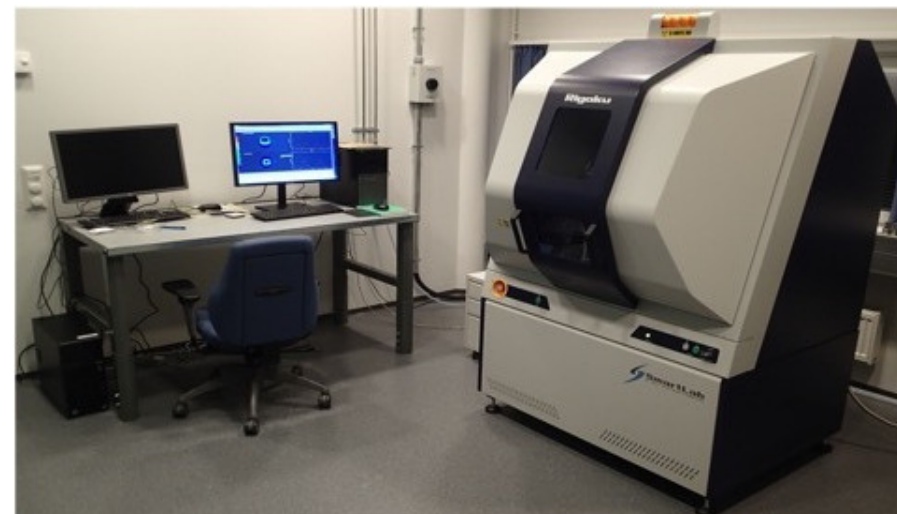

CMRR Materials Characterization Facility

The CMRR Materials Characterization facility provides access to an array of state-of-the-art equipment for nanomaterial (both thin-film and powder) characterization, including XRD, XPS, Hall effect, UV-Vis, AFM/MFM, SEM, and photo current systems to measure crystal structure, and magnetic, surface, transport, and optical properties.


(<https://cmrr.ucsd.edu/resources/Recharge%20Facility%20.html>)



Microfluidic Medical Device Facility

The Microfluidic Medical Device Facility provides a well-equipped facility with experienced staff to allow users to independently fabricate microfluidic devices and we offer foundry or contractual fabrication services. The facility can offer several unique capabilities and services, including metallization of microfluidic circuits, incorporation of small features with microfluidics, multi-layer microfluidics with active (valve/pump) components and more.

(<https://nano3.calit2.net/microfluidics/>)

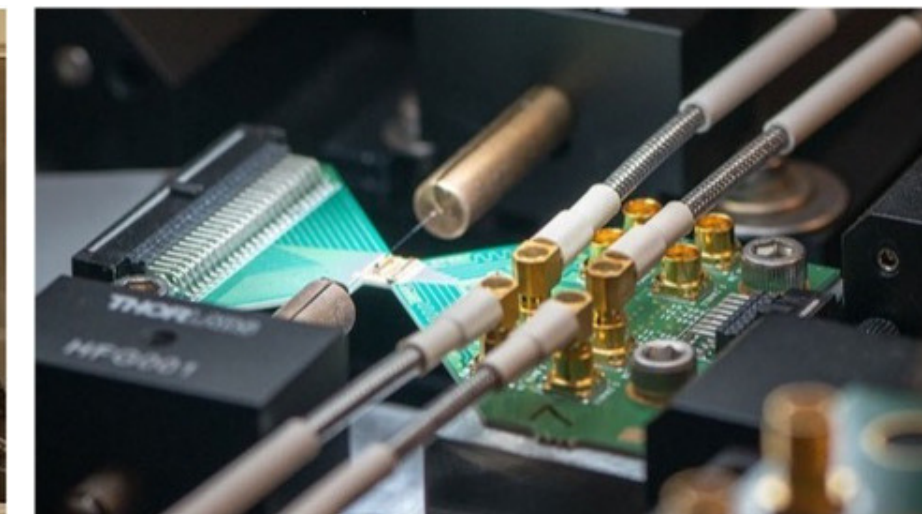

Chip-Scale Photonics Testing Facility

The Chip-scale Photonics Testing facility, connected to the UCSD data center testing system, enables real-time testing of developed devices and circuits in a realistic system application environment. The facility houses unique tools that allow external and internal users to measure the electrical/optical response of photonic devices and circuits. The equipment is highly integrated due to a custom cross-platform scripting framework and device drivers created by UCSD. All of the software is open source in order to better serve the facility users and the wider community.

(<https://sdni.ucsd.edu/chip-scale-photonics.php>)

Synchrophasor Grid Monitoring and Automation Lab (SyGMA Lab)

UC San Diego

Test Lab Director

Raymond de Callafon

Professor, Mechanical and Aerospace Engineering

E: callafon@ucsd.edu

Ombudsperson

Jan Kleissl

Director, UCSD Center for Energy Research

P: 619.376.3971


E: jkleissl@ucsd.edu

W: <https://sygma.sdsc.edu/>




Leverage technology on electric grid instrumentation, development of new data processing, modeling and model validation tools based on synchrophasor data for advanced grid monitoring and automatic control of electric networks.

The SyGMA lab fosters collaborations between industry, faculty and students at UCSD. With the displays, conference room and separate offices, the lab is a show case for industrial software (OSIsoft, NI) and research at UCSD.

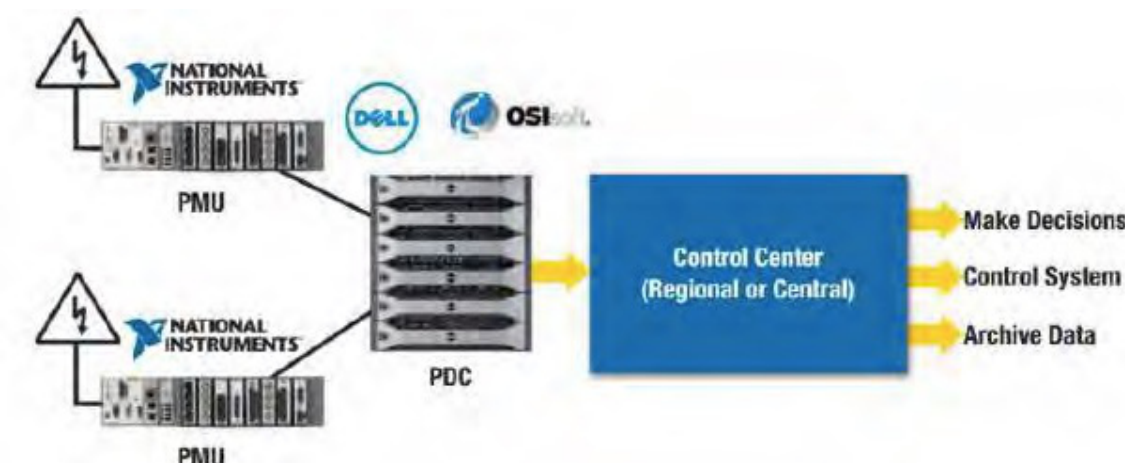

Synchrophasor Grid Monitoring and Automation Lab (SyGMA Lab)

UC San Diego

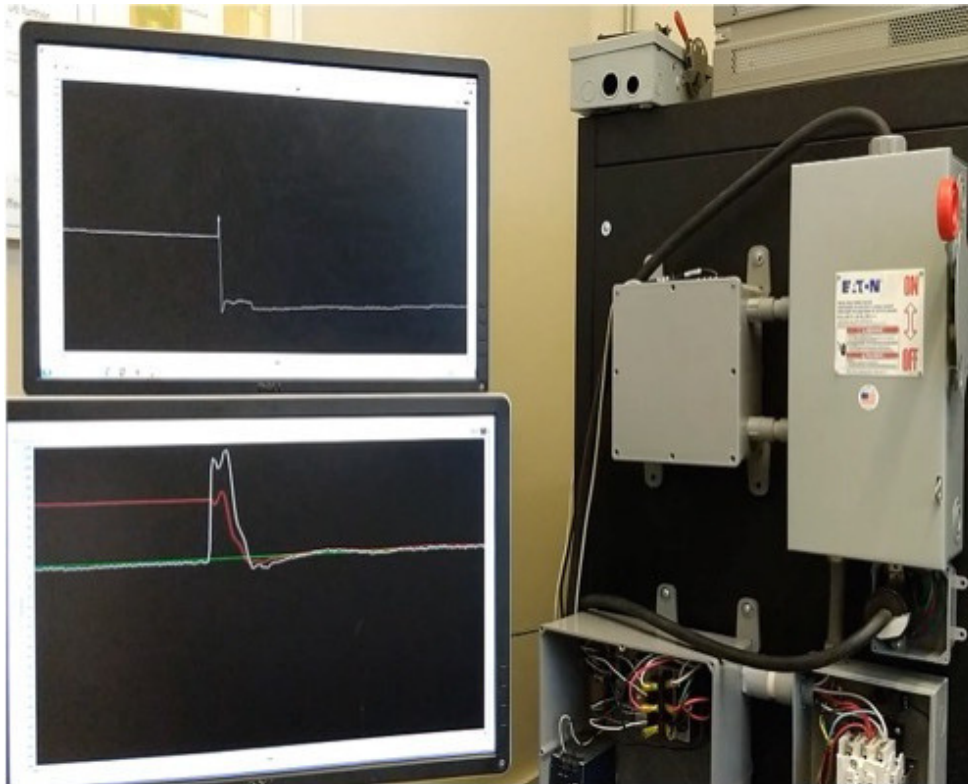

Dynamic (Micro)Grid Simulation

Three phase circuit simulation with synchrophasor data output and analog/digital DER inputs for Hardware-in-the-Loop simulation of DER and network dynamics.



Real-time 3 Phase Control

Three phase oscillatory circuit with islanding capabilities, one-cycle-control, programmable DC power supply and NI-cRIO hardware for control implementation.



Dedicated SEL Hardware

Industry leading Sweitzer Engineering Laboratories (SEL) hardware for synchrophasor data and real-time control implementation.

Solar Forecasting and Distribution System Integration

UC San Diego

Test Lab Director and Ombudsperson


Jan Kleissl

Director,


UCSD Center for Energy Research

P: 619.376.3971

E: jkleissl@ucsd.edu




Virtual environment for solar power integration into distribution feeders including complete specifications for 15 real distribution feeders with 1000s of buses each; output from 20 solar PV systems at high resolution; forecast algorithms and data from numerical weather prediction, machine learning, and sky imagery, and optimization algorithms.

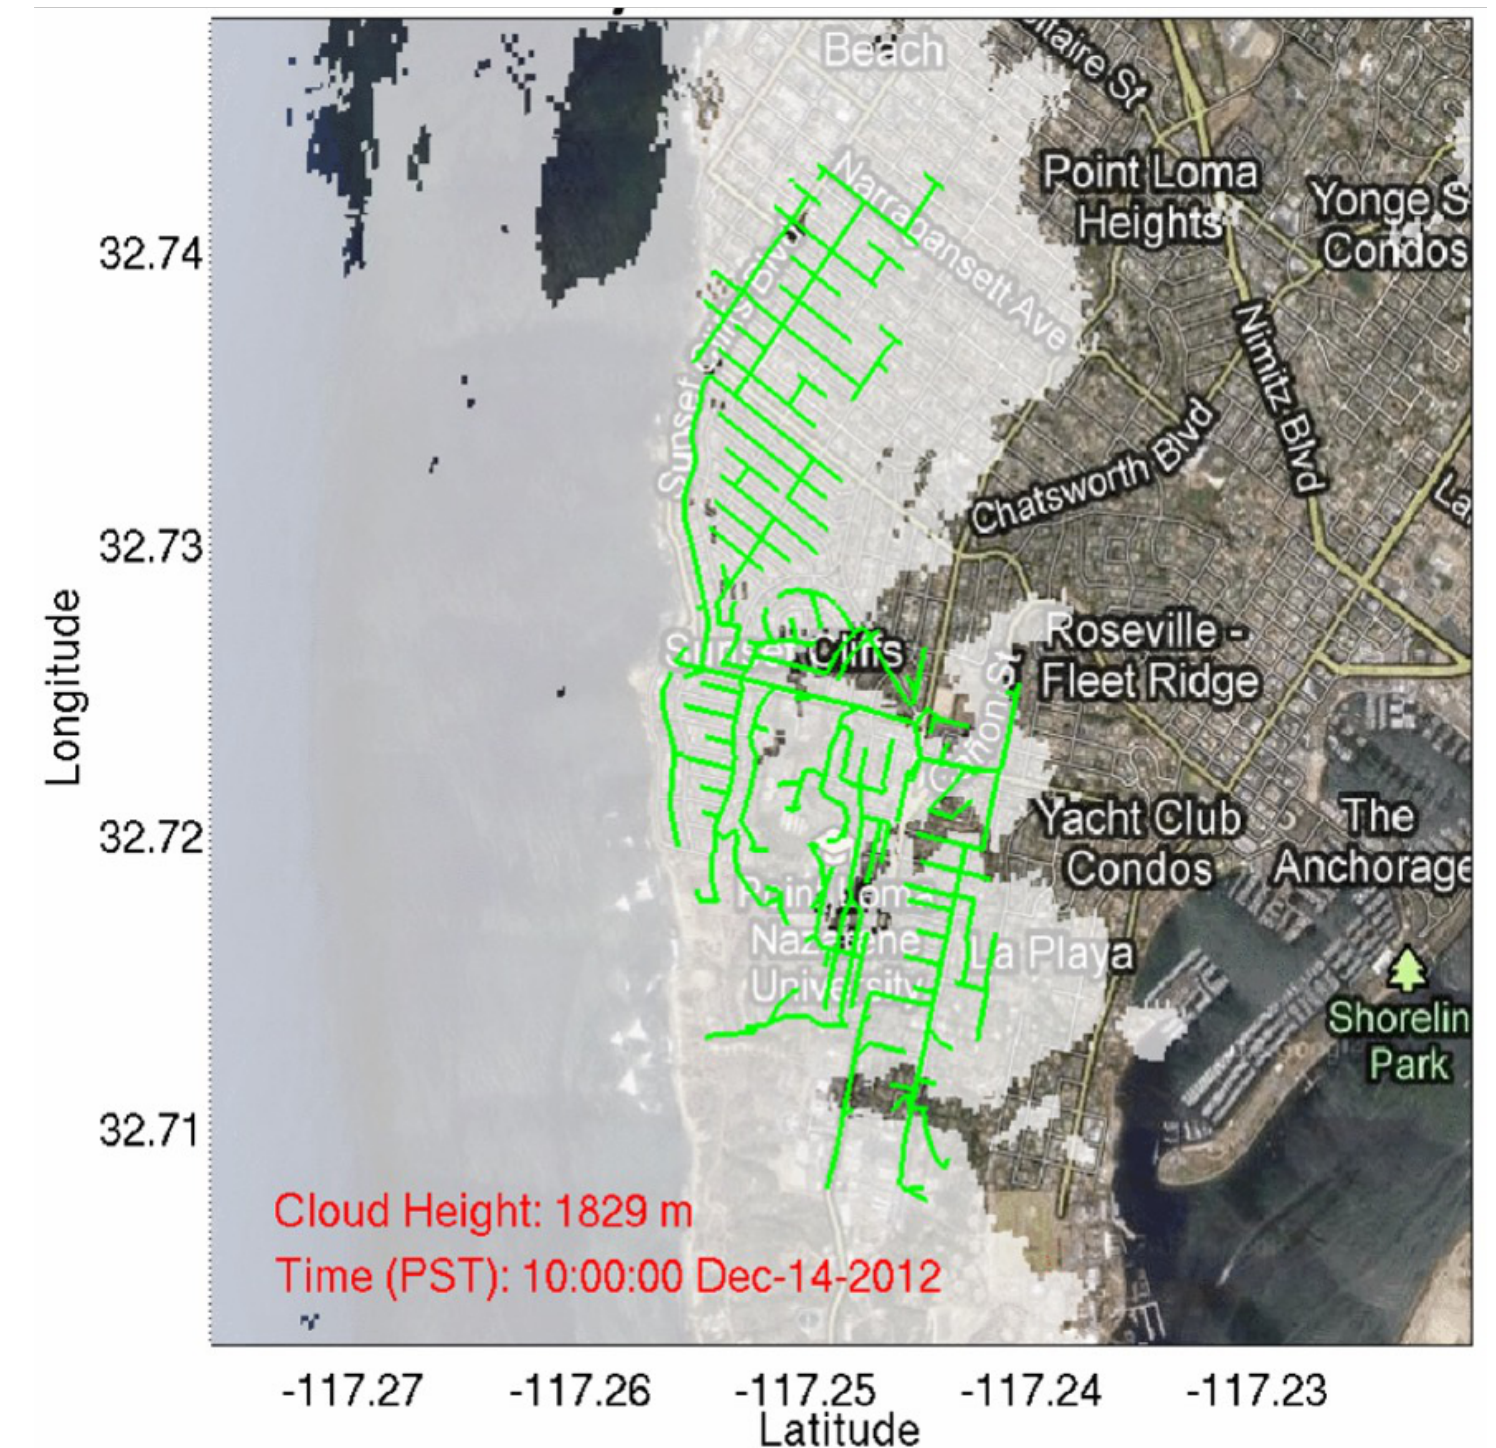


Solar Forecasting and Distribution System Integration

UC San Diego

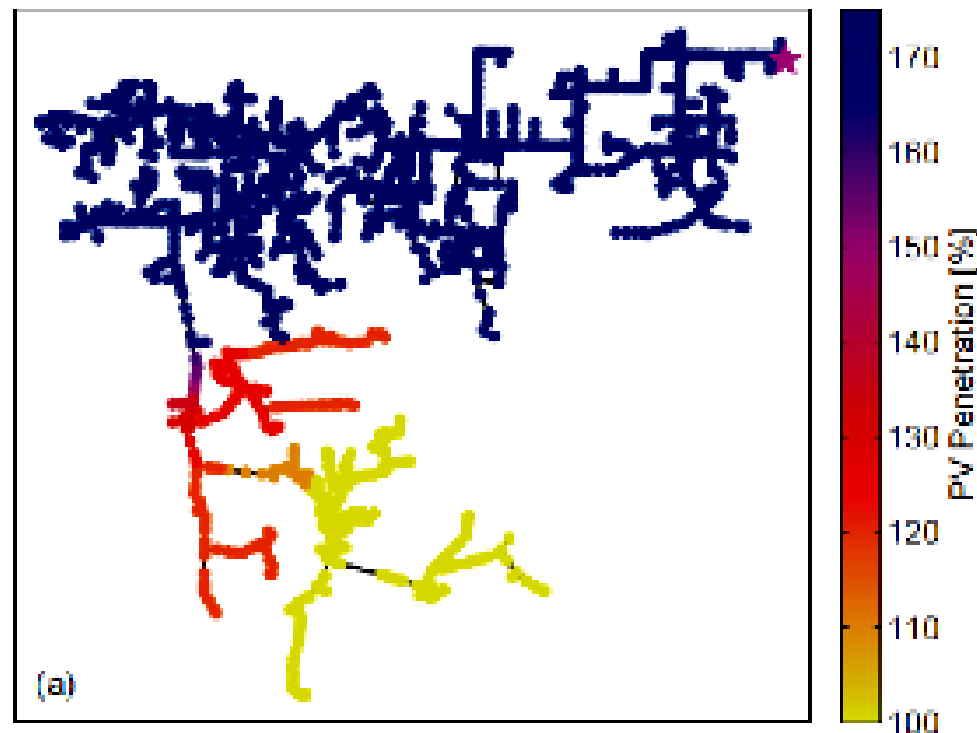


15 Real Distribution Feeders

Realistic distribution feeders can be simulated using quasi-steady state power flow in OpenDSS for various solar power penetration scenarios and smart inverter voltage control schemes.

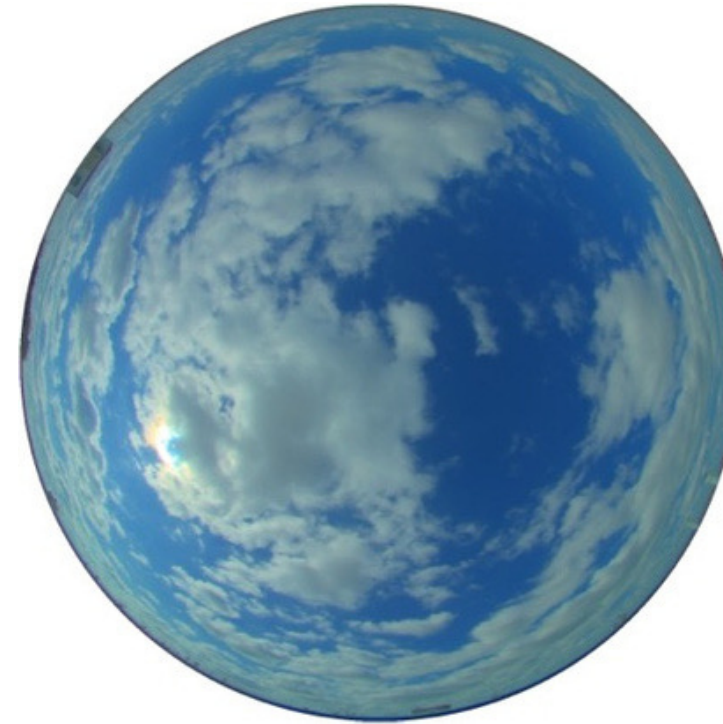

Solar Forecasts

Solar forecasts from sky imagery, satellites, and numerical weather prediction models.

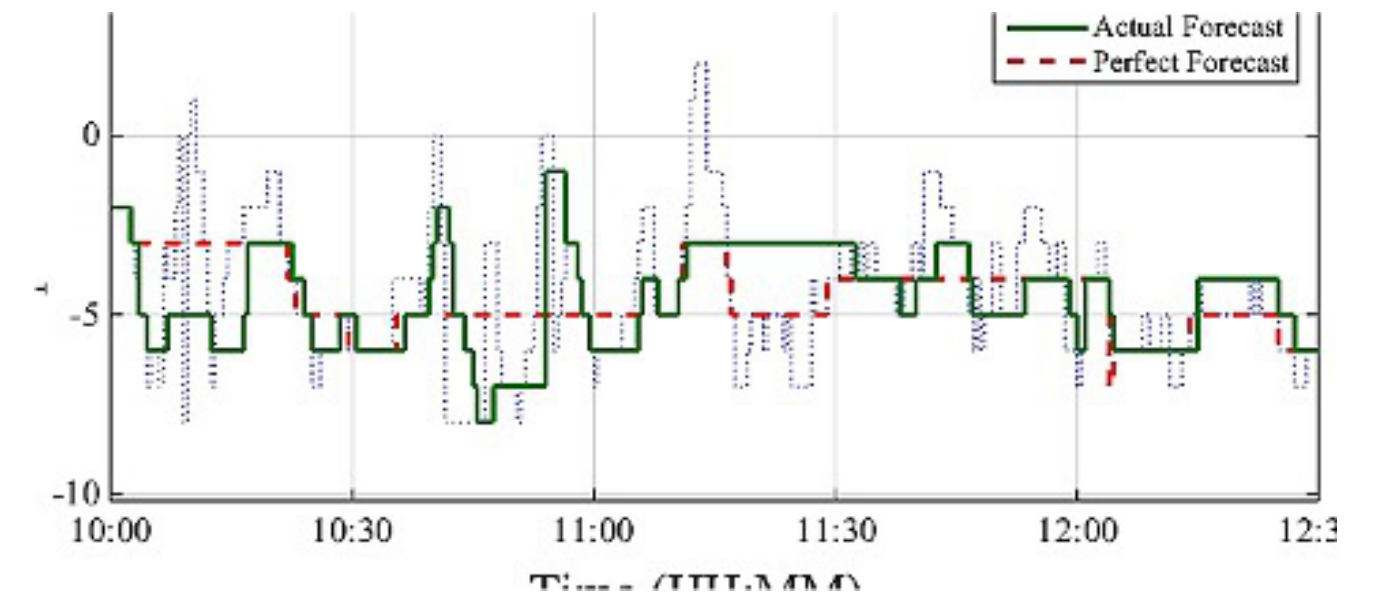

Transformer Tap Operations

Investigate the performance of different distributed or centralized control algorithms for minimizing the number of utility transformer tap operations by leveraging Phase 3 solar inverter functions.

Renewable Natural Gas Development Laboratory

UC San Diego

Test Lab Director

Robert Cattolica

Professor, Department of Mechanical and Aerospace Engineering

E: rjcat@ucsd.edu

Ombudsperson

Jan Kleissl


Director, UCSD Center for Energy Research

P: 619.376.3971

E: jkleissl@ucsd.edu



This laboratory provides fixed-bed and fluidized-bed reactors for the development and testing of catalysts and the associated design of chemical reactors for the synthesis of natural gas from renewable sources of syngas. UC San Diego has experience in the preparation and characterization of unique catalyst formulations, support matrices, and operating parameter optimization for increased performance. Computational fluid dynamic modeling of fluidized-bed reactors for the methanation of syngas is available scaling laboratory experiments to commercial scale.

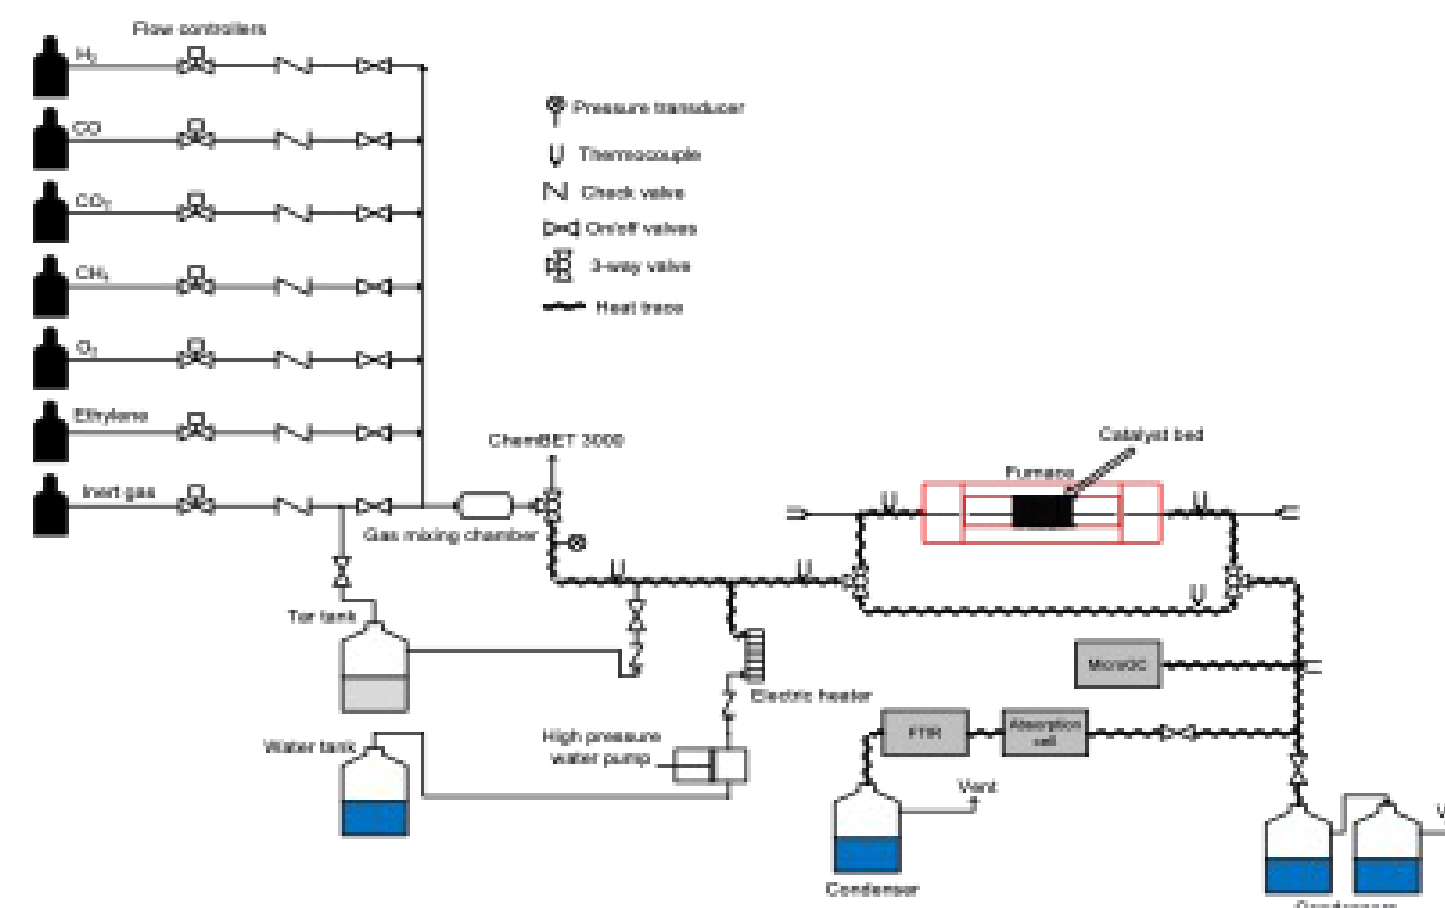

Fixed-Bed Flow Reactor for Methanation Catalyst Testing

- Fixed-Bed and Fluidized-Bed Methanation Reactors
- Capability to simulate specified syngas compositions
- Gas analysis with micro-GC and advanced GC-Chemiluminescent system for ultra-low sulfur measurement
- Catalyst characterization: ChemBet, XRD, EDX, XRF, and SEM
- CFD modeling of fluidized-bed chemical reactor design on parallel-processing workstation

Electric Vehicle Smart Charging


UC San Diego

Test Lab Director

Byron Washom
Director, Strategic Energy Initiatives
E: bwashom@ucsd.edu

Ombudsperson

Jan Kleissl
Director, UCSD Center for Energy Research
P: 619.376.3971
E: jkleissl@ucsd.edu




Through CHARGES, the DOE ARPA-e designed UC San Diego as one of two national facilities for testing of new advanced energy storage technology, including: platforms for cell level, module level, and full-scale grid-connected testing; grid-connected outdoor test platform to test three systems; and remote monitoring and testing capability.



Electric Vehicle Smart Charging

UC San Diego

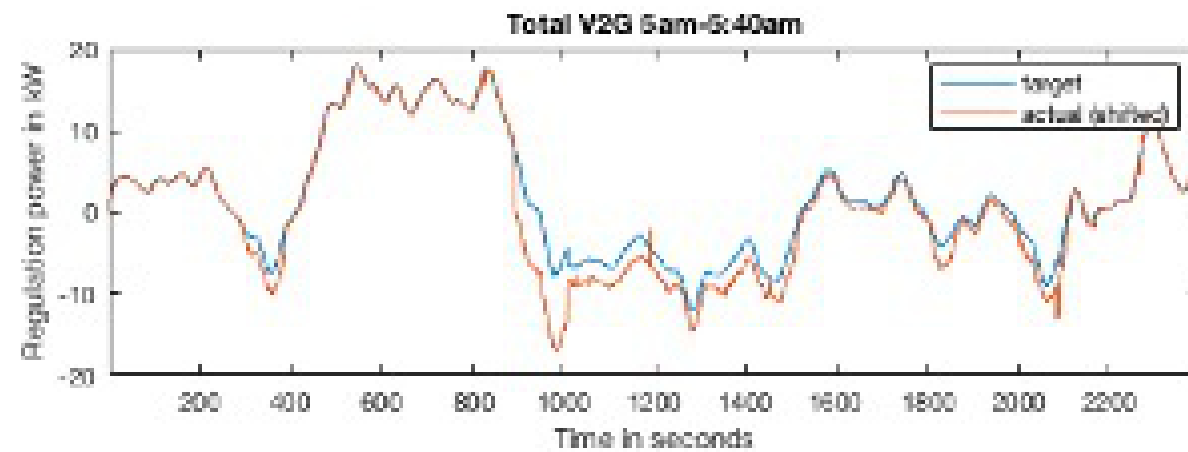

Smart Charging

Together with ChargePoint, PowerFlex / EDF, and Nuvve we have demonstrated V1G and V2G charging via an API to charging rates between 1.2 to 7 kW for the Level 2 stations. Modulating charging requires consent from EV drivers. We have extensive expertise in securing IRB approval and recruiting drivers.



ChargePoint

UC San Diego is the largest ChargePoint customer by energy consumed. ChargePoint presently owns and operates 183 Electric Vehicle (EV) charging stations at the UCSD campus (Figure 3) consisting of 182 Level 2 (up to 7 kW) charging stations and one DC fast charger at 75 kW.

Go ahead, get amped. **smart**

>> A special offer through **smart center San Diego & UC San Diego**

>> New 2016 smart fortwo electric drive

- The Daimler Affinity Lease program available to our Students, Faculty and Staff
- Get \$2,500 Ca Clean Energy Rebate
- For more information visit www.cleanvehiclerebate.org/eng

smart center San Diego
4750 Kearny Mesa Road, San Diego, CA 92111 • Tel (855) 416-5693 • www.smartcenterSanDiego.com

36 month lease. \$993 plus government fees and taxes due at signing. Cash due at signing includes \$618 capitalized cost reduction, \$295 acquisition fee and first month's lease payment of \$98. \$25 per mile excess fee over 30k total miles. No security deposit required. On approved above average credit. Must show proof of UC San Diego employment, or Student Status to be eligible for this offer. All offers expire 3/31/16.

A **PENSKE** AUTOMOTIVE DEALERSHIP

Customer Base

These stations serve a monthly base of 1200+ individual public, commuter and fleet patrons that are growing at a rate of 8% per *month* in response to the incentive pricing to over 39 makes and models of new and used EVs and accessibility to workplace charging. Given the planned build-out we anticipate 210 charging stations by the time of the start of the NSF Mid-Scale RI-2 award.

Technology Capabilities

UC San Diego

Technology Type	Technology Capabilities
Grid Technologies	<ul style="list-style-type: none">• All California Rule 21 Phase 3 functions such as Volt-var, Volt-Watt, LVRT, LFRT, etc.. Grid simulator. PV simulator. Inverters up to 30 kW.• Verify inverter performance compliance for all California Rule 21 Phase 1-3 functions, e.g., High- and Low-Voltage Ride-through, High- and Low-Frequency Ride-through, Volt-VAR response, Specified Power Factor, etc. Grid and PV simulators for testing inverters up to 30 kW capability under specified conditions• Smart Inverters (POC: Antoni Tong)
Energy Storage	<ul style="list-style-type: none">• The grid-connected outdoor test platform consists of three 40 ft test pads up to 1 MW. Remote monitoring and testing capability. Special safety features allow testing of many different types of battery systems.• Battery Energy Storage Systems – utility scale (POC: Mike Ferry)
Energy Storage	<ul style="list-style-type: none">• Up to 10 battery modules up to a maximum of 100 kW under controlled laboratory conditions. High resolution testing equipment with full bi-directional power capability allows very flexible testing and ability to simulate almost any DER connected condition.• Battery Energy Storage Systems – module level (POC: Mike Ferry)
Material Based	<ul style="list-style-type: none">• Broad spectrum of nanofabrication and characterization technologies and expertise that enable and accelerate cutting edge energy research, proof-of-concept demonstration, device and system prototyping, product development, and technology translation.• Nanotechnology Infrastructure (POC: Bernd Fruhberger)
Grid Technologies	<ul style="list-style-type: none">• Access to Synchrophasor (PMU) data from multiple locations in the Western Grid. Dedicated grid simulator hardware for computing real-time power flow dynamics. Three-phase grid-tied inverter, and switchable capacitive and inductive loads to simulate microgrid islanding capabilities in a lab environment.• Synchrophasor Grid Monitoring and Automation (SyGMA) Laboratory (POC: Raymond de Callafon)

Technology Capabilities

UC San Diego

Technology Type	Technology Capabilities
Grid Technologies	<ul style="list-style-type: none">• Virtual environment for solar power integration into distribution feeders including complete specifications for 15 real distribution feeders with 1000s of buses each; output from 20 solar PV systems at high resolution; forecast algorithms and data from numerical weather prediction, machine learning, and sky imagery, and optimization algorithms.• Solar Forecasting and Distribution System Integration(POC: Jan Kleissl)
Renewable Generation	<ul style="list-style-type: none">• Testing and characterization of catalysts for the synthesis of natural gas from renewable syngas.• Laboratory facilities include fixed-bed and fluidized-bed methanation reactors and associated analytical instruments. Micro analysts of catalyst with: ChemBet, XRD, EDX, XRF, and SEM. Advanced computational fluid dynamic modeling of methanation reactor designs.• Synthesis of Renewable Natural Gas (POC: Robert Cattolica)
Energy Storage	<ul style="list-style-type: none">• UC San Diego collaborates with seven OEM electric vehicle manufacturers and more than 10 makers of V1G and V2G supply equipment. Since UC San Diego is self-permitting, testing partners can bypass complicated IOU interconnection procedures.• Electric Vehicles (POC: Byron Washom)

UC SANTA BARBARA

Department of Chemistry Optical Characterization Facility

UC Santa Barbara

Address

Department of Chemistry and Biochemistry
University of California Santa Barbara
Santa Barbara, CA 93106-9510

Ombudsperson

Meredith Murr

P: 805.451.5089

E: murr@ucsb.edu




Optical Spectroscopy, Time-Resolves and Ultrafast Emission and Pump-Probe Spectroscopy, Optical Characterization of Organic Electronics Materials and Devices.



Department of Chemistry Optical Characterization Facility


UC Santa Barbara

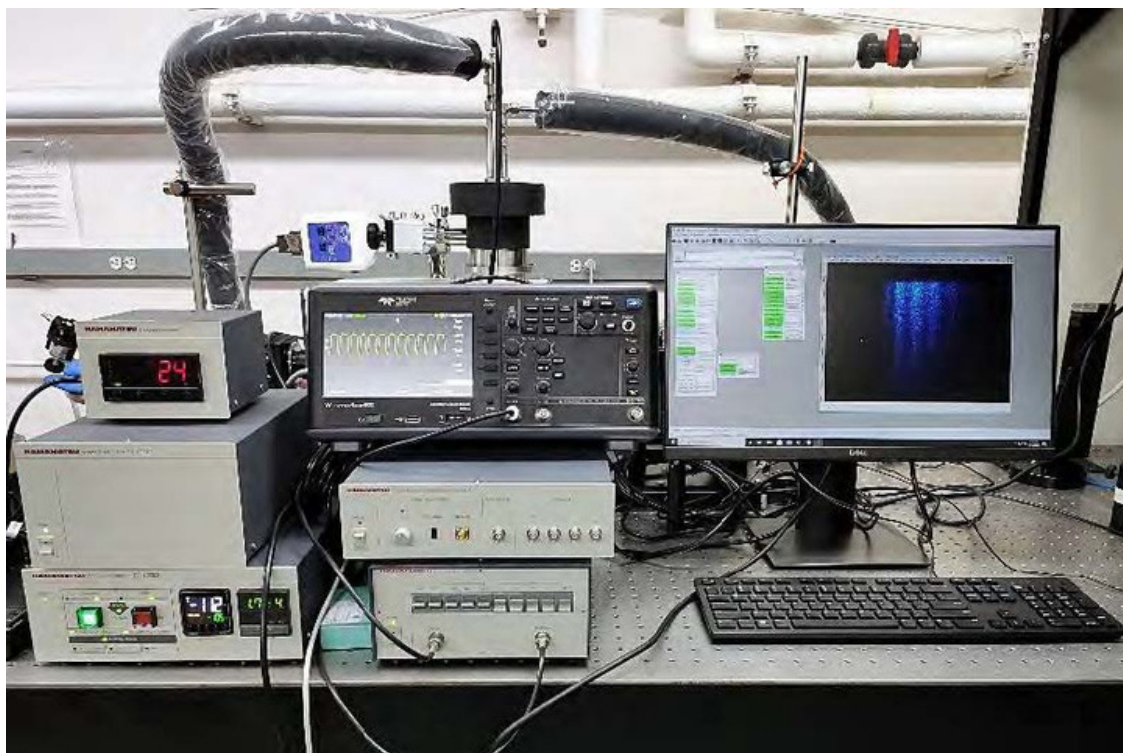

UCSB Department of Chemistry and Biochemistry Optical Characterization Facility (OCF) provides campus researchers with access to the state-of-the-art optical characterization instruments and methods. The facility offers commercial instruments and in house-developed custom characterization capabilities.



The OCF specializes in time-resolved emission and pump-probe spectroscopy and has advanced laser spectroscopy lab equipped with two femtosecond laser systems and large cache of spectroscopic instrumentation and optics, which can be configured to tailor the needs of researchers.

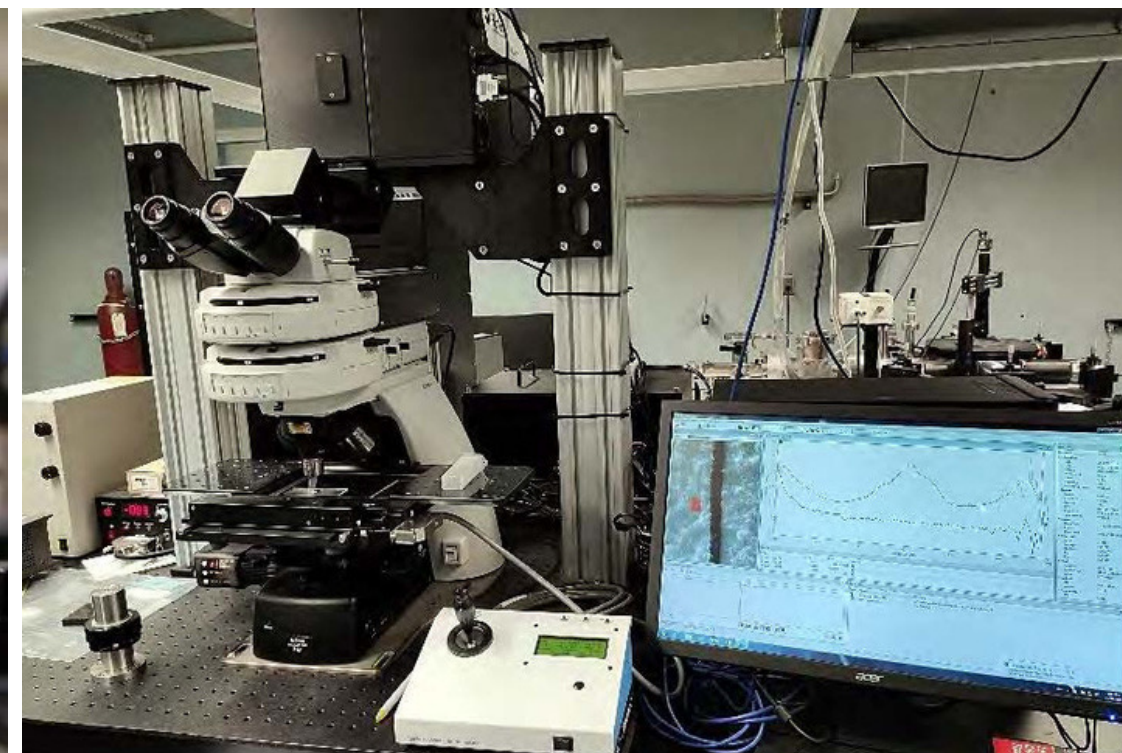

The OCF collaborates tightly with UCSB groups developing novel organic electronics materials and devices. The instruments available for this research thrust include solar simulator, external quantum efficiency spectrometer for photovoltaic devices, Kelvin probe analyzer, hyperspectral imager, and several custom experimental setups.

Department of Chemistry Optical Characterization Facility

UC Santa Barbara

Technology Type	
Material-Based	<ul style="list-style-type: none">• Time-resolved photo- and electroluminescence spectroscopy• Sub-nanosecond – minutes detection ranges with resolution down to 30 ps• Visible and NIR detection options• UV to NIR tunable pulsed laser excitation sources• LN2 cryostat for temperature-dependent measurements
Material-Based	<ul style="list-style-type: none">• Ultrafast pump-probe and non-linear spectroscopies• High energy Ti:Sapphire regenerative amplifier with an optical parametric amplifier and optical mixing unit for continuous wavelength tuning• Irradiation of samples with high intensity ultrashort laser pulses
Material-Based	<ul style="list-style-type: none">• Hyperspectral imaging of organic optoelectronic devices• Global, spectrally-resolved imaging in transmission, reflection, photo- and electroluminescence microscopy modes
Material-Based	<ul style="list-style-type: none">• Characterization of photovoltaic devices• Visible to NIR external quantum efficiency spectrometer for photovoltaic devices• Large area solar simulator with IV tracer• Custom testing capabilities (CELIV, transient Voc)
Material-Based	<ul style="list-style-type: none">• Commercial instrumentation for characterization of materials• Visible/NIR fluorimeter• Circular dichroism spectropolarimeter with NIR detection option• Kelvin probe analyzer in inert atmosphere glovebox• Raman confocal microscope

Materials Research Lab Polymer Facility

UC Santa Barbara

Address

615 Science Ln. Materials Research Lab, UC Santa Barbara
Santa Barbara, CA 93106-5121

Ombudsperson

Meredith Murr

P: 805.451.5089

E: murr@ucsb.edu

W: <https://mrl.ucsb.edu/polymer-characterization-facility>



Analytical testing of polymers and small molecules. Instrumentation available for obtaining molecular weights, thermal transitions, rheology, and particle sizing.



Materials Research Lab Polymer Facility

UC Santa Barbara



Polymer Testing: Gel Permeation Chromatography (GPC)

Determining molecular weight distributions is essential for polymer synthesis and the understanding of how a polymer behaves. In the Polymer Facility, six GPC instruments are dedicated to the purification and analysis of polymer materials.



Rheology, Thermal, and Mechanical Analysis of Materials

Study flow and deformation of materials under applied forces and temperatures. Dynamical Mechanical Analyzer (DMA), Differential Scanning Calorimeter (DSC), and state of the art rheometer can measure dampening, thermal transitions, viscosities, and the storage and loss moduli.



ESI Mass Spectrometry

Separate and identify analytes by mass with high sensitivity and selectivity. The mass spectrometer aids in identifying unknown compounds, determining the isotopic composition of elements in a molecule, and determining the structure of a compound by observing its fragmentation.

Materials Research Lab Polymer Facility

UC Santa Barbara

Technology Type	Technology Capabilities
Material-Based	<ul style="list-style-type: none">• Determining relative and absolute molecular weights, polydispersity, and particle sizing
Material-Based	<ul style="list-style-type: none">• Measuring viscosity and modulus of solids and polymer melts in relation to stress, strain, frequency, and temperature
Material-Based	<ul style="list-style-type: none">• Measuring heat capacity, glassy transitions, and heat flow
Material-Based	<ul style="list-style-type: none">• Chromatographic separation and mass identification of organic and inorganic compounds

Materials Research Lab TEMPO Facility

UC Santa Barbara

Address

615 Science Ln. Materials Research Lab
University of California Santa Barbara
Santa Barbara, CA 93106-5121


Point of Contact

Dr. Amanda Strom
P: 805.893.7925
E: strom@ucsb.edu

W: <http://www.mrl.ucsb.edu/tempo-facility>



Porosimetry and surface area, elemental analysis, thermal properties, evolved gas analysis, fluorescence, absolute quantum yield, density, absorption of light, magnetism, resistance, thermal and electrical conductivity, heat capacity (1.8 K to 1800 K).

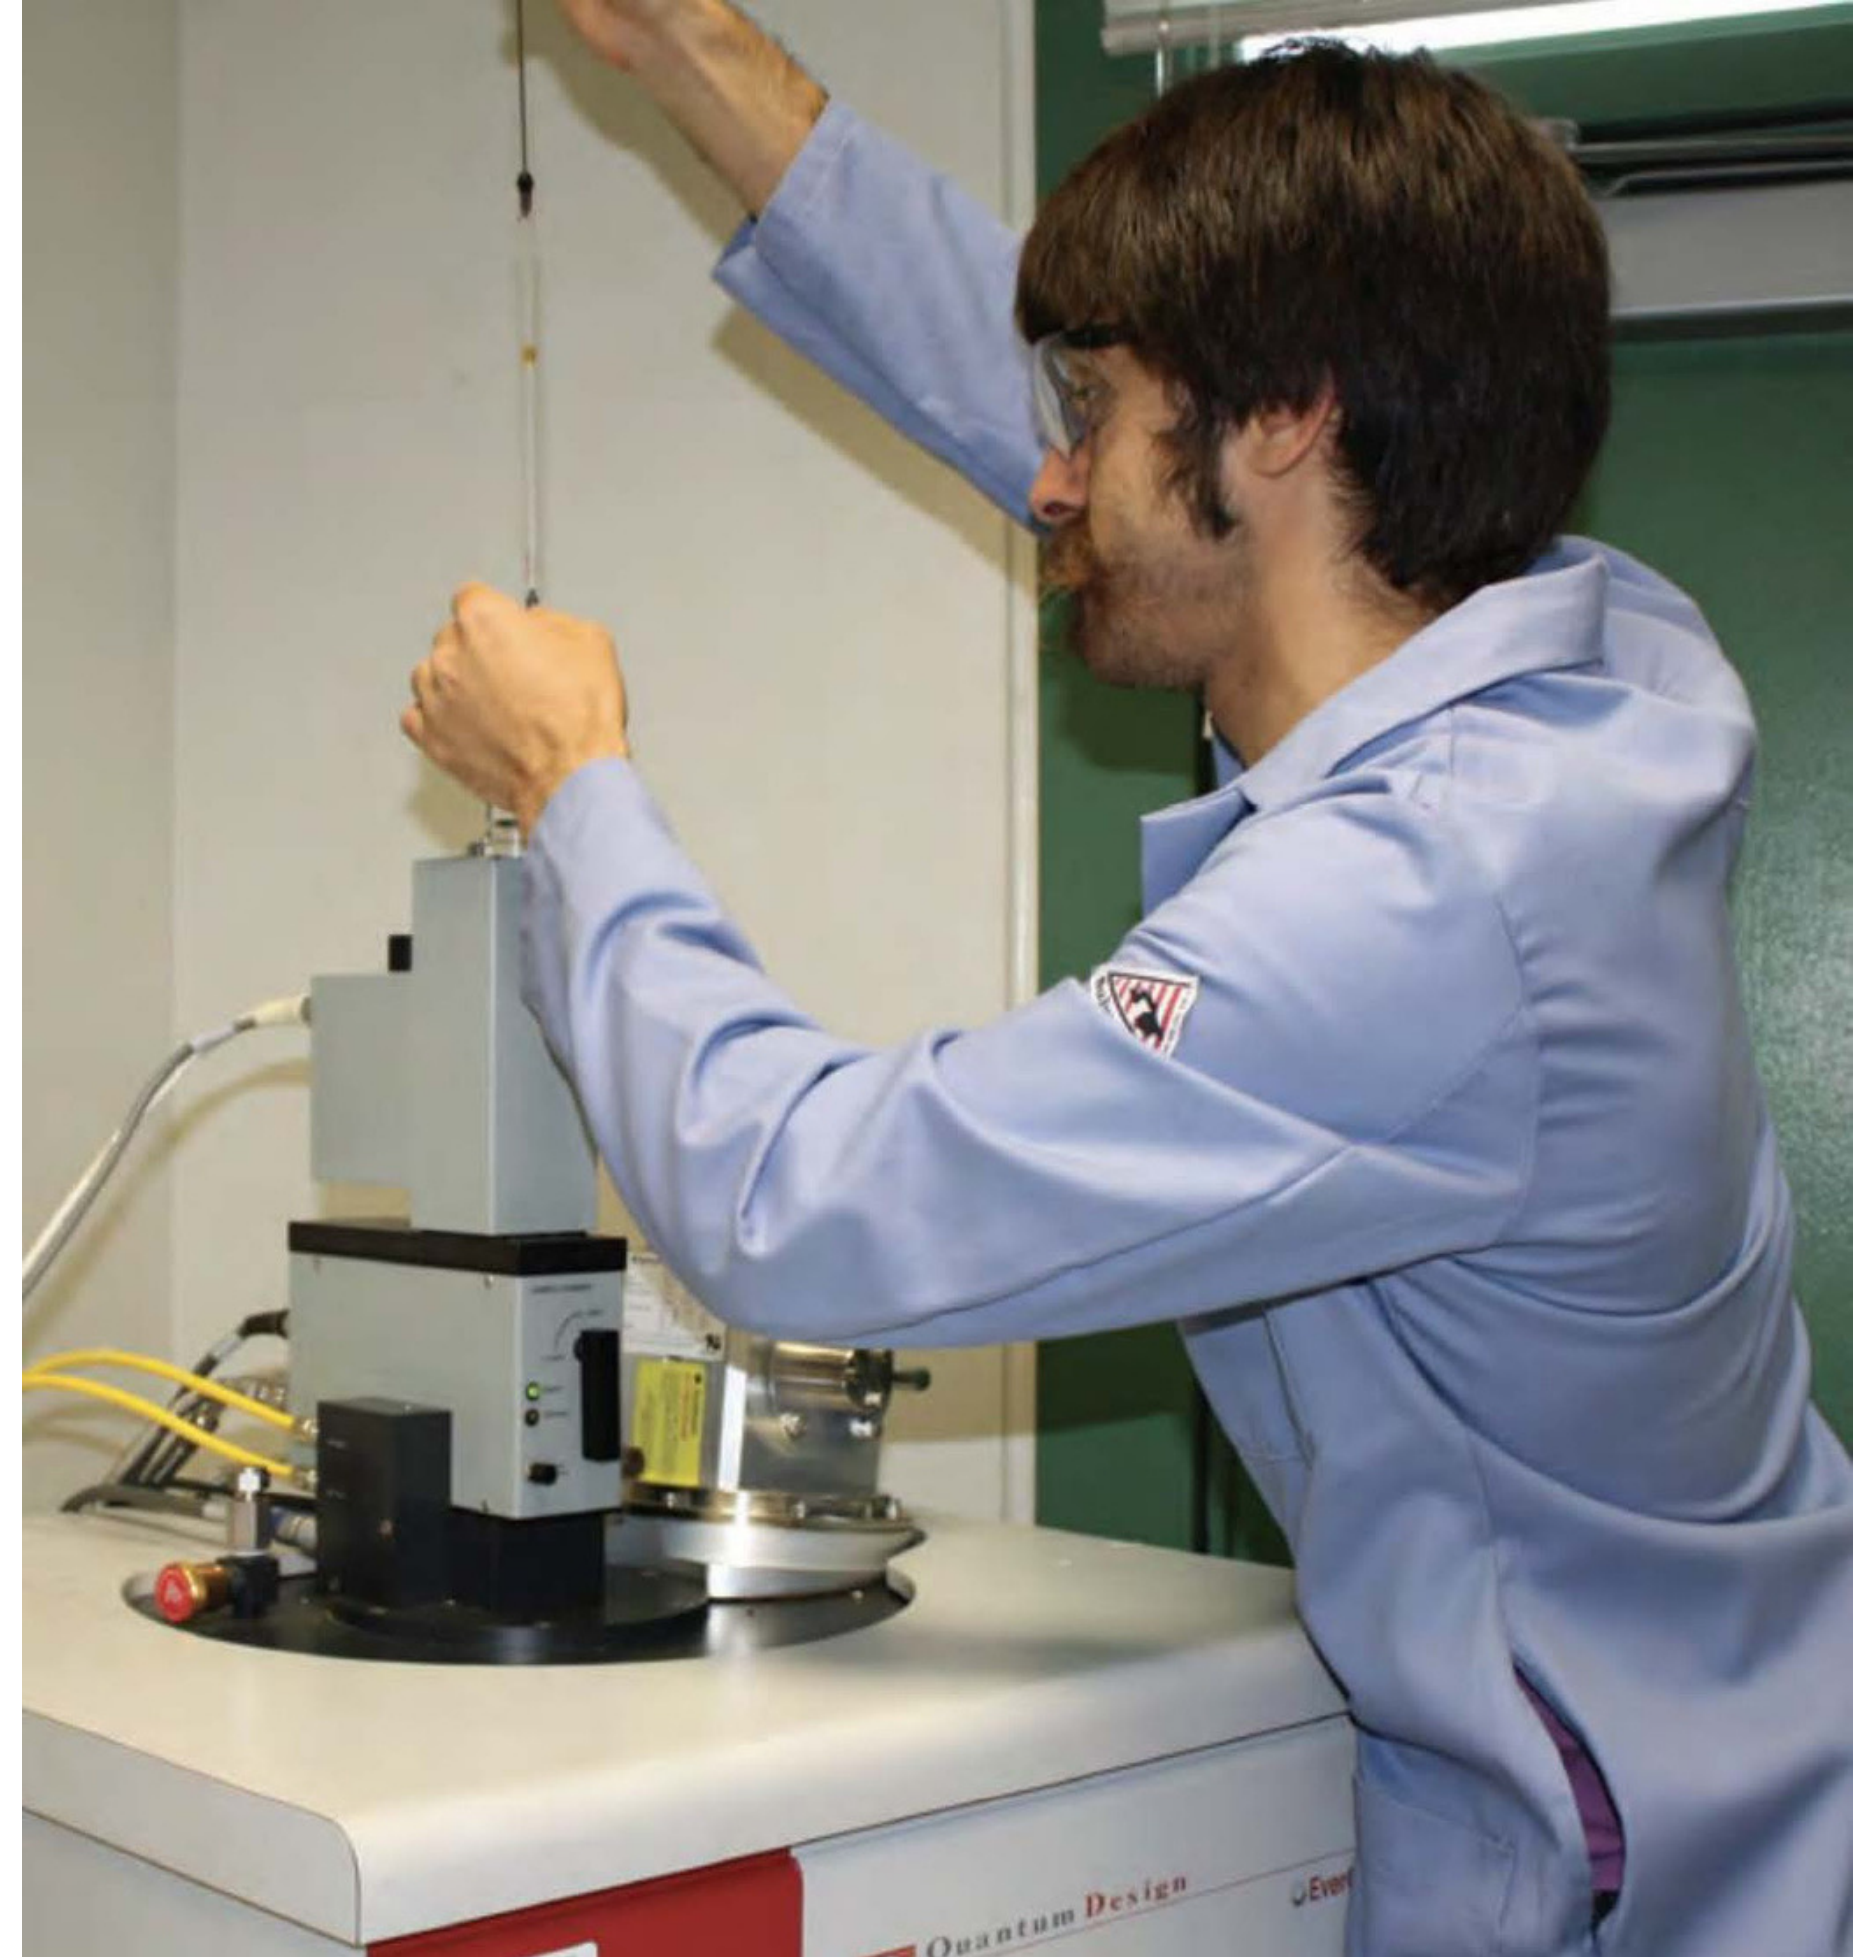

Materials Research Lab TEMPO Facility

UC Santa Barbara




Thermo Electronic/ Elemental Magnetic Porosity and Optical

The TEMPO facility is for testing fundamental properties of materials such as magnetism, thermal stability or absorption of light. We have 15 different tools for materials testing. The Low-Temp Lab is pictured above.

TEMPO Low Temperature Lab:

Can test the electrical and thermal transport, i.e. conductivity, as well as magnetic properties of materials as a function of temperature (1.8 to 1000 Kelvin) and/or magnetic field (up to 14 Tesla).

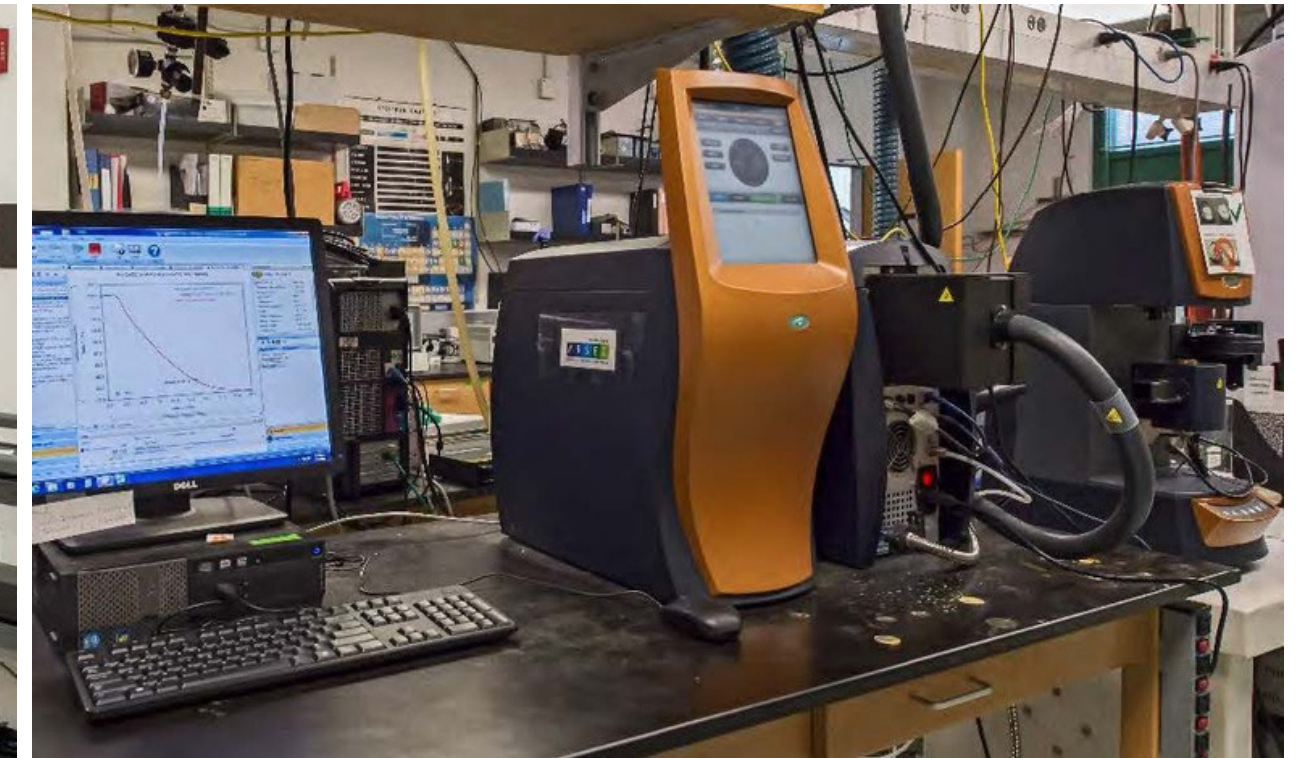

The TEMPO facility houses instruments that would be most useful in early-stage development or choice of materials for energy applications such as the TGA, above, for thermal analysis.

Accessible sample sizes are small scale and typically not intended for device testing.

Materials Research Lab TEMPO Facility

UC Santa Barbara

Technology Type	Technology Capabilities
Material-Based	<ul style="list-style-type: none">• Electrical and Thermal Properties<ul style="list-style-type: none">◦Resistivity, charge carriers, thermoelectric figure of merit, IV curves, critical current, superconductors, heat capacity, thermal conductivity
Material-Based	<ul style="list-style-type: none">• Structural Properties<ul style="list-style-type: none">◦High-precision density, porosity, surface area, chemi- and physi- absorption
Material-Based	<ul style="list-style-type: none">• Thermal Properties<ul style="list-style-type: none">◦Decomposition, heat capacity, thermal transport
Material-Based	<ul style="list-style-type: none">• Optical Properties<ul style="list-style-type: none">◦Absorption in UV, visible, Near-IR, mid- IR. Emission and absolute quantum yield.

Materials Research Laboratory Spectroscopy Facility

UC Santa Barbara

Address

615 Science Ln. Materials Research Lab, UC Santa Barbara
Santa Barbara, CA 93106-5121

Ombudsperson

Meredith Murr

P: 805.451.5089

E: murr@ucsb.edu

W: <https://mrl.ucsb.edu/spectroscopy-facility>



The spectroscopy facility is the home to magnetic resonance instruments that include seven NMR spectrometers (100MHz, 300MHz, 400MHz, 500MHz (x2), 600MHz, and 800MHz) and a X-band EPR spectrometer. The facility focuses on materials research through structure determination, physical property measurement, kinetics, thermodynamics, quality control, and quantification.



Materials Research Laboratory Spectroscopy Facility

UC Santa Barbara



The cutting edge dynamic nuclear polarization (DNP) NMR instrument addresses the most serious disadvantage of NMR by enhancing sensitivity by up to 660 times, opening new avenues to materials research such as catalysis, coating, and doping, and to materials of limited amount, low loading and insensitive nuclei.



The high field 800MHz NMR spectrometer is equipped with both solution- and solid-state NMR capabilities, suitable for studies of proteins, polymers and other macromolecules where resolution and sensitivity are essential and for researches of materials with quadrupolar nuclei (^{27}Al , ^{23}Na , ^{71}Ga , etc.).



This unique 300MHz super-wide bore (SWB) instrument is loaded with a variety of NMR capabilities from solid-state NMR, PFG diffusion measurement (DOSY), rheology NMR (rheo-NMR), magnetic resonance imaging (MRI), to the newly implemented electrophoretic NMR. The 150mm bore size of the magnet allows easy hardware customization and fabrication.

Materials Research Laboratory Spectroscopy Facility

UC Santa Barbara

Technology Type	Technology Capabilities
Material-Based	<ul style="list-style-type: none">• Diffusion range 10^{-8} to 10^{-14} m²/s for nuclei including, but not limited to, ¹H, ¹⁹F, ⁷Li, ²H, ²³Na, and ³¹P
Material-Based	<ul style="list-style-type: none">• Mapping velocity, strain, and stress to study rheological properties of fluids and soft matters
Material-Based	<ul style="list-style-type: none">• Transport of charged particles (e.g. ¹⁹F, ⁷Li) measured with PFG NMR in an electric field
Material-Based	<ul style="list-style-type: none">• Chromatographic separation and mass identification of organic and inorganic compounds

Marine Science Institute Analytical Laboratory

UC Santa Barbara

Address

MSRB 520, Room 1011
University of California, Santa Barbara
Santa Barbara, CA 93106-5121

Ombudsperson

Meredith Murr

P: 805.451.5089

E: murr@ucsb.edu

W: <https://msi.ucsb.edu/facilities-services/analytical-lab/about>



The MSI Analytical Laboratory is a facility established in 1977 that performs chemical analysis in support of the research community.

The major capabilities of the Analytical Lab include elemental analysis of carbon, hydrogen and nitrogen (CHN) by combustion and automated determination of dissolved nutrients in natural waters using a 5-channel Flow Injection Analyzer. The lab also provides a stable isotope facility.



Marine Science Institute Analytical Laboratory

UC Santa Barbara

Technology Type	Technology Capabilities
Material-Based	<ul style="list-style-type: none">• Flow Injection Analyzer<ul style="list-style-type: none">◦PO4, SiO2, NO2, NO2+NO3, NO4
Material-Based	<ul style="list-style-type: none">• Elemental Analyzer<ul style="list-style-type: none">◦wt% C, H, and N
Material-Based	<ul style="list-style-type: none">• Isotope Ratio Mass Spectrometer<ul style="list-style-type: none">◦δ15N, δ13C

NRI-MCDB Microscopy Facility

UC Santa Barbara

Address

UCSB NRI
5173 Biological Sci Bldg II
Santa Barbara, CA 93106-5060

Ombudsperson

Meredith Murr

P: 805.451.5089

E: murr@ucsb.edu




Light microscopy, Brightfield, Polarization, DIC,
Flourescence, Transmission Electron Microscopy.



NRI-MCDB Microscopy Facility

UC Santa Barbara

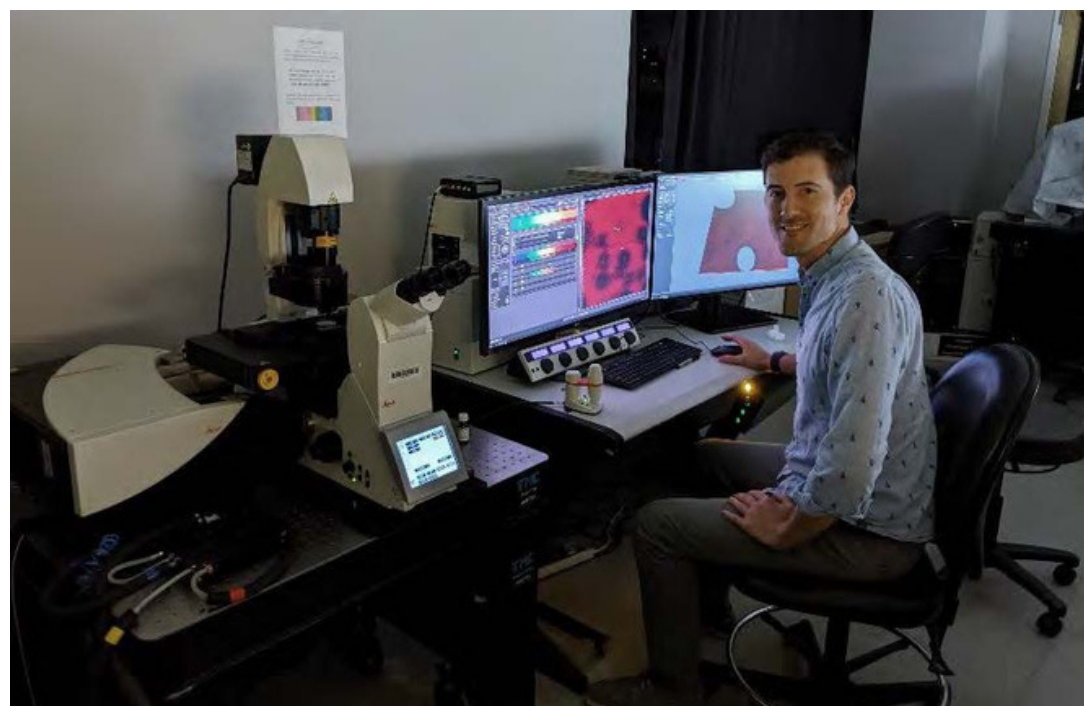

The NRI-MCDB Microscopy Facility serves the entire UCSB community in its mission to provide access and training to cutting edge microscopy instrumentation. Researchers and students in numerous departments use the facility to acquire the images they need to accomplish their research.



While primarily a light microscope facility focusing on confocal and epi-flourescence microscopes, the Facility also houses an easy-to-use, high contrast transmission electron microscope. Image analysis is covered too with high-end PC workstations equipped with visualization and analysis software.



A couple less conventional imaging modalities are available. The lightsheet microscope allows 3D imaging of sample too large for confocal imaging. The 3D Cell Explorer enables long-term label-free imagine of live cells. Contact the Facility Director for more information.

NRI-MCDB Microscopy Facility

UC Santa Barbara

Technology Type	
Material-Based	<ul style="list-style-type: none">• 3D fluorescence imaging• temperature controlled stage• video rate time-lapses• fluorescence lifetime imaging (FLIM)• motorized stage for multiple field-of-view stitching
Material-Based	<ul style="list-style-type: none">• high contrast for biological samples• 40-120 kV
Material-Based	<ul style="list-style-type: none">• 3D fluorescence imaging of larger (millimeter scale) objects• 2-color simultaneous imaging• Rotation capable sample holder for Multiview imaging
Material-Based	<ul style="list-style-type: none">• Inverted or upright• high-end CCD or CMOS cameras• 4x to 100x objective lenses
Material-Based	<ul style="list-style-type: none">• 3D imaging of unlabeled samples with contrast determine by refractive index• Incubation stage allowing days long time lapses with low photodoses



FLEXLAB®

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov


W: flexlab.lbl.gov



FLEXLAB® is a one-of-a-kind testing facility for energy-efficient building technologies that is helpful to develop the next generation of innovative, energy-saving systems.



FLEXLAB® allows users to develop and test energy-efficient building and grid technologies individually or as an integrated system, under real-world conditions.



FLEXGRID is a FLEXLAB® testing system that offers distributed energy resources testing capabilities, enabling real-time comparisons between demand, renewables, inverters and storage.





FLEXLAB® allows real-world testing under controlled occupied or unoccupied conditions, including the use of thermal mannequins to generate occupancy heat signatures. Designed to study system technologies, FLEXLAB is home to thousands of sensors, including power measurement at every outlet and device.



FLEXLAB® uniquely incorporates all major building end use technologies as well as DERs under one roof, to enable real-time comparison tests. Base case conditions can represent the existing building stock, competing technology conditions, or energy code conditions.



FLEXLAB® was designed to enable the integration and testing of a full range of technologies and controls. Our data acquisition and controls systems allow for integration across building technologies, renewable energy sources, storage and electric vehicle charging.

Technology Type	Technology Capabilities
Building Technologies	<ul style="list-style-type: none">• 4 testbeds with 2 cells each for comparison studies. Each 600sf cell representative of a single thermal HVAC zone in a commercial building. Real-time comparison studies under live conditions (identical base case and test case chambers). One testbed fully rotates to allow studies under different solar orientations (e.g. south-, west-, north- facing). High accuracy and high granularity of sensing at individual device through to system level. Testing includes:• All major building end use systems – HVAC, lighting, shading, envelope, plug loads and integrated controls:<ul style="list-style-type: none">◦Whole building (end use system integration, performance)<ul style="list-style-type: none">■HVAC zone level systems (e.g. VAV boxes, fan coils, in-slab radiant systems, air handlers, rooftop systems and controls)■Lighting and controls (e.g. overhead, task, zone level, fixture specific, dimming, occupancy based)■Deep daylighting technologies (light redirecting louvers, skylights)■Exterior shading, interior shading■Building integrated photovoltaics■Phase change materials (envelope and interior applications)■Thermal mass conditions (light weight construction to heavy mass)■Plug load devices and controls• HVAC systems support packaged Rooftop Units, Air handlers, radiant panels and radiant in-slab systems, Duct sealing technologies• Other performance characterization (e.g. flow hood testing, tracer gas and other airflow measurement techniques, calibration)• Thermal comfort performance (e.g. dry bulb temperature, mean radiant/operative temperature, humidity, stratified space temps, air velocity, other)• Visual comfort performance (e.g. illuminance, glare)• Indoor air quality characteristics
Energy Efficiency	<ul style="list-style-type: none">• Energy performance studies at device and system level (e.g. consumption, peak, demand response, power quality)• Integration and interoperability between devices and systems• Controls optimization at end use level and between end use systems
Energy Storage	<ul style="list-style-type: none">• Studies of storage in application with PV generation, and building loads, including:<ul style="list-style-type: none">◦Grid optimized DER (e.g. storage) and building technologies controls testing◦Comparison of technologies or control strategies (3 sets of solar/inverter/battery arrangements)

Technology Type	Technology Capabilities
Grid Technologies	<ul style="list-style-type: none">• Building technologies grid integration controls studies including:<ul style="list-style-type: none">◦AutoDR integration and custom applications◦Demand response controls for HVAC, lighting, shading and plug load technologies◦Model PredictiveControl◦Peak energy reduction◦Communications testing, including latencies, response◦Grid system operator signal integration
Grid Technologies	<ul style="list-style-type: none">• FLEXGRID – A Distributed Energy Resources testing infrastructure at FLEXLAB Technologies covered include battery storage (19kWh currently, may be changed);, bidirectional electric vehicle charging; 3 set of PV inverter arrays (15kW total); inverters with API access for controls integration; Opal-RT real time grid simulator; Ametek MX-30 regenerative power supply (emulates grid or other power conditions such as harmonics, voltage sag etc.); ~100 programmable loads, including DC, AC, from 1/4hp to 3kW, variable speed loads, fans, resistive loads<ul style="list-style-type: none">◦DER technology integration studies:◦Grid optimized EV, DER and building technologies controls testing◦Comparison of technologies or control strategies (3 sets of solar/inverter/battery arrangements)◦Microgrid controls development and testing◦Real-time integration of DER and FLEXLAB building technologies controls strategies◦Grid conditions emulation (<480V)◦Grid system operator controls signal integration◦Inverters in delta or wye configuration◦Micro psynchrophasor power quality measurements at key locations in DER and testbed electrical distribution
Renewable Generation	<ul style="list-style-type: none">• Studies of solar PV generation in application with DER technologies and building loads, including:<ul style="list-style-type: none">◦Grid optimized DER and building technologies controls testing◦Comparison of technologies or control strategies (3 sets of solar/inverter/battery arrangements)◦Microgrid controls development and testing◦Real-time integration of DER and FLEXLAB building technologies controls strategies

Technology Type	Technology Capabilities
Transportation	<ul style="list-style-type: none">• Bidirectional Electric Vehicle charger, in application with other DER and building load technologies. Testing includes:<ul style="list-style-type: none">◦ Bidirectional charging, use of EV as a power supply to buildings, or a grid resource◦ Grid optimized EV, DER and building technologies controls testing

Connected Devices Lab

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator


Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov

W: flexlab.lbl.gov



The Connected Devices lab develops prototypes and tests small devices and plug loads with a focus on:

- Energy Reporting
- Zero StandbyEnergy
- Direct DC Devices
- Small DC System Testing
- Communication and Networks

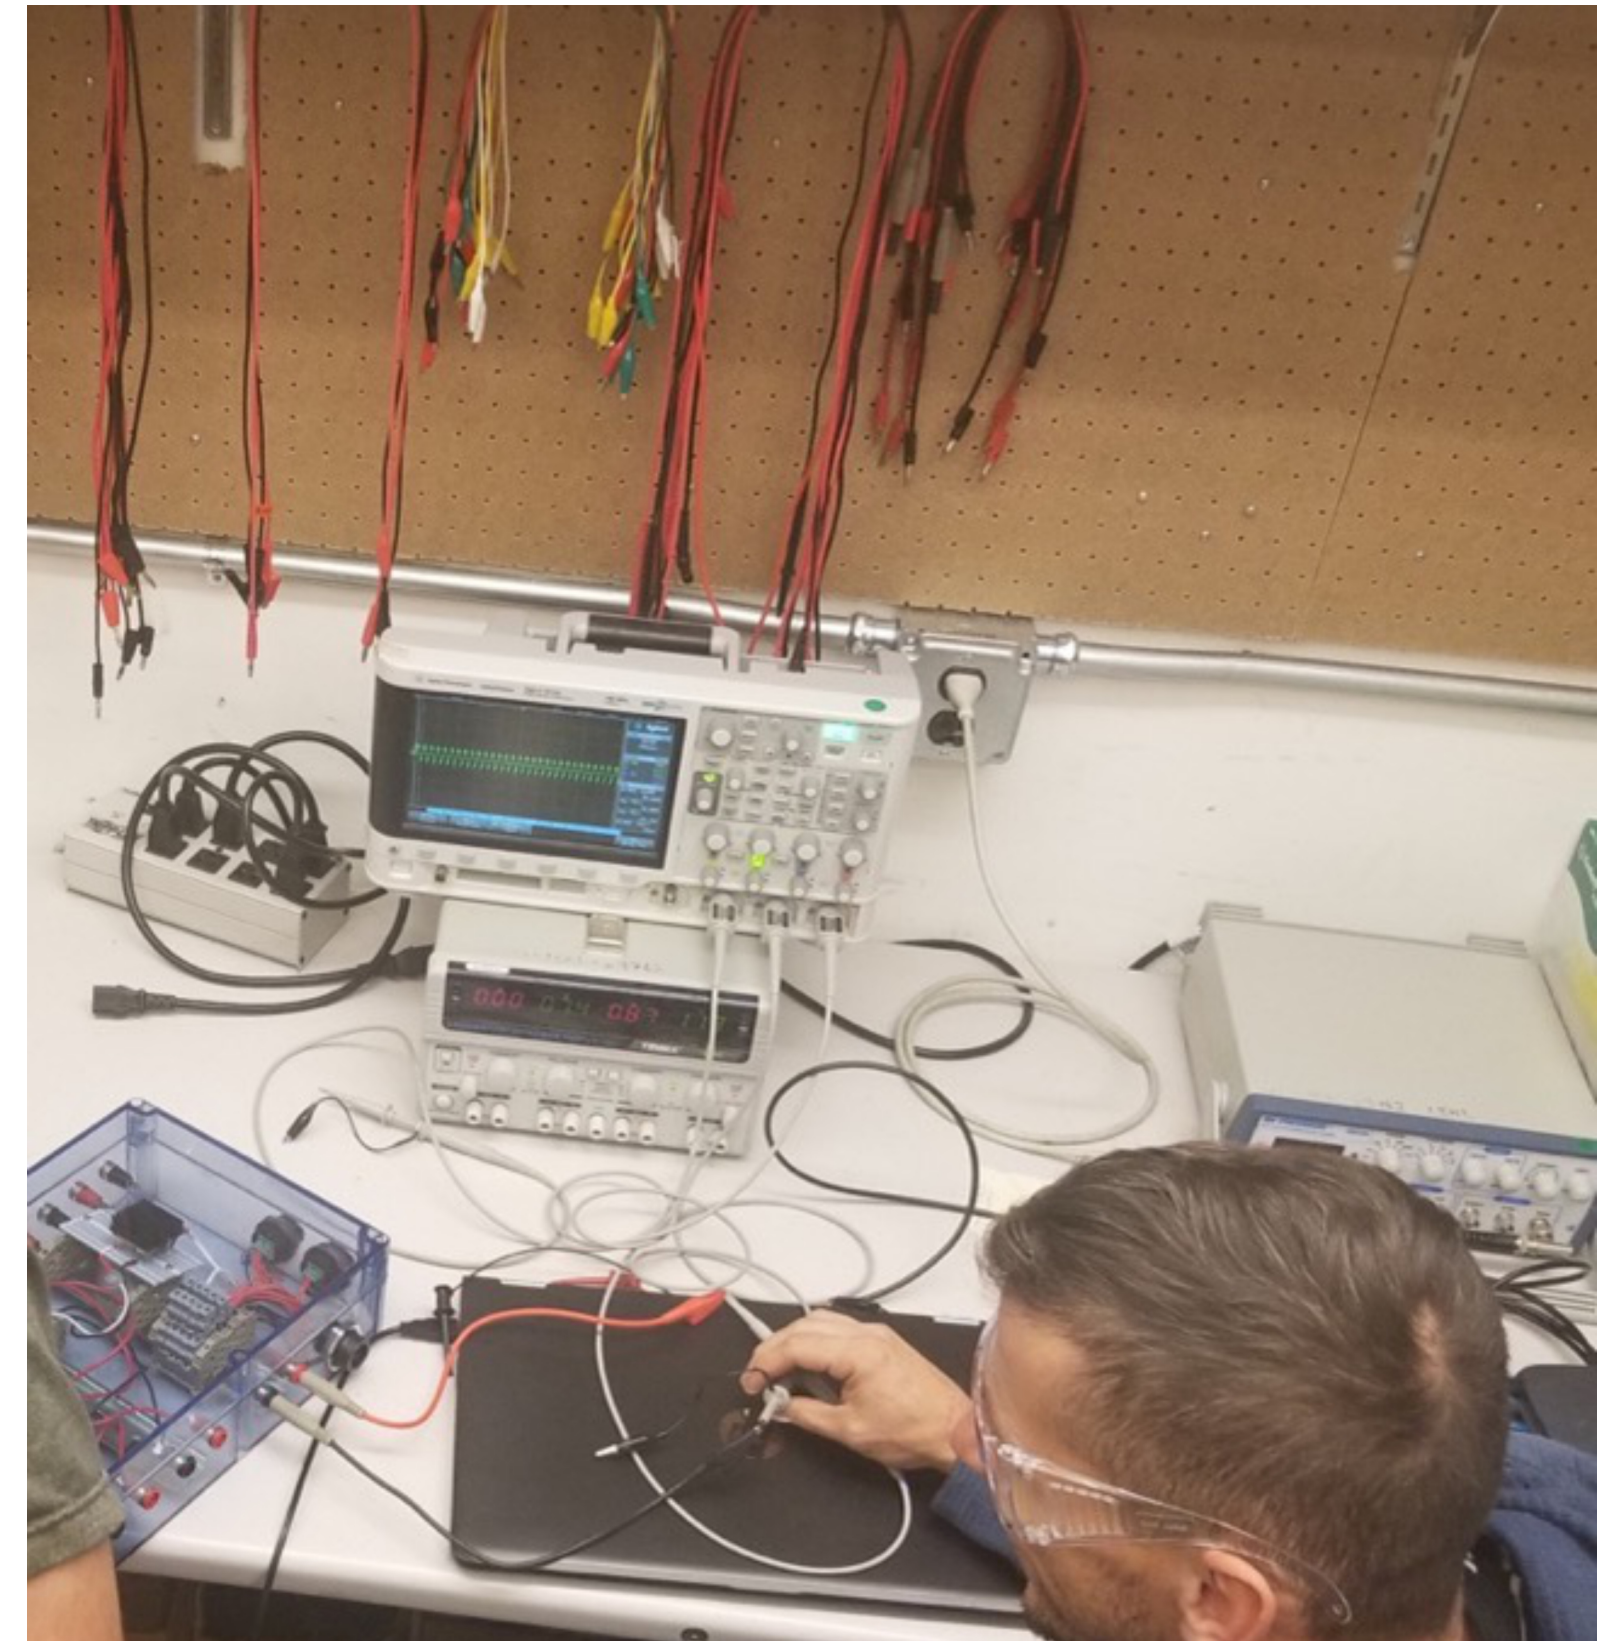

Connected Devices Lab

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Building Technologies	<ul style="list-style-type: none">• Small electronics, power supplies, direct DC devices, small DC systems, communications and network equipment testing and evaluation:<ul style="list-style-type: none">◦Design, fabrication and testing◦Communications evaluation (e.g. latency, other characteristics)◦Power measurement (current, voltage, power, power quality)◦Standby power evaluations
Energy Efficiency	<ul style="list-style-type: none">• Small electronics, power supplies, direct DC devices, small DC systems, communications and network equipment testing and evaluation:<ul style="list-style-type: none">◦Power measurement (current, voltage, power, power quality)◦Standby power evaluations
Internet of Things	<ul style="list-style-type: none">• Small electronics, power supplies, direct DC devices, small DC systems, communications and network equipment testing and evaluation:<ul style="list-style-type: none">◦Design, fabrication and testing◦Communications evaluation (e.g. latency, other characteristics)◦Power measurement (current, voltage, power, power quality)◦Standby power evaluations

Advanced Windows Testbed

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov

W: flexlab.lbl.gov



Investigates building façade systems to promote the advancement of interactive façade, lighting, and HVAC systems.



Test chambers are thermally isolated to enable window heat flow measurements to be made on a comparative basis. The chambers are designed to emulate typical private offices so that daylighting, comfort, and human factors studies can be conducted as well.



Advanced Windows Testbed


Lawrence Berkeley National Lab



Enables investigations of system-level interactions between innovative façade systems and impacted lighting and HVAC systems using outdoor tests in three full-scale, side-by-side instrumented test chambers with south-facing interchangeable façade openings, interior or exterior shading devices, and dedicated air handlers.



Each chamber is thermally isolated so that window heat flow measurements can be made on a comparative basis. The chambers are designed to emulate typical private offices for daylighting, comfort, and human factors studies. The test cells are highly instrumented with research-grade sensors for power metering, heat flow measurement, and photometric light and glare sensors.

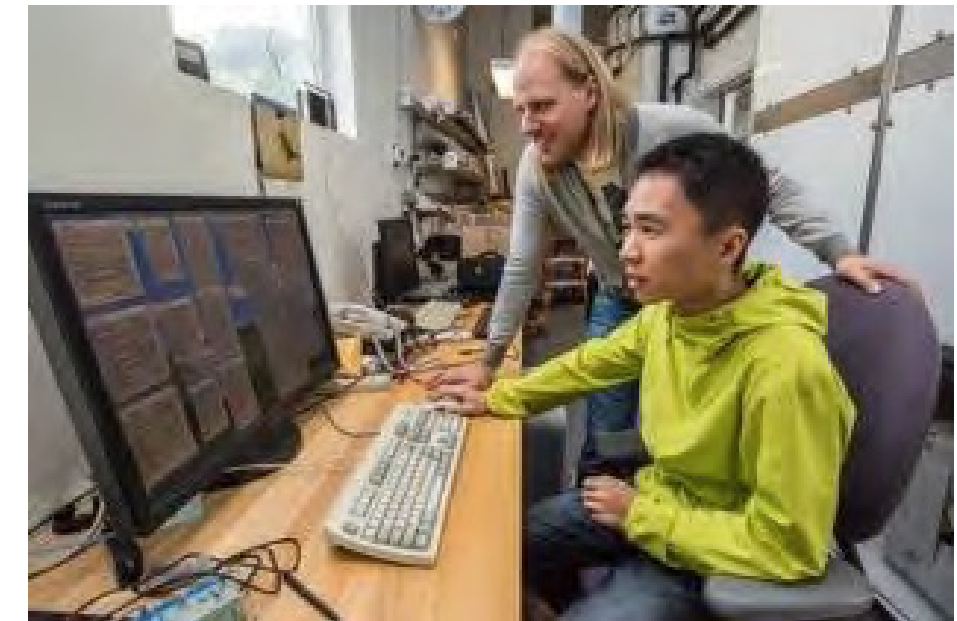

Scientists collaborate with industry to evaluate prototype systems, working out control system designs for dynamic, intelligent façade systems or characterizing the luminous environment resulting from innovative daylighting systems. The performance is evaluated for lighting and daylighting, visual comfort, thermal comfort, and energy use.

Advanced Windows Testbed

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Building Technologies	<ul style="list-style-type: none">• 3 side by side thermally isolated test chambers each emulating a typical private office. Studies of building façade technologies; Glazing (glazing assemblies, films, coatings, electrochromic, thermochromic); Envelope; Exterior shading; Interior shading and controls; Lighting (single office, overhead and task); Building integrated photovoltaics; Integrated controls strategies; DC power (PV, battery, lights) including:<ul style="list-style-type: none">◦Real time comparison studies (base case to new technology)◦Daylighting characterization and evaluation◦System controls interoperability and interactions between façade, shading and lighting◦Model predictive controls◦Sensor and controls testing◦HVAC interactive thermal response, energy use◦Thermal comfort performance (dry bulb temperature, mean radiant/operative temperature, humidity, stratified space temps, air velocity, other)◦Visual comfort performance (illuminance, glare)
Energy Efficiency	<ul style="list-style-type: none">• 3 side by side thermally isolated test chambers each emulating a typical private office. Studies of building façade technologies; Glazing (glazing assemblies, films, coatings, electrochromic, thermochromic); Envelope; Exterior shading; Interior shading and controls; Lighting (single office, overhead and task); Building integrated photovoltaics; Integrated controls strategies; DC power (PV, battery, lights) including:<ul style="list-style-type: none">◦Real time comparison studies (base case to new technology)◦Energy performance (consumption, peak demand)
Grid Technologies	<ul style="list-style-type: none">• 3 side by side thermally isolated test chambers each emulating a typical private office. Studies of building façade technologies; Glazing (glazing assemblies, films, coatings, electrochromic, thermochromic); Envelope; Exterior shading; Interior shading and controls; Lighting (single office, overhead and task); Building integrated photovoltaics; Integrated controls strategies; DC power (PV, battery, lights) including:<ul style="list-style-type: none">◦Demand response controls (e.g. AutoDR)◦Model predictive controls
Renewable Generation	<ul style="list-style-type: none">• 3 side by side thermally isolated test chambers each emulating a typical private office. Studies of building façade technologies; Glazing (glazing assemblies, films, coatings, electrochromic, thermochromic); Envelope; Exterior shading; Interior shading and controls; Lighting (single office, overhead and task); Building integrated photovoltaics; Integrated controls strategies; DC power (PV, battery, lights) including:<ul style="list-style-type: none">◦Solar technology integration◦Energy performance (consumption, peak demand)◦Demand response controls (e.g. AutoDR)◦Model predictive controls

Window Thermal Properties Laboratory

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov


W: flexlab.lbl.gov



The Window Thermal Properties Laboratory produces empirical data for thermal model validation and development, in steady state controlled environmental chambers, as well as outdoor (solar) calorimeter chambers.



Quantitative Infrared Thermography provides detailed, high resolution, surface temperature measurements for model validation, as well as the development and evaluation of high-performance insulating building envelope products.

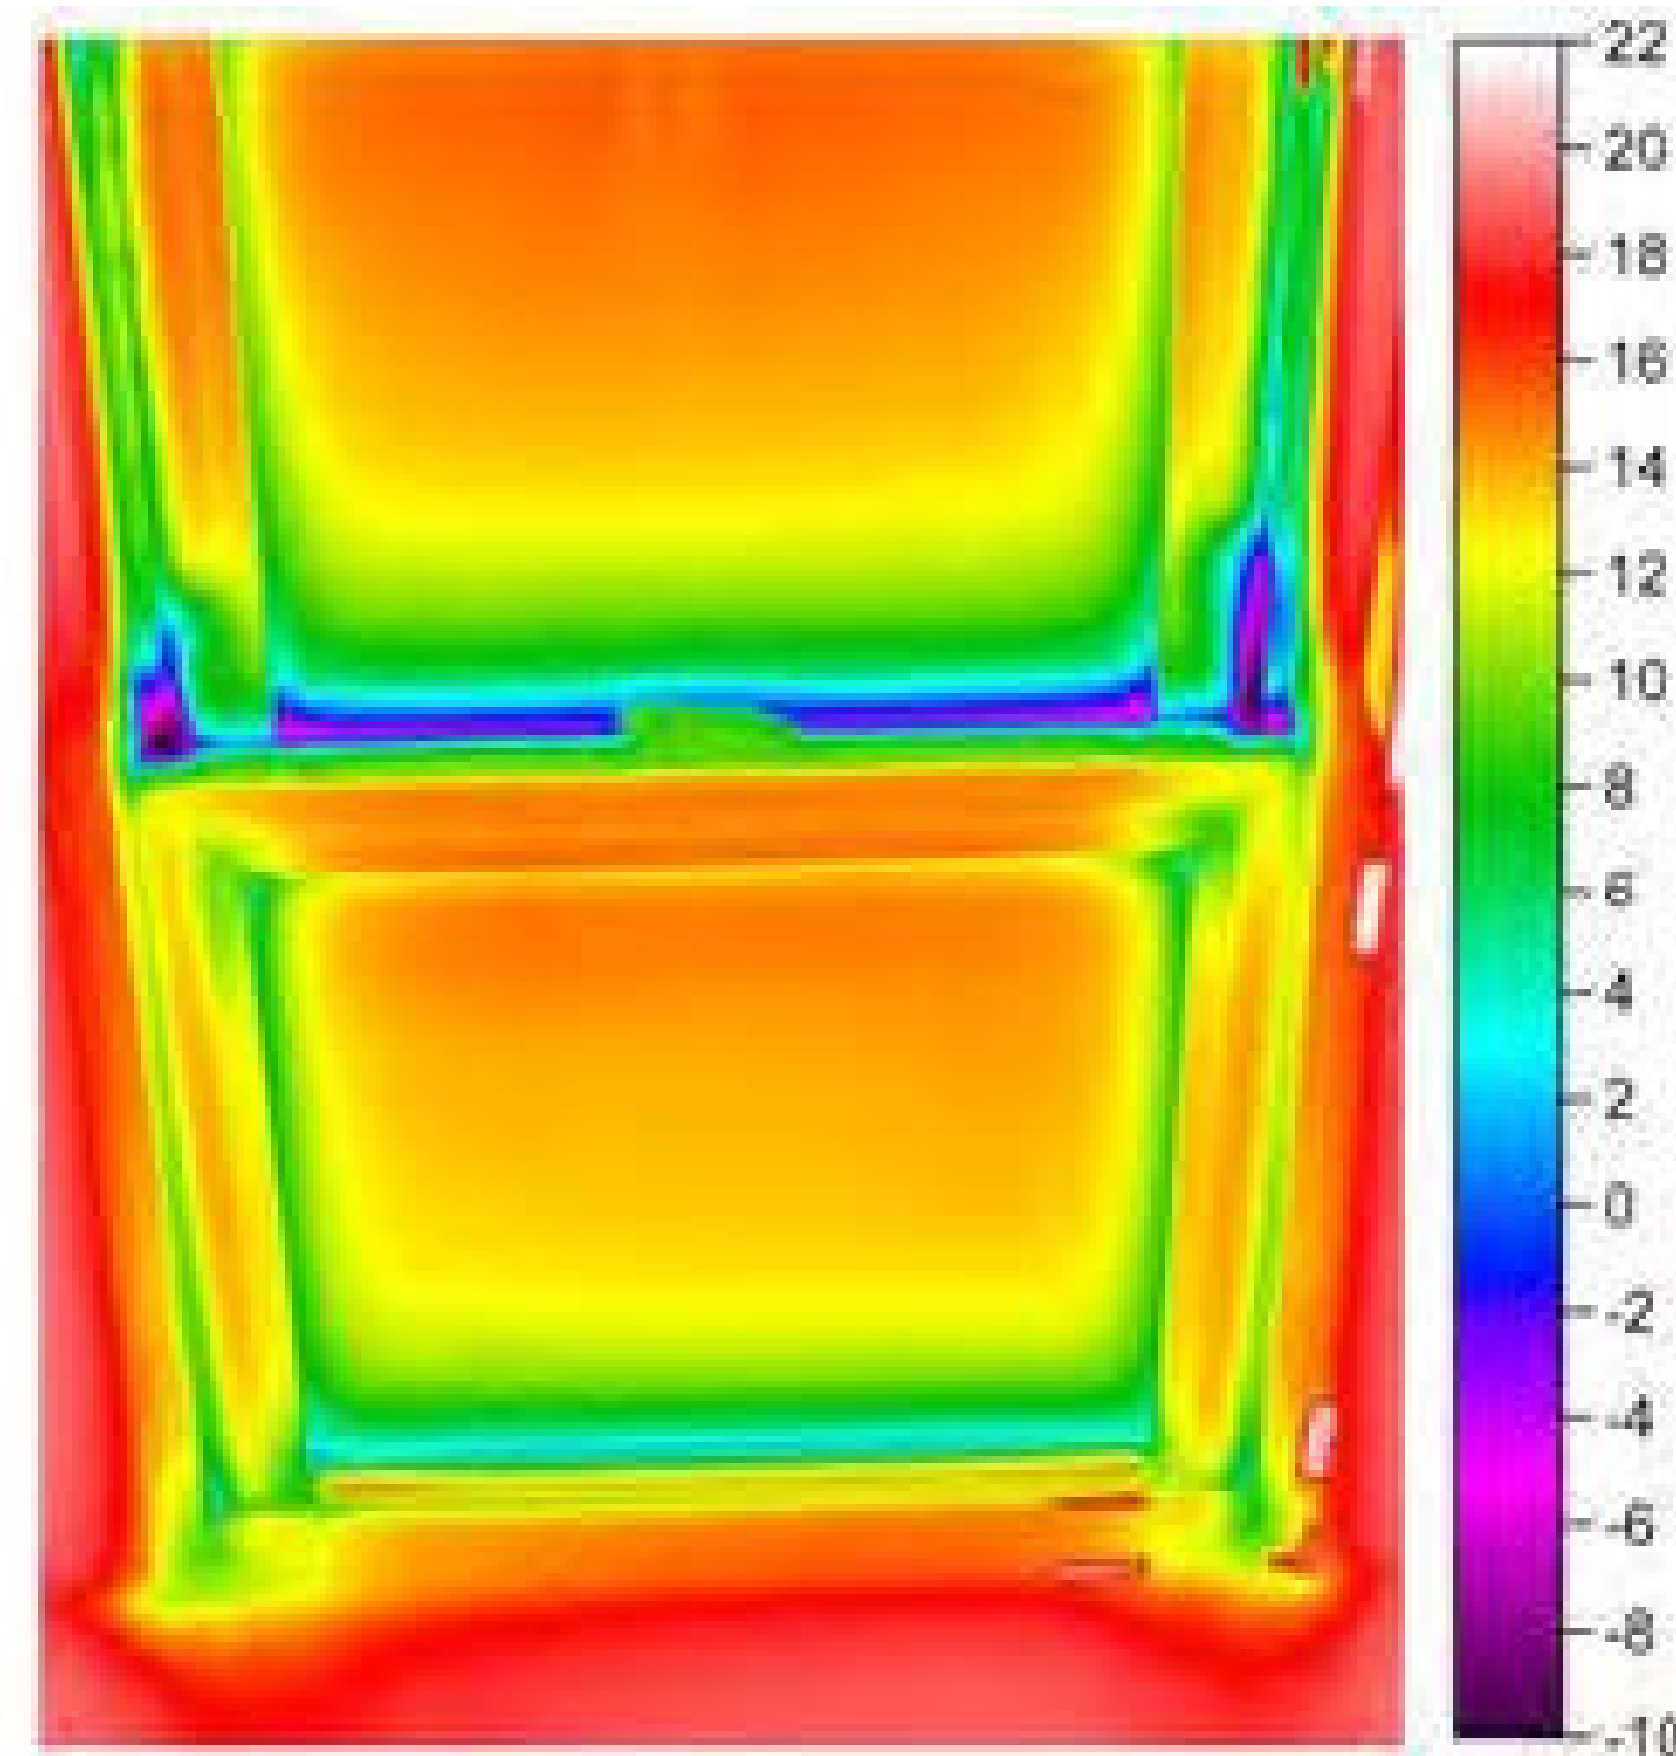


Window Thermal Properties Laboratory

Lawrence Berkeley National Lab



The Infrared Thermography Laboratory (IRLab) conducts detailed laboratory experiments on the thermal performance of windows and other insulated systems.

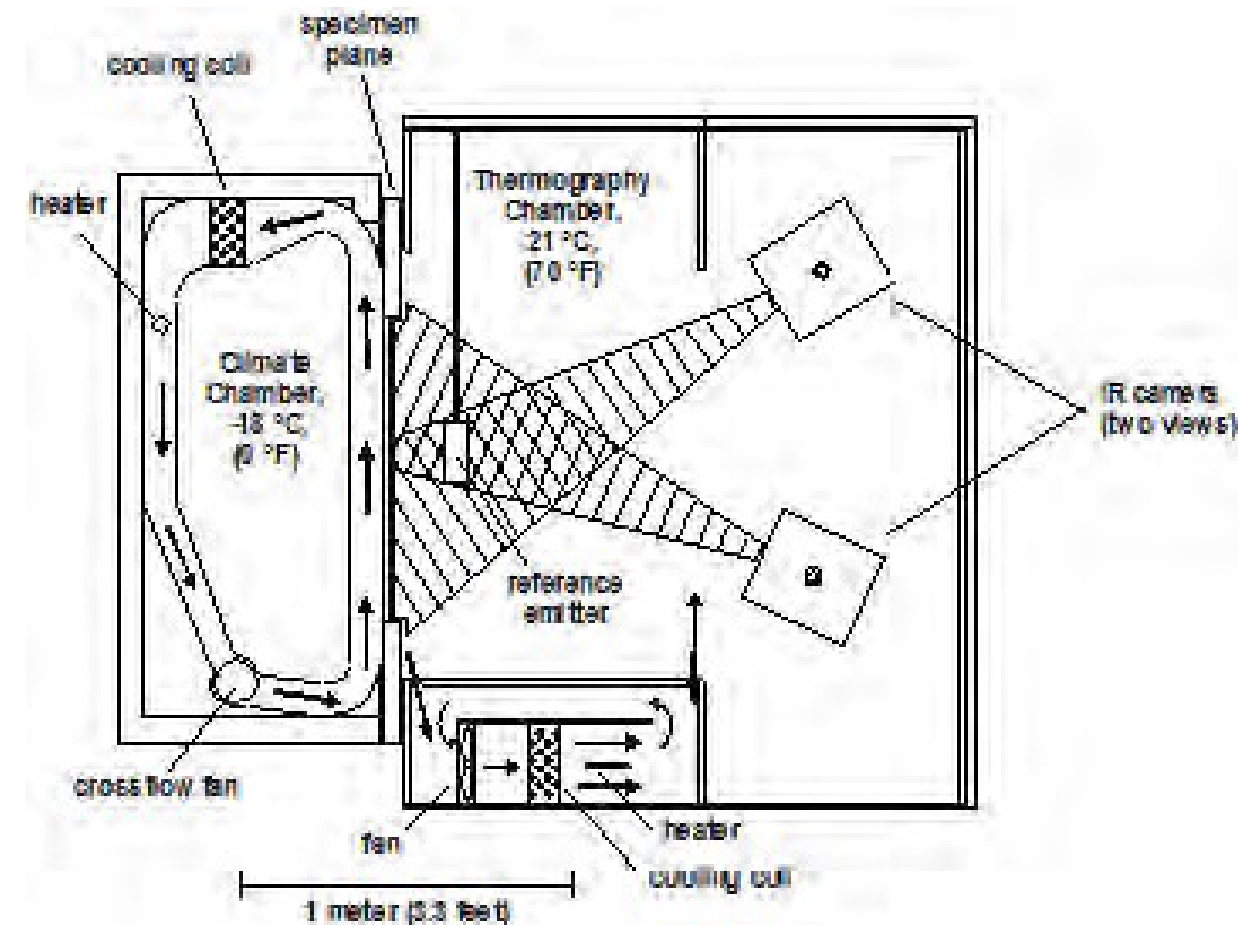

Environmental chambers simulate a long, cold winter night to test the performance of a window or another insulated system.



New products and technologies are tested to understand and validate their performance capabilities.

Window Thermal Properties Laboratory

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Building Technologies	<ul style="list-style-type: none">• MOWITT – Mobile Windows Thermal Test facility, studying single window, window framing and/or shading assemblies under realistic conditions including:<ul style="list-style-type: none">◦Thermal properties including conductive heat transfer (U-value), Solar Heat Gain Coefficient◦Visible Transmittance(VT)◦Hot plate thermal conductivity apparatus◦Handheld tools for in situ non-destructive assessment◦Machine tools for experimental apparatus or prototype fabrication
Energy Efficiency	<ul style="list-style-type: none">• MOWITT – Mobile Windows Thermal Test facility, studying single window, window framing and/or shading assemblies under realistic conditions including:<ul style="list-style-type: none">◦Thermal properties including conductive heat transfer (U-value), Solar Heat Gain Coefficient◦Visible Transmittance(VT)◦Hot plate thermal conductivity apparatus◦Handheld tools for in situ non-destructive assessment◦Machine tools for experimental apparatus or prototype fabrication
Material-Based	<ul style="list-style-type: none">• MOWITT – Mobile Windows Thermal Test facility, studying single window, window framing and/or shading assemblies under realistic conditions including:<ul style="list-style-type: none">◦Thermal properties including conductive heat transfer (U-value), Solar Heat Gain Coefficient◦Visible Transmittance(VT)◦Hot plate thermal conductivity apparatus◦Handheld tools for in situ non-destructive assessment◦Machine tools for experimental apparatus or prototype fabrication

Solar Optical Properties Laboratory

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov


W: <https://windows.lbl.gov/solar-optical-properties-laboratory>



The Solar Optical Properties laboratory characterizes solar optical properties of windows and window materials. It consists of several instruments, allowing measurements of optical properties in the solar range (300–2500 nm) at normal incidence as well as goniophotometric measurements for full resolution of incident and outgoing angles, with the ability to construct complete bi-directional scattering distribution function (BSDF) of a material.




The research activities enable development of complex fenestration systems (CFS) and new coatings for energy-efficient glazing and windows.

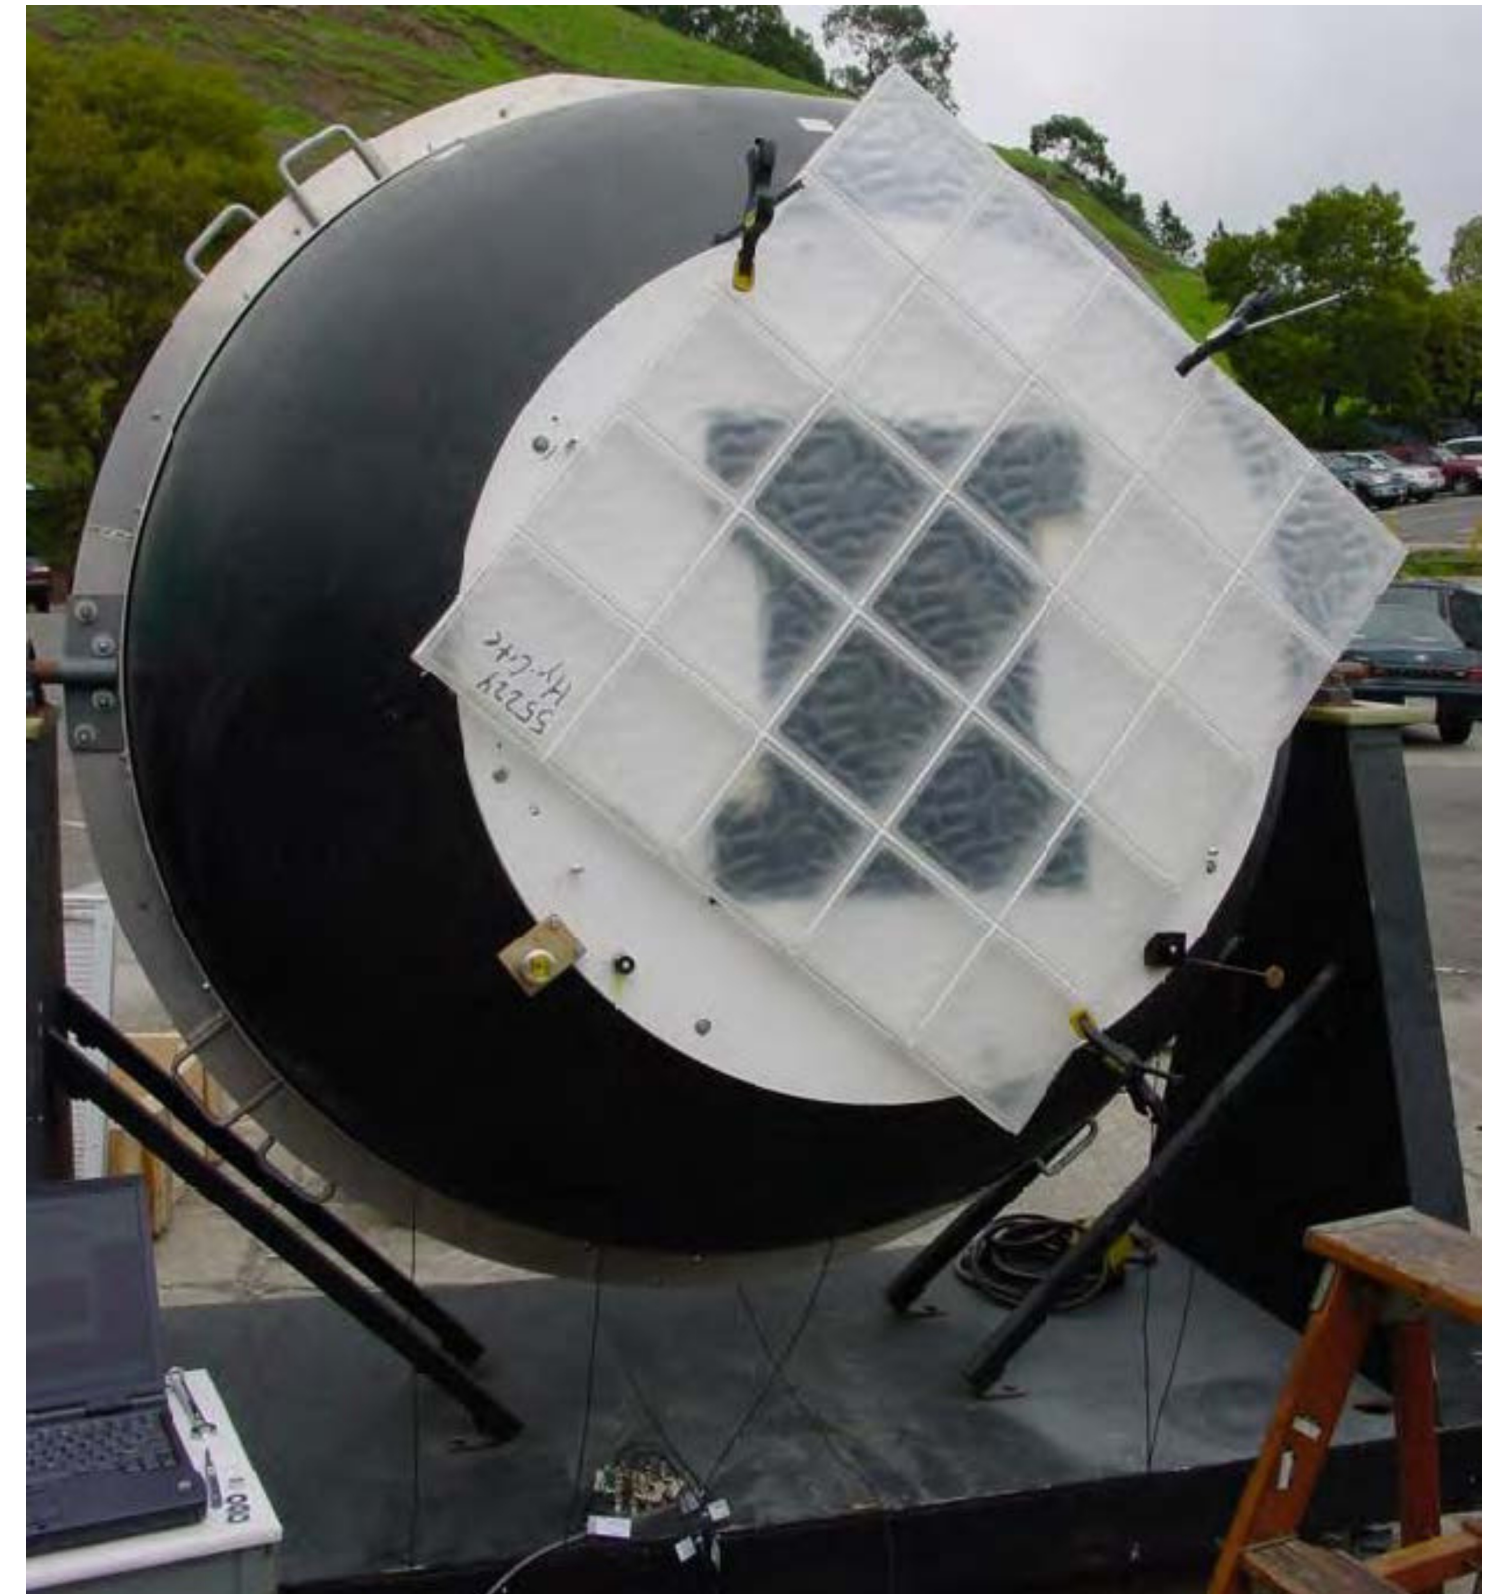

Solar Optical Properties Laboratory


Lawrence Berkeley National Lab

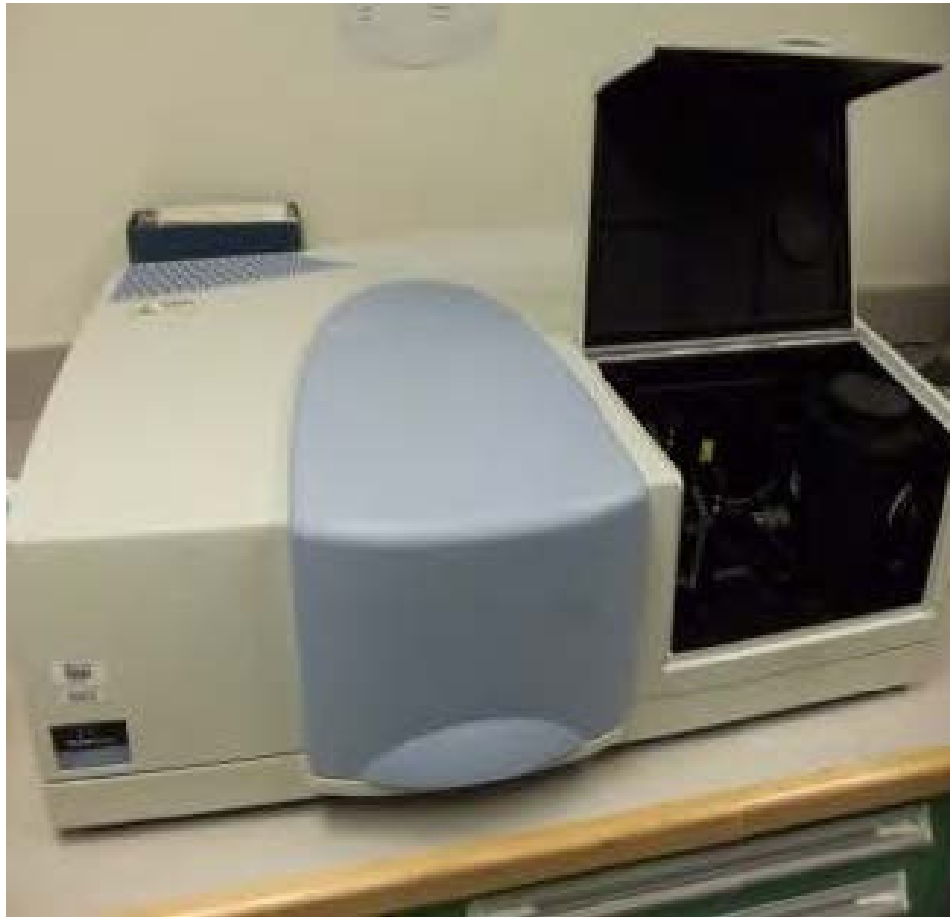

UV/Vis/NIR spectrophotometers with integrating spheres are used to measure transmittance and reflectance from 300nm – 2500nm. Using the 270mm sphere it is possible to adhere to the NFRC 300-2017 standard for measurement of thick translucent samples.



Measurement of emissivity is done in the thermal IR range (2-40 micron) using FTIR. An integrating sphere with MCT detector gives wavelength dependent results for scattering samples. A broadband emissometer complements the FTIR to get integrated measurements.

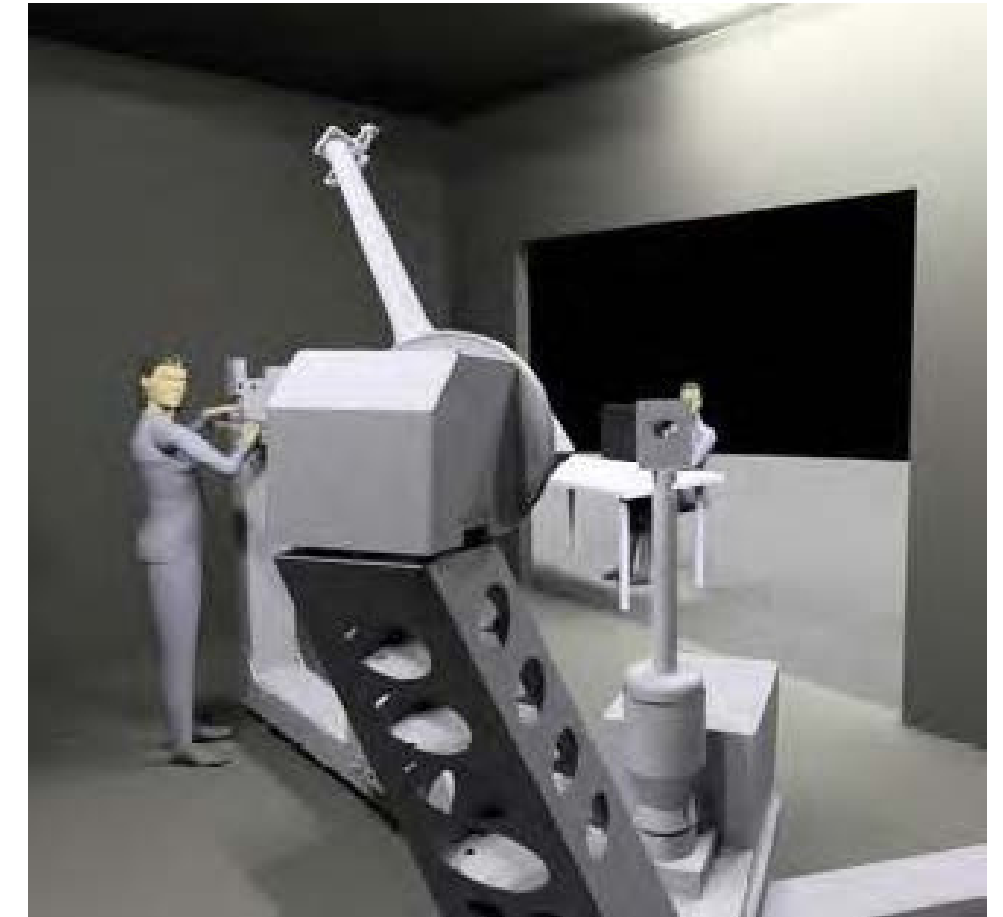

Rendering by Peter Apian-Bennewit

The large goniometer can measure the bi-directional scattering distribution of samples for transparent samples for any combination of incident and outgoing direction. 4 broadband detectors provides integrated information over the solar spectrum.

Solar Optical Properties Laboratory

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Building Technologies	<ul style="list-style-type: none">• Characterization of optical properties of glazing materials, window films, shading materials, thermochromic materials, complex fenestration assemblies, new coatings for glazing and windows, and development of measurement standards. Tests include:<ul style="list-style-type: none">◦Solar optical (UV/Vis/NIR) reflectance and transmittance◦Thermal emissivity of low-e coatings◦BSDF of scattering glazing materials◦Development of optically complex fenestration systems (CFS);◦Development of new coatings for energy-efficient glazing and windows◦Data for simulation tools.
Energy Efficiency	<ul style="list-style-type: none">• Characterization of optical properties of glazing materials, window films, shading materials, thermochromic materials, complex fenestration assemblies, new coatings for glazing and windows, and development of measurement standards. Tests include:<ul style="list-style-type: none">◦Solar optical (UV/Vis/NIR) reflectance and transmittance◦Thermal emissivity of low-e coatings◦BSDF of scattering glazing materials◦Development of optically complex fenestration systems (CFS);◦Development of new coatings for energy-efficient glazing and windows◦Data for simulation tools.
Material-Based	<ul style="list-style-type: none">• Characterization of optical properties of glazing materials, window films, shading materials, thermochromic materials, complex fenestration assemblies, new coatings for glazing and windows, and development of measurement standards. Tests include:<ul style="list-style-type: none">◦Solar optical (UV/Vis/NIR) reflectance and transmittance◦Thermal emissivity of low-e coatings◦BSDF of scattering glazing materials◦Development of optically complex fenestration systems (CFS);◦Development of new coatings for energy-efficient glazing and windows◦Data for simulation tools.

Refrigeration Testing Facility

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov

W: <https://energyanalysis.lbl.gov/refrigerator-test-chamber>



This testing facility primarily evaluates the performance of refrigerator-freezers, refrigerators, freezers, wine chillers, and ice makers. It is a temperature and humidity controlled environmental room that provides controlled environmental conditions.



New technologies can be evaluated to assess increased efficiency performance and potential standardized test protocol modifications.



Refrigeration Testing Facility

Lawrence Berkeley National Lab



The refrigeration testing facility is a full scale test facility for assessing the energy performance of refrigerating appliances under standard and custom operating conditions.



The test chamber can accommodate up to four full-size refrigerators, freezers, wine chillers, ice makers, or other refrigerating appliances. Room temperature range is 40F to 120F, and relative humidity range is 30% to 95%.



Testing capabilities include standard energy efficiency tests, evaluation of new and advanced designs, as well as simulation of common field use cases.

Refrigeration Testing Facility

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Building Technologies	<ul style="list-style-type: none">• Temperature and humidity controlled environmental room for studies on refrigeration products such as refrigerator-freezers, refrigerators, freezers, wine chillers, ice makers, other refrigeration products and equipment. Tests include:<ul style="list-style-type: none">◦Performance testing (e.g. power consumption, efficiency evaluation)◦Testing available under standardized test protocols
Energy Efficiency	<ul style="list-style-type: none">• Temperature and humidity controlled environmental room for studies on refrigeration products such as refrigerator-freezers, refrigerators, freezers, wine chillers, ice makers, other refrigeration products and equipment. Tests include:<ul style="list-style-type: none">◦Performance testing (e.g. power consumption, efficiency evaluation)◦Testing available under standardized test protocols

Psychrometric Test Chamber

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov


W: <https://energyanalysis.lbl.gov/psychrometric-test-chamber>



The Psychrometric Test Chamber evaluates the performance of air conditioners and heat pumps, as well as other air conditioning and refrigeration products and equipment.



New technologies can be evaluated to assess increased efficiency performance and potential standardized test protocol modifications.

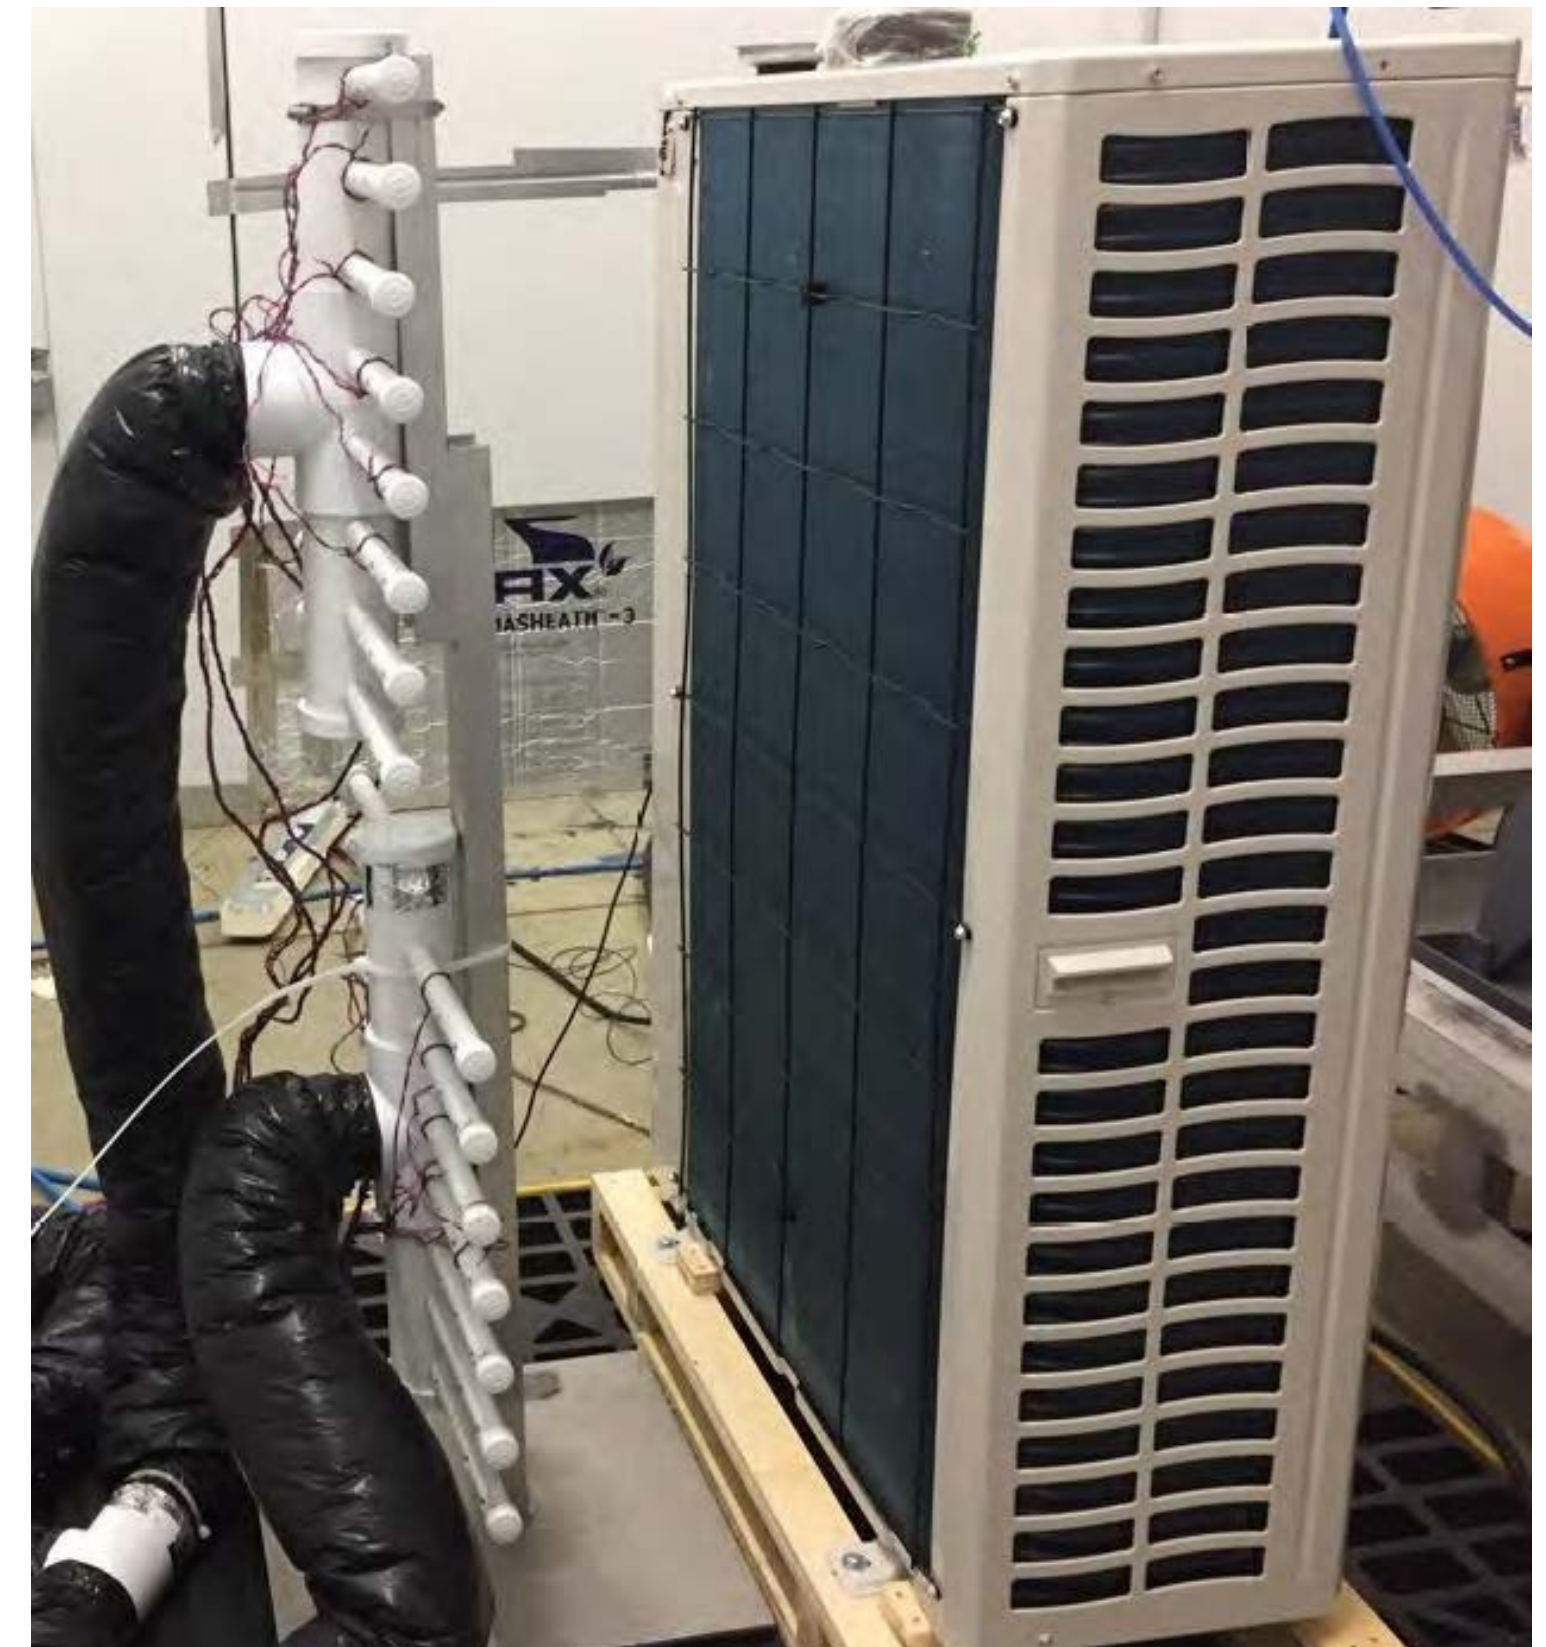

Psychrometric Test Chamber – A/C & Heat Pumps

Lawrence Berkeley National Lab



The Psychrometric Test Chamber can evaluate the performance of central air conditioners and heat pumps with cooling capacity in range of 6,000 to 90,000 Btu/h (1/2 to 7 1/2 rated tons), and with heating capacity in range of 6,000 to 60,000 (1/2 to 5 rated tons).



This full-scale test facility assesses energy performance of residential and light commercial central air conditioners and heat pumps, including mini-split units, to optimize efficiency.



Side-by-side indoor and outdoor chambers control temperature (-20° – 120°F), humidity (15 – 90%) and air flow independently.

Psychrometric Test Chamber – A/C & Heat Pumps

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Building Technologies	<ul style="list-style-type: none">• Temperature and humidity controlled environmental chambers for studies on air conditioners, heat pumps, and split system products:<ul style="list-style-type: none">◦Performance of equipment – energy consumption, efficiency◦Side-by-side indoor and outdoor chambers, with temperature, humidity and air flow controlled independently◦Testing available under standardized test protocols
Energy Efficiency	<ul style="list-style-type: none">• Temperature and humidity controlled environmental chambers for studies on air conditioners, heat pumps, and split system products:<ul style="list-style-type: none">◦Performance of equipment – energy consumption, efficiency◦Side-by-side indoor and outdoor chambers, with temperature, humidity and air flow controlled independently◦Testing available under standardized test protocols

Balanced Ambient Calorimeter Test Chamber

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov

W: <https://energyanalysis.lbl.gov/balanced-ambient-calorimeter-test-chamber>



The Balanced Ambient Calorimeter Test Chamber assesses the performance of room air conditioners, packaged terminal air conditioners and packaged terminal heat pumps, as well as other air conditioning and refrigeration products and equipment.




New technologies can be evaluated to assess increased efficiency performance and potential standardized test protocol modifications.



Balanced Ambient Calorimeter Test Chamber

Lawrence Berkeley National Lab

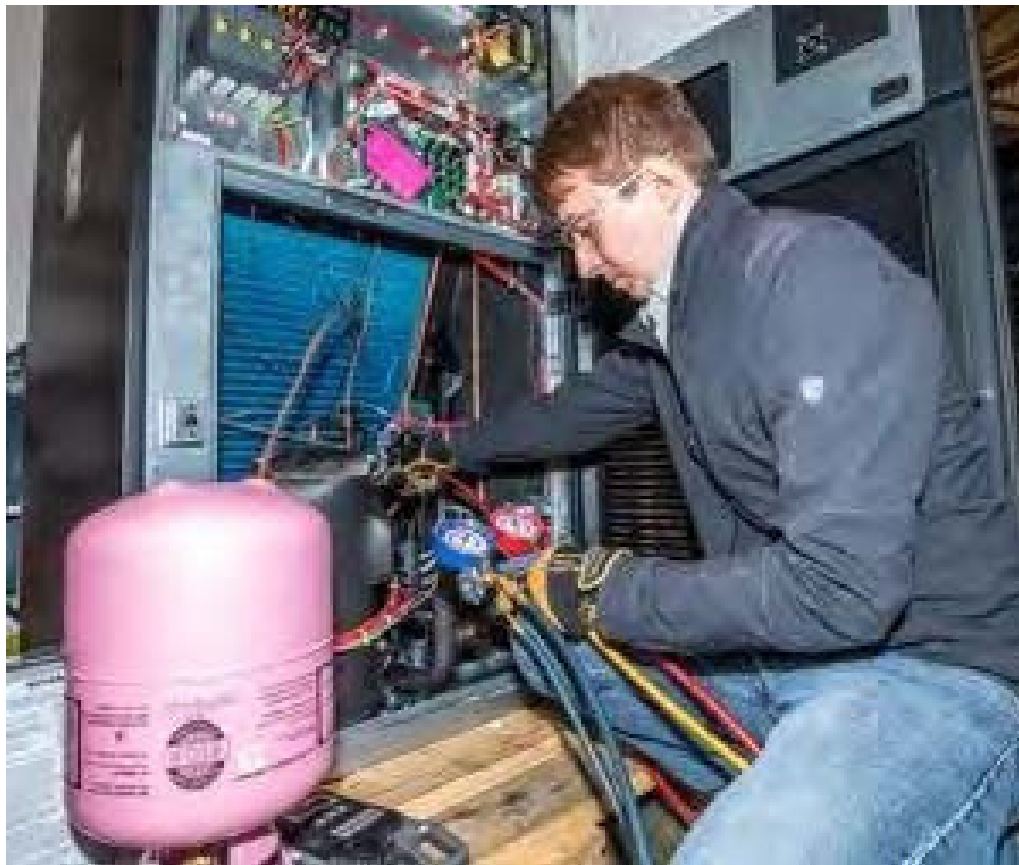

The Balanced Ambient Calorimeter Test Chamber's is primarily used to evaluate the performance of room air conditioners and packaged terminal heat pumps in the cooling capacity range of 6,000 to 42,000 Btu/h (1/2 to 3 1/2 rated tons).



Tests portable air conditioners, dehumidifiers, and walk-in coolers and freezers.



Testing in indoor and outdoor chambers enables temperature (10° - 120°F) and humidity (10 - 90%) control to research air conditioning technology for energy optimization and efficiency.

Balanced Ambient Calorimeter Test Chamber

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Building Technologies	<ul style="list-style-type: none">• Temperature and humidity controlled environmental chamber for studies of packaged room air conditioners, terminal unit air conditioners, dehumidifiers, walk in coolers and freezer products:<ul style="list-style-type: none">◦Performance of equipment – energy consumption, efficiency◦Side-by-side indoor and outdoor chambers, with temperature, humidity and air flow controlled independently◦Testing available under standardized test protocols
Energy Efficiency	<ul style="list-style-type: none">• Temperature and humidity controlled environmental chamber for studies of packaged room air conditioners, terminal unit air conditioners, dehumidifiers, walk in coolers and freezer products:<ul style="list-style-type: none">◦Performance of equipment – energy consumption, efficiency◦Side-by-side indoor and outdoor chambers, with temperature, humidity and air flow controlled independently◦Testing available under standardized test protocols

Reacting Flow Applications Laboratory

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov

W: <https://industrialapplications.lbl.gov/content/reacting-flowapplications-lab>



Developing novel, fuel-flexible heat generation technologies for power and process system, and partnering with private organizations to advance residential and industrial technologies.




Reacting Flow Applications Laboratory

Lawrence Berkeley National Lab



The Reacting Flow Applications Laboratory partners with private organizations to advanced residential and industrial combustion technologies.

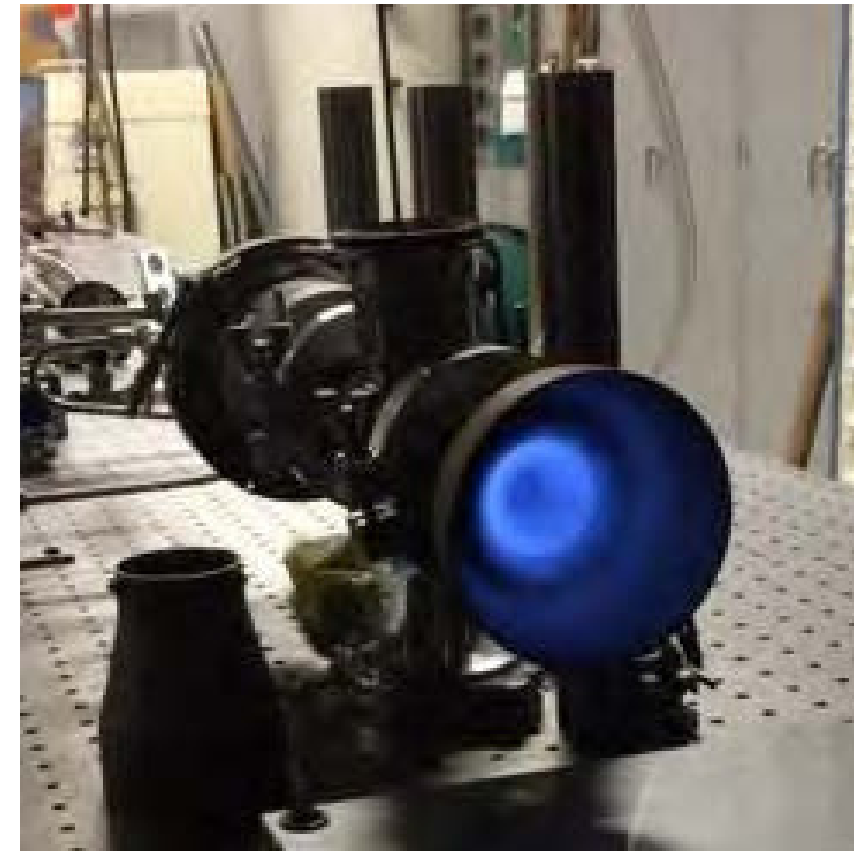

The group works to advance combustion power system and validate performance and emissions.



Novel, fuel-flexible burners for power and process system are developed in the Reacting Flow Applications Laboratory.

Reacting Flow Applications Laboratory

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Building Technologies	<ul style="list-style-type: none">• Residential and industrial heating and power systems (e.g. water heaters, furnaces, microturbine generators, combined heat and power systems). Tests include:<ul style="list-style-type: none">◦Design, development and validation of open flow reacting systems◦Characterization of advanced biofuel and bioproducts◦Product performance and emissions validation and optimization
Building Technologies	<ul style="list-style-type: none">• Gas appliances, testing includes:<ul style="list-style-type: none">◦Performance (e.g. thermal efficiency, heat output, etc.) and Emissions (NOX, CO, CO2, O2, SOX, PM2.5)
Building Technologies	<ul style="list-style-type: none">• Combustion burner development and validation (gas and liquid fueled).Testing Includes:<ul style="list-style-type: none">◦Performance (e.g. thermal efficiency, heat output, flame flow field), Emissions (NOX, CO, CO2, O2, SOX, PM2.5), and optimization
Building Technologies	<ul style="list-style-type: none">• Combustion power system development and validation (gas and liquid fueled). Testing includes:<ul style="list-style-type: none">◦Performance (e.g. thermal efficiency, heat output, recuperation), Emissions (NOX, CO, CO2, O2, SOX, PM2.5), and optimization
Energy Efficiency	<ul style="list-style-type: none">• Residential and industrial heating and power systems (e.g. water heaters, furnaces, microturbine generators, combined heat and power systems). Tests include:<ul style="list-style-type: none">◦Design, development and validation of open flow reacting systems◦Characterization of advanced biofuel and bioproducts◦Product performance and emissions validation and optimization
Energy Efficiency	<ul style="list-style-type: none">• Gas appliances, testing includes:<ul style="list-style-type: none">◦Performance (e.g. thermal efficiency, heat output, etc.) and Emissions (NOX, CO, CO2, O2, SOX, PM2.5)
Energy Efficiency	<ul style="list-style-type: none">• Combustion burner development and validation (gas and liquid fueled).Testing Includes:<ul style="list-style-type: none">◦Performance (e.g. thermal efficiency, heat output, flame flow field), Emissions (NOX, CO, CO2, O2, SOX, PM2.5), and optimization

Reacting Flow Applications Laboratory

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Energy Efficiency	<ul style="list-style-type: none">• Combustion power system development and validation (gas and liquid fueled).Testing includes:<ul style="list-style-type: none">◦Performance (e.g. thermal efficiency, heat output, recuperation), Emissions (NOX, CO, CO2, O2, SOX, PM2.5), and optimization

Biomass Combustion Emissions and Efficiency Testing Lab

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov


W: <https://cookstoves.lbl.gov/stovelab>



This state-of-the-art biomass combustion testing facility is equipped with redundant sensors integrated with data management software allowing rapid data validation.



Efficient reliable operations and measurement results are enabled with a documented quality assurance plan, standard operating procedures, and testing protocols.

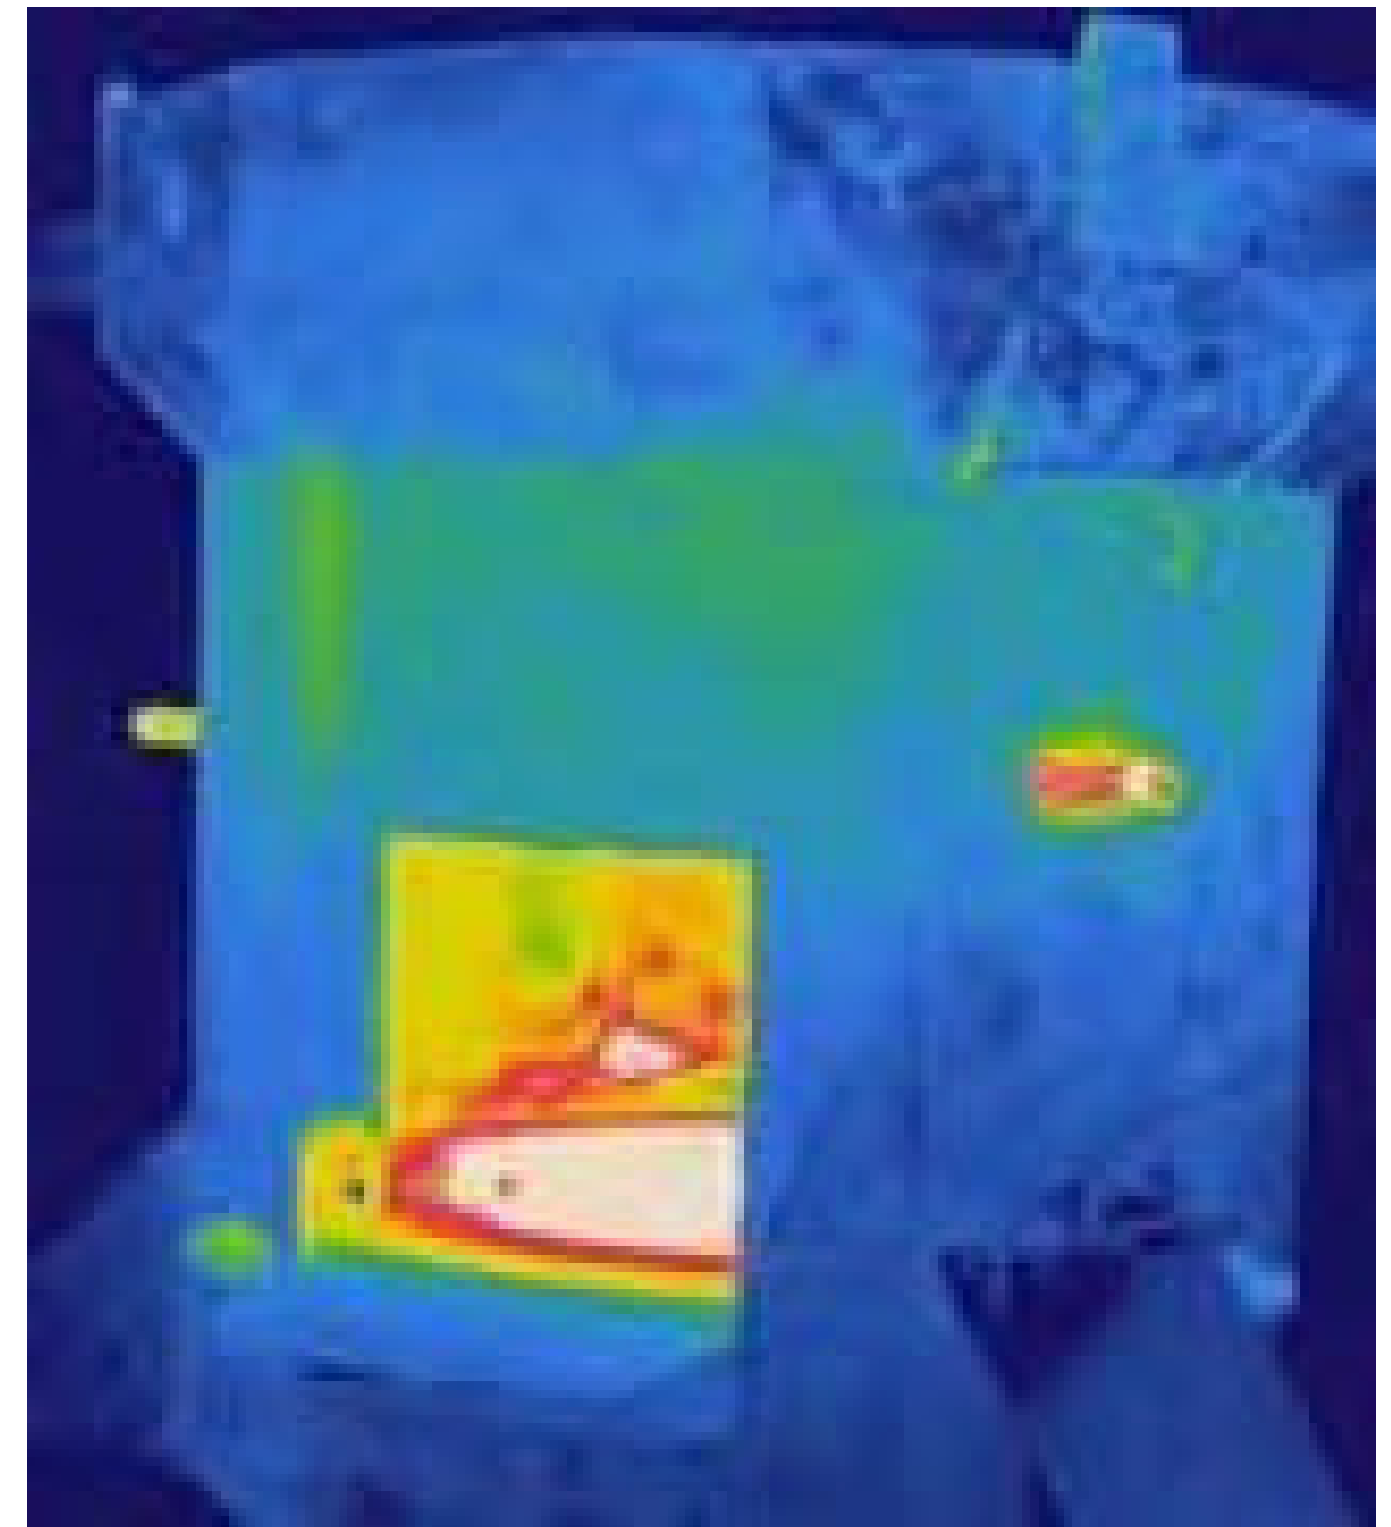

Biomass Combustion Emissions and Efficiency Testing Lab

Lawrence Berkeley National Lab




The Biomass Combustion Emissions and Efficiency Testing Lab is focused on testing small biomass combustion devices. It conducts standard and advanced testing for small-scale biomass heat and power technologies, and biomass technology performance and emissions validation.



Lab and field testing standards are developed and evaluated to validate technology performance and accelerate private company innovation.

New proposed simplified testing methods can be validated against very high quality reliable laboratory testing measurements under a variety of controlled conditions.

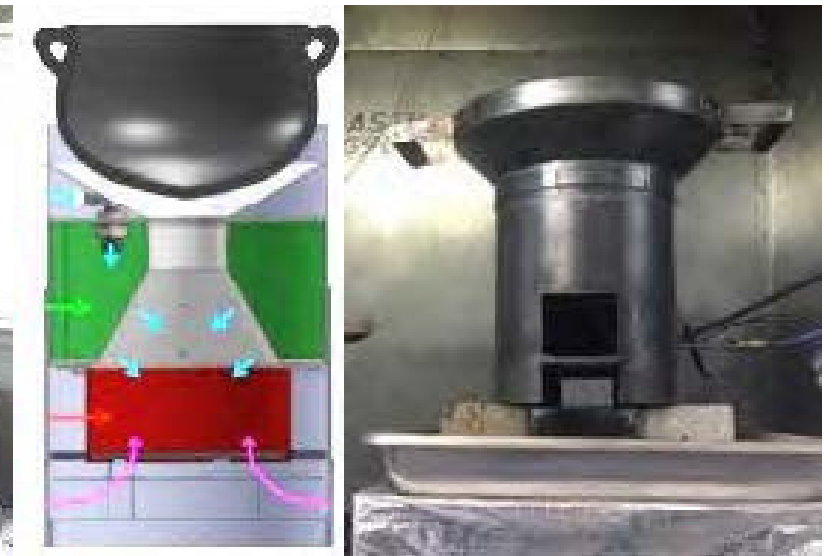

Novel biomass heat-generation technologies are designed, built, and evaluated in laboratory conditions, under standard and advanced test protocols. Technology applications range in both developing and industrial countries.

Biomass Combustion Emissions and Efficiency Testing Lab

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Building Technologies	<ul style="list-style-type: none">• Residential woody biomass cookstoves, and wood-fired space-heating stoves. Testing includes:<ul style="list-style-type: none">◦Performance evaluation◦Emissions testing, including PM2.5 mass, size distribution (5nm to 50µm), and gaseous emissions, at 1Hz.
Building Technologies	<ul style="list-style-type: none">• Biomass gasifier generators and torrefaction technologies Testing includes:<ul style="list-style-type: none">◦Real time performance (e.g., thermal efficiency, heat output, etc.) and emissions (NOX, CO, CO2, O2, SOX, black carbon, size resolved PM, PM2.5)
Energy Efficiency	<ul style="list-style-type: none">• Residential woody biomass cookstoves, and wood-fired space-heating stoves. Testing includes:<ul style="list-style-type: none">◦Performance evaluation◦Emissions testing, including PM2.5 mass, size distribution (5nm to 50µm), and gaseous emissions, at 1Hz.
Energy Efficiency	<ul style="list-style-type: none">• Biomass gasifier generators and torrefaction technologies Testing includes:<ul style="list-style-type: none">◦Real time performance (e.g., thermal efficiency, heat output, etc.) and emissions (NOX, CO, CO2, O2, SOX, black carbon, size resolved PM, PM2.5)

Range Hood Test Facility

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov

W: <https://energyanalysis.lbl.gov/range-hood-test-facility>



The Range Hood Test Facility enables performance testing of kitchen ventilation appliances and development and validation of both lab and field test methods.



Range Hood Test Facility

Lawrence Berkeley National Lab



The facility enables characterization of pollutant emissions associated with cooking devices and cooking activities using real-world cooking equipment with carefully controlled procedures. Performance measures include airflow, sound pressure and pollutant capture efficiency.



The facility can be instrumented to measure size-resolved particles, nitrogen oxides, organics ranging from very volatile irritant acids and aldehydes to semi-volatile polycyclic aromatic hydrocarbons. A recent project examined the effectiveness of carbon filters in recirculating range hoods to remove particles and organics.



Projects have included development of an ASTM standard method for capture efficiency, performance assessment of an automatic smart range hood, comparison of over-the-range microwave exhaust devices to standard range hoods, and determination of factors that impact capture efficiency performance.

Range Hood Test Facility

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Building Technologies	<ul style="list-style-type: none">• Testing of range hood airflows, sound, and capture efficiency for pollutants from cooking burners and food preparation / cooking in both laboratory and field conditions.<ul style="list-style-type: none">◦Application of test methods to evaluate performance of novel product designs and features.
Energy Efficiency	<ul style="list-style-type: none">• Testing of range hood airflows, sound, and capture efficiency for pollutants from cooking burners and food preparation / cooking in both laboratory and field conditions.<ul style="list-style-type: none">◦Application of test methods to evaluate performance of novel product designs and features.

Indoor Environment Facilities

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov

W: <https://energyanalysis.lbl.gov/indoor-air-quality-laboratory-facilities>



Our facilities feature 100m³ of reconfigurable rooms, room to bench scale chambers, analytical laboratory capabilities for varied gaseous and semi-volatile organic and inorganic analytes, aerosol monitors, and access to Berkeley Lab user facilities. These resources are used to study the factors that impact emissions from indoor pollutant sources such as materials, combustion, cooking, electronics and consumer products; physical-chemical processes that impact exposure; performance of novel air cleaning technologies; and air quality sensing devices among other applications. The facilities enable study of sources and air cleaning technologies in commercial and residential buildings, large public spaces including airports, and transport environments including aircraft.



Indoor Environment Facilities

Lawrence Berkeley National Lab



We develop custom test methods and experimental configurations to test filtration and air cleaning devices for building and transportation environments. Test facilities include FLEXLAB chambers, reconfigurable rooms and lab scale chambers.



Using these facilities, we have studied primary and secondary emissions from cleaning products and office equipment, secondhand and thirdhand tobacco smoke, photo-catalytic air cleaning materials, sorption of surrogate chemical warfare agents, aircraft air cleaning systems, chemical reactions on building air filters and air sensing technologies among many other applications.



Our air sampling equipment and analytical laboratories enable quantification of organic gases ranging from very volatile irritant aldehydes to semivolatile flame retardants and plasticizers, organic acids and inorganics by ion chromatography. We track organics in real-time using proton transfer mass spectrometry and have instrumentation to measure size-resolved particles, ozone, nitrogen oxides, and other hazardous air pollutants.

Indoor Environment Facilities

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Building Technologies	<ul style="list-style-type: none">Indoor environment sensing, air cleaning technologies, emissions testing of materials, electronics, and products. Tests include:<ul style="list-style-type: none">Quantification of primary emissions from indoor materials and products.Chemical transformations and interactions under typical indoor environment conditions.Performance of consumer and enterprise indoor air quality sensors and monitors.Performance of novel air cleaning technologies and devices.Elucidation of physical-chemical processes that impact transformations and fate of chemical hazards in indoor environments.
Material-Based	<ul style="list-style-type: none">Indoor environment sensing, air cleaning technologies, emissions testing of materials, electronics, and products. Tests include:<ul style="list-style-type: none">Quantification of primary emissions from indoor materials and products.Chemical transformations and interactions under typical indoor environment conditions.Performance of consumer and enterprise indoor air quality sensors and monitors.Performance of novel air cleaning technologies and devices.Elucidation of physical-chemical processes that impact transformations and fate of chemical hazards in indoor environments.

Battery Research & Testing Facility

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov

W: <https://eta.lbl.gov/research-development/batteries-fuel-cells>



The LBNL battery test facility has a complete set of capabilities for the fabrication of cathodes and anodes for producing hermetically sealed coin cells and pouch cells under inert atmospheric conditions.

The LBNL battery testing facility consists of over 300 battery cycling channels capable of cycling cells between 0 and 5 V at 15 micro amps to 5 amps. The LBNL battery research and diagnostics facility consist of state of the art diagnostics capabilities for surface and bulk analysis.

The battery research and testing team performs joint research with colleagues across the LBNL campus including those at the major Lab user facilities, including the ALS, NERSC, NCEM, and the Molecular Foundry.

The energy storage program has established a streamline methodology for achieving rapid contract approval from the DOE (Calcharge).



Battery Research & Testing Facility


Lawrence Berkeley National Lab



Over 300 battery cycling channels for coin and pouch cells.



The battery research and diagnostics capabilities allow for state of the art diagnostics tests in inert atmospheres.

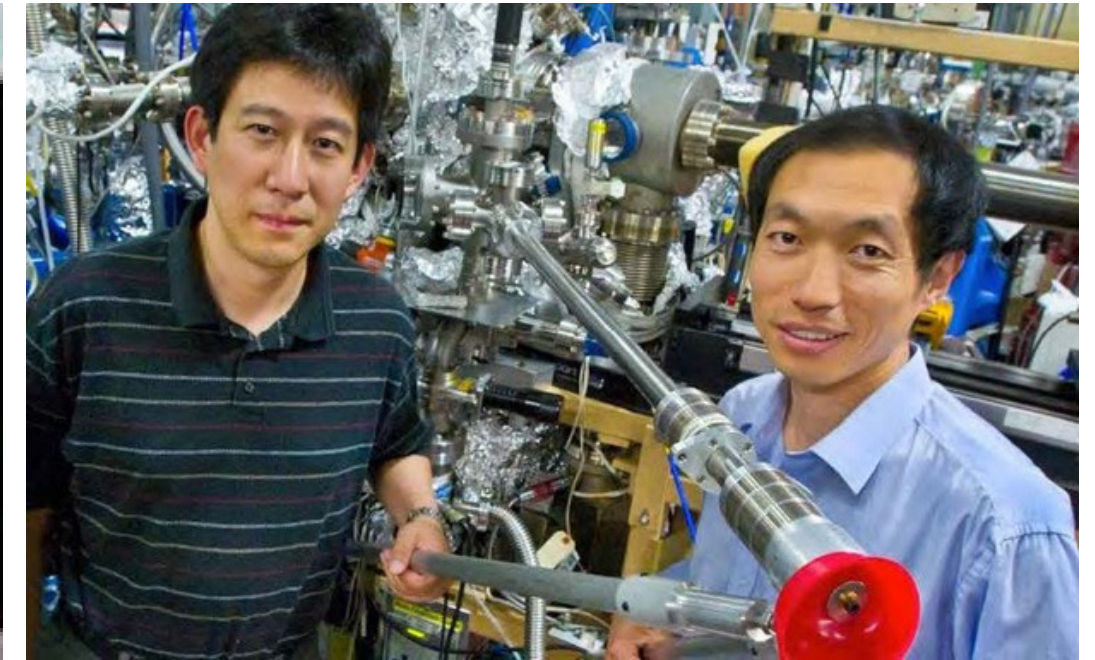

Experience and access to the Advanced Light Source.

Battery Research & Testing Facility

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Energy Storage	<ul style="list-style-type: none">• Testing of most flow batteries and hybrid systems, all ion batteries (Graphite, Si, LTO/NCM, LFP, DRX, Ni-rich NCM, pouch/coin cells, half/full cells), fuel cells and electrolyzers (PEM and SOFC). Tests include:<ul style="list-style-type: none">◦Physical characterization of materials (SEM, BET, PSA, XRD)◦Mechanical properties of electrodes (peel tests, pull tests, bend tests)◦Electrochemical performance of cells (HPPC tests, GITT)◦Electrochemical performance of individual electrodes (reference electrodes with EIS)◦Rate performance of electrodes and cells◦Application of USABC recommended cycling conditions and data analysis◦Cycle life testing◦Calendar life testing◦Dynamic cycling testing◦Fast charge protocol development
Material-Based	<ul style="list-style-type: none">• Testing of most flow batteries and hybrid systems, all ion batteries (Graphite, Si, LTO/NCM, LFP, DRX, Ni-rich NCM, pouch/coin cells, half/full cells), fuel cells and electrolyzers (PEM and SOFC). Tests include:<ul style="list-style-type: none">◦Physical characterization of materials (SEM, BET, PSA, XRD)◦Mechanical properties of electrodes (peel tests, pull tests, bend tests)◦Electrochemical performance of cells (HPPC tests, GITT)◦Electrochemical performance of individual electrodes (reference electrodes with EIS)◦Rate performance of electrodes and cells◦Application of USABC recommended cycling conditions and data analysis◦Cycle life testing◦Calendar life testing◦Dynamic cycling testing◦Fast charge protocol development

Demand to Grid Lab

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator


Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov

W: <https://drrc.lbl.gov/research-areas/testbed-tools-guides>




The Demand to Grid lab tests demand response signaling to devices. We have a simulated OpenADR2.0a/b server and client (VTN and VEN) and the following equipment:

- Communicating Thermostat for benchtop or FLEXLAB testing
- Open ADR embedded devices;
 - MelRok Smart Gateway
 - Universal Device - ISY994 PRO OADR
- DR Suitcase (Tstat, SmartPlug)

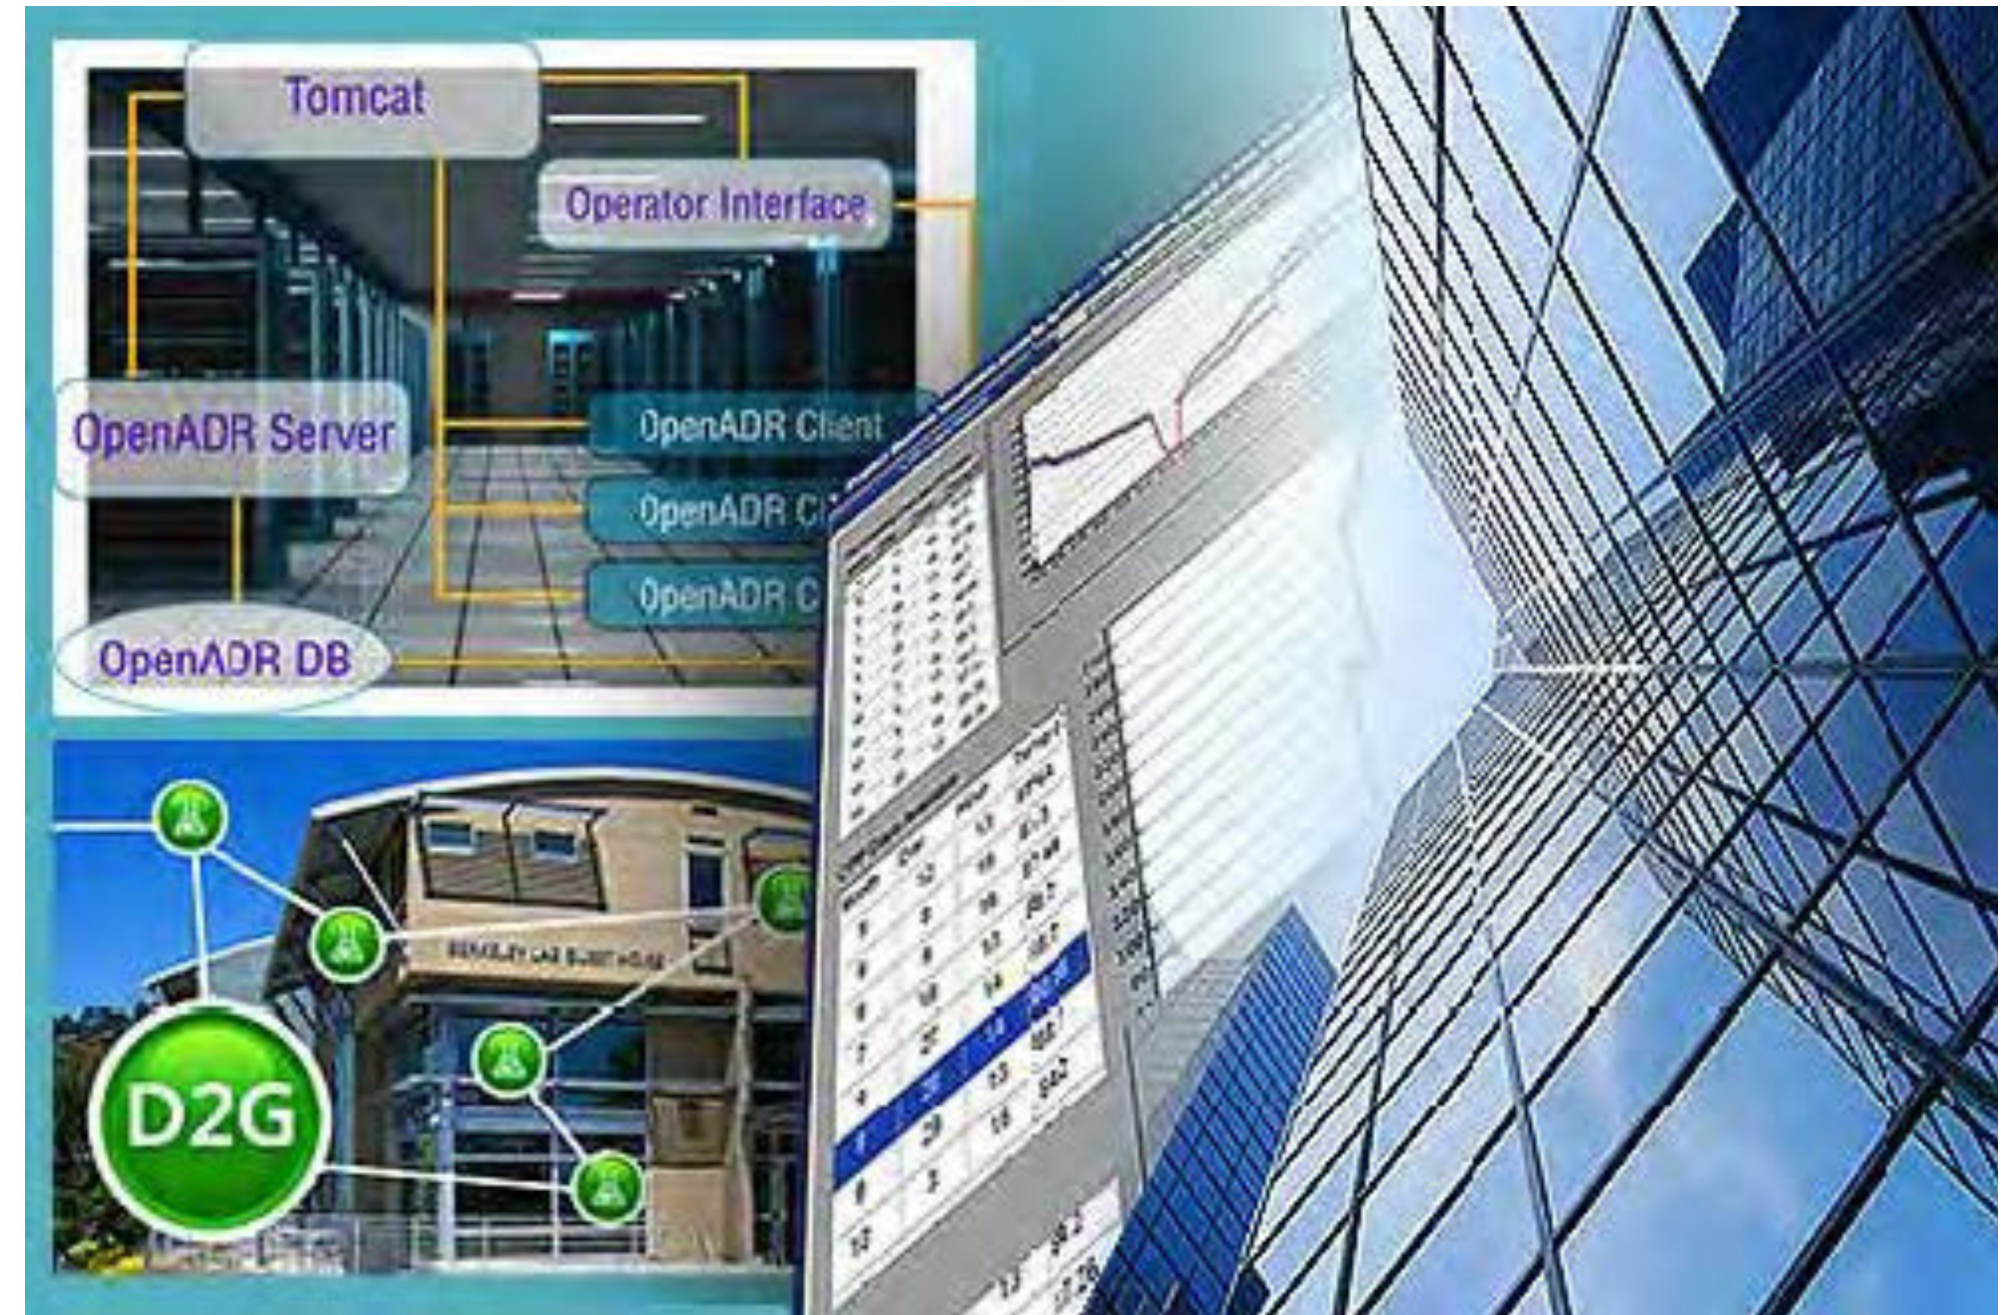


Demand to Grid Lab

Lawrence Berkeley National Lab

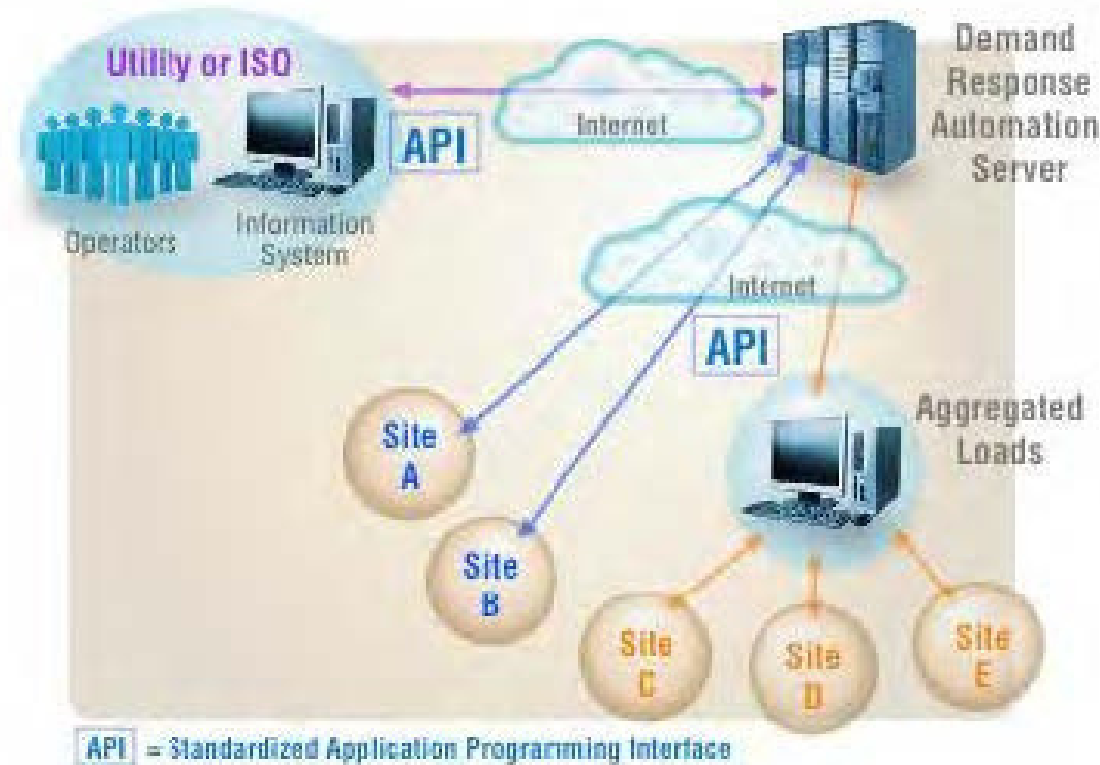

The Lab hosts an EPRI OpenADR 2.0a/b-compliant Virtual Top Node (VTN) a Demand Response Automation Server (DRAS) to create and communicate various DR signals (e.g., price, event, capacity) to different types of OpenADR device (e.g., OpenADR embedded, cloud-based and gateway).

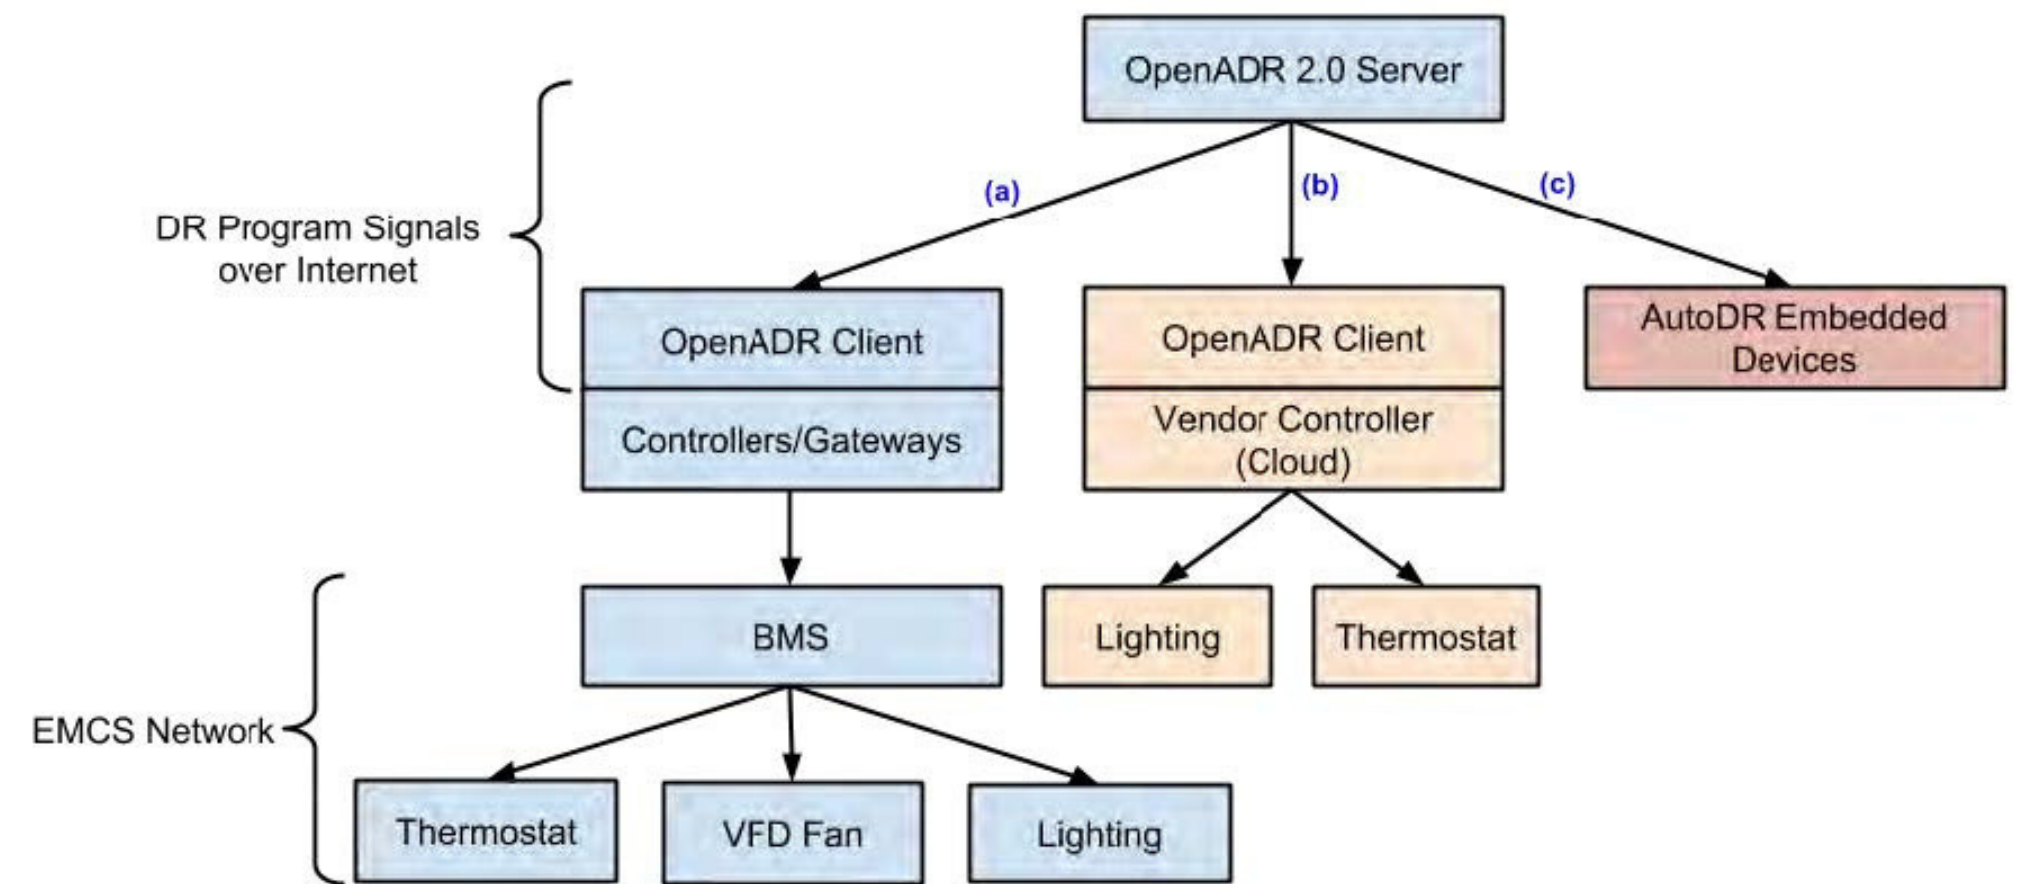

D2G lab allows the testing of various OpenADR products (a) Gateway/Auto-DR Controller, (b) Cloud-based OpenADR and (c) OpenADR embedded devices. The lab has measurement equipment suitable for conducting OpenADR communications test procedures. Additionally, this lab is particularly well suited for testing communication and control characteristics of the devices, including commutation latency, response speed, demand response performance and other metrics.

Demand to Grid Lab

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Building Technologies	<ul style="list-style-type: none">• Testing of OPENADR devices, including: OpenADR 2.0a/b VTN as a Demand Response Automation Server, OpenADR embedded or cloud-based devices (e.g., smart thermostat, smart lights and smart plug), smart energy manager gateway, and OpenADR communications and networks. Tests include:<ul style="list-style-type: none">◦DR signals testing (e.g., price, event, capacity)◦Communications evaluation (e.g. latency, other characteristics)◦Plug and play automation test of OpenADR compliant devices◦DR control sequences design, testing and evaluation
Internet of Things	<ul style="list-style-type: none">• Testing of OPENADR devices, including: OpenADR 2.0a/b VTN as a Demand Response Automation Server, OpenADR embedded or cloud-based devices (e.g., smart thermostat, smart lights and smart plug), smart energy manager gateway, and OpenADR communications and networks. Tests include:<ul style="list-style-type: none">◦DR signals testing (e.g., price, event, capacity)◦Communications evaluation (e.g. latency, other characteristics)◦Plug and play automation test of OpenADR compliant devices◦DR control sequences design, testing and evaluation
Grid Technologies	<ul style="list-style-type: none">• Testing of OPENADR devices, including: OpenADR 2.0a/b VTN as a Demand Response Automation Server, OpenADR embedded or cloud-based devices (e.g., smart thermostat, smart lights and smart plug), smart energy manager gateway, and OpenADR communications and networks. Tests include:<ul style="list-style-type: none">◦DR signals testing (e.g., price, event, capacity)◦Communications evaluation (e.g. latency, other characteristics)◦Plug and play automation test of OpenADR compliant devices◦DR control sequences design, testing and evaluation

Advanced Biofuels/ Bioproducts Process Development Unit (ABPDU)

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov

W: <https://abpdu.lbl.gov>



Enabling process R&D and scale-up of technologies that generate advanced biofuels, biomaterials, biochemicals, and other bioproducts. Generate g to kg scale product for testing in end-use applications.



Located in the San Francisco Bay Area's local bio-innovation hub allows users to tap into expertise and best practices that are required for the new generation of biofuels and bioproducts.



Helping lower the capital expenditures for researchers in industry and academia through as a \$17 million state-of-the-art facility.



Advanced Biofuels/ Bioproducts Process Development Unit (ABPDU)

Lawrence Berkeley National Lab




Driven by passion for bio-innovation

Since 2012, the Advanced Biofuels/ Bioproducts Process Development Unit (ABPDU) has helped businesses successfully take bio-innovation to market.



Bio-innovation Incubator and Proving Ground

Businesses optimize and scale technologies to enable commercialization of bio-based chemicals, materials, and fuels. Biomass evaluation, experimenting with microorganisms, optimizing processes, and performing assays and analysis.

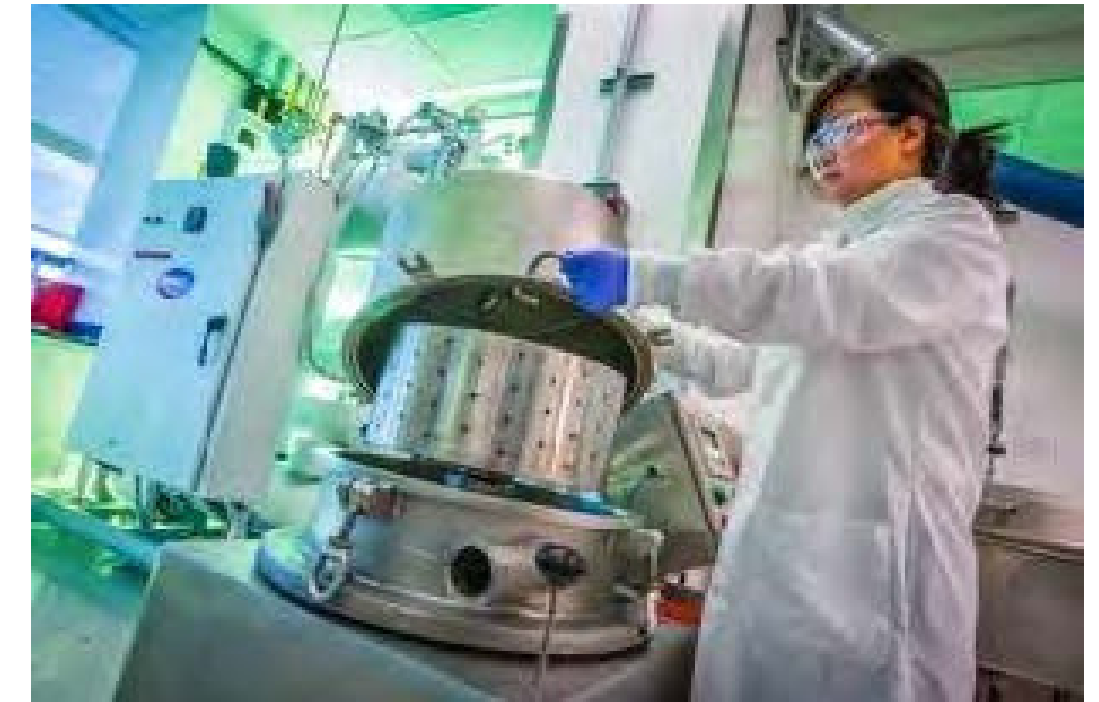

Research Areas:

- Fermentation
- Purification & Advanced Recovery
- Feedstock Deconstruction (including Pretreatment and Saccharification)
- Analytical Chemistry
- Materials Handling & Solids Characterization
- Techno-Economic analysis

Advanced Biofuels/ Bioproducts Process Development Unit (ABPDU)

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Industrial & Agricultural Innovation	Biomass/Biofuels/Bioprocess Deconstruction Pretreatment & Saccharification testing. Available test setups include: <ul style="list-style-type: none">• 2L IKA Reactor• 10L Parr Reactor• 10L Basket Centrifuge• 50L IKA SPP50 Reactors• 210 L Andritz Hastelloy Reactor• 10L Basket Centrifuge• 6m³/hr Andritz Decanter Centrifuge
Industrial & Agricultural Innovation	Biomass/Biofuels/Bioprocess Fermentation testing. Available test setups include: <ul style="list-style-type: none">• 250 mL Ambr Sartorius Reactors• 500 mL HEL Bioreactors for gas and pressurized studies• 2L Reactors• 20L HEL Bioreactor for gas and pressurized studies• 50L ABEC Bioreactor• 300L ABEC Bioreactor
Industrial & Agricultural Innovation	Biomass/Biofuels/Bioprocess Purification & Advanced Recovery testing. Available test setups include: <ul style="list-style-type: none">• 2L Liquid-Liquid Extraction Karr Column• ÄKTA Avant 150 Chromatography• Millipore Tangential Flow Filtration• Qsonica-Q700 Sonicator• Rotovap Distiller• Labonco Lyophilizer

Advanced Biofuels/ Bioproducts Process Development Unit (ABPDU)

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Industrial & Agricultural Innovation	Biomass/Biofuels/Bioprocess Analytical Chemistry & Solids Characterization testing. Available test setups include: <ul style="list-style-type: none">• Gas Chromatography• Analytical Rheometer• High-Performance Liquid Chromatography• Analytical-Ysi Gas Analyzer• High-Performance Anion Exchange Chromatography• Analytical Rheometer
Industrial & Agricultural Innovation	Using software tools and team expertise to characterize process flows and economics incorporating development data and commercial assumptions
Renewable Generation	Biomass/Biofuels/Bioprocess Deconstruction Pretreatment & Saccharification testing. Available test setups include: <ul style="list-style-type: none">• 2L IKA Reactor• 10L Parr Reactor• 10L Basket Centrifuge• 50L IKA SPP50 Reactors• 210 L Andritz Hastelloy Reactor• 10L Basket Centrifuge• 6m³/hr Andritz Decanter Centrifuge
Renewable Generation	Biomass/Biofuels/Bioprocess Fermentation testing. Available test setups include: <ul style="list-style-type: none">• 250 mL Ambr Sartorius Reactors• 2L Reactors• 50L ABEC Bioreactor• 300L ABEC Bioreactor• 15L Bioengineering Bioreactor

Advanced Biofuels/ Bioproducts Process Development Unit (ABPDU)

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Renewable Generation	Biomass/Biofuels/Bioprocess Purification & Advanced Recovery testing. Available test setups include: <ul style="list-style-type: none">• 2L Liquid-Liquid Extraction Karr Column• ÄKTA Avant 150 Chromatography• Millipore Tangential Flow Filtration• Qsonica-Q700 Sonicator• Rotovap Distiller• Labonco Lyophilizer
Renewable Generation	Biomass/Biofuels/Bioprocess Analytical Chemistry & Solids Characterization testing. Available test setups include: <ul style="list-style-type: none">• Gas Chromatography• Analytical Rheometer• High-Performance Liquid Chromatography• Analytical-Ysi Gas Analyzer• High-Performance Anion Exchange Chromatography• Analytical Rheometer
Renewable Generation	Biomass evaluation, experimenting with microorganisms, optimizing processes, and performing assays and analysis
Renewable Generation	Using software tools and team expertise to characterize process flows and economics incorporating development data and commercial assumptions

Advanced Light Source (ALS)

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov


W: <https://als.lbl.gov>



The ALS is a national user facility open to scientists around the world and provides tools for exploring the properties of materials using x-rays, infrared and extreme ultraviolet light. It serves over 2,000 users per year working on research related to energy, the earth & environment, materials, biology, chemistry, and physics.




Access to the ALS is through a peer-reviewed proposal process and can accommodate non-proprietary work (for free) and proprietary work (for a fee). Access mechanisms include general user proposals accepted twice a year, rapid access for time-critical work, and approved program access for longer-term collaborative studies.

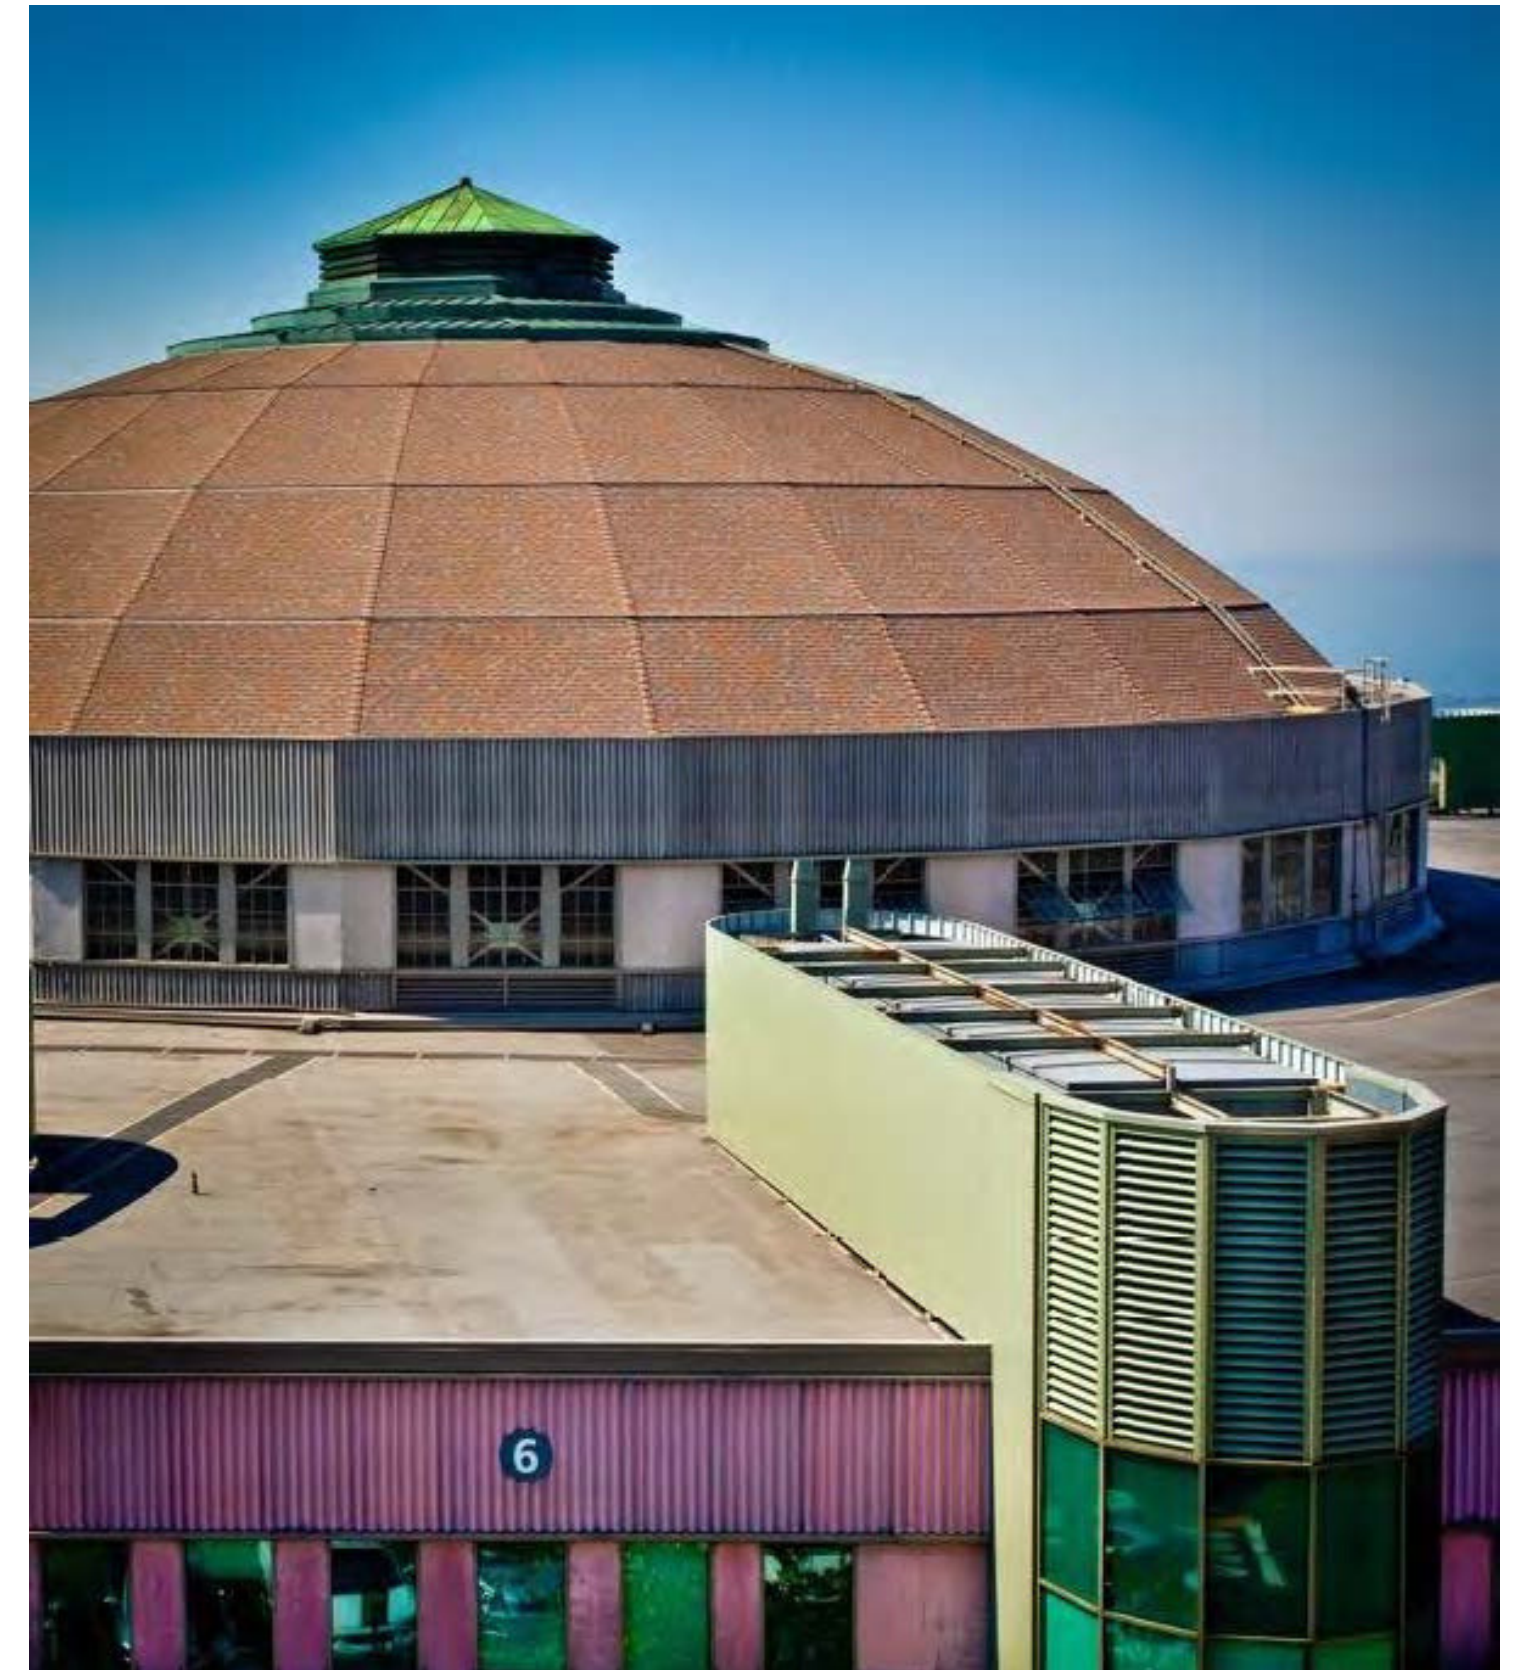


Advanced Light Source (ALS)

Lawrence Berkeley National Laboratory

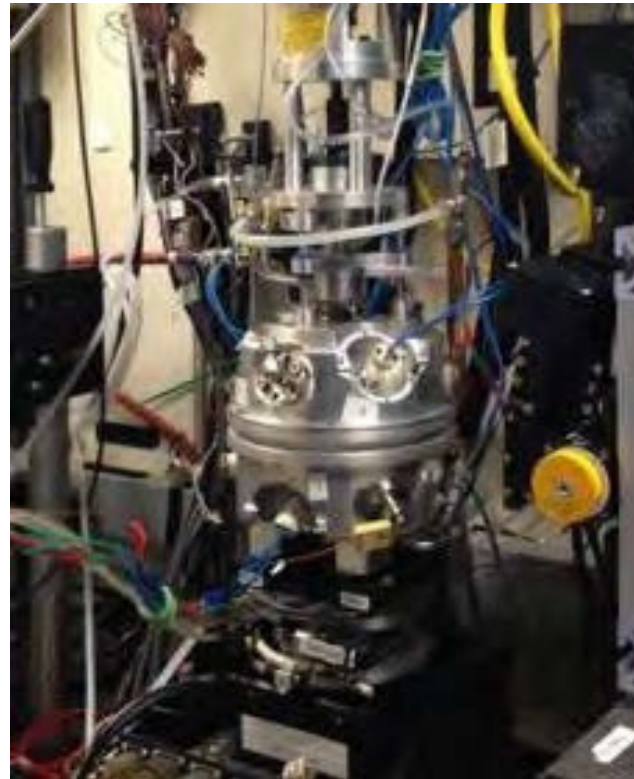


Use techniques to measure the physical and chemical morphology of materials

- 3D computed tomography and crystallography with micrometer resolution of functional materials and devices
- Scanning transmission x-ray microscopy with nanometer-scale resolution of energy and functional materials under operando conditions
- Scattering techniques to study the structure of organic materials and polymers

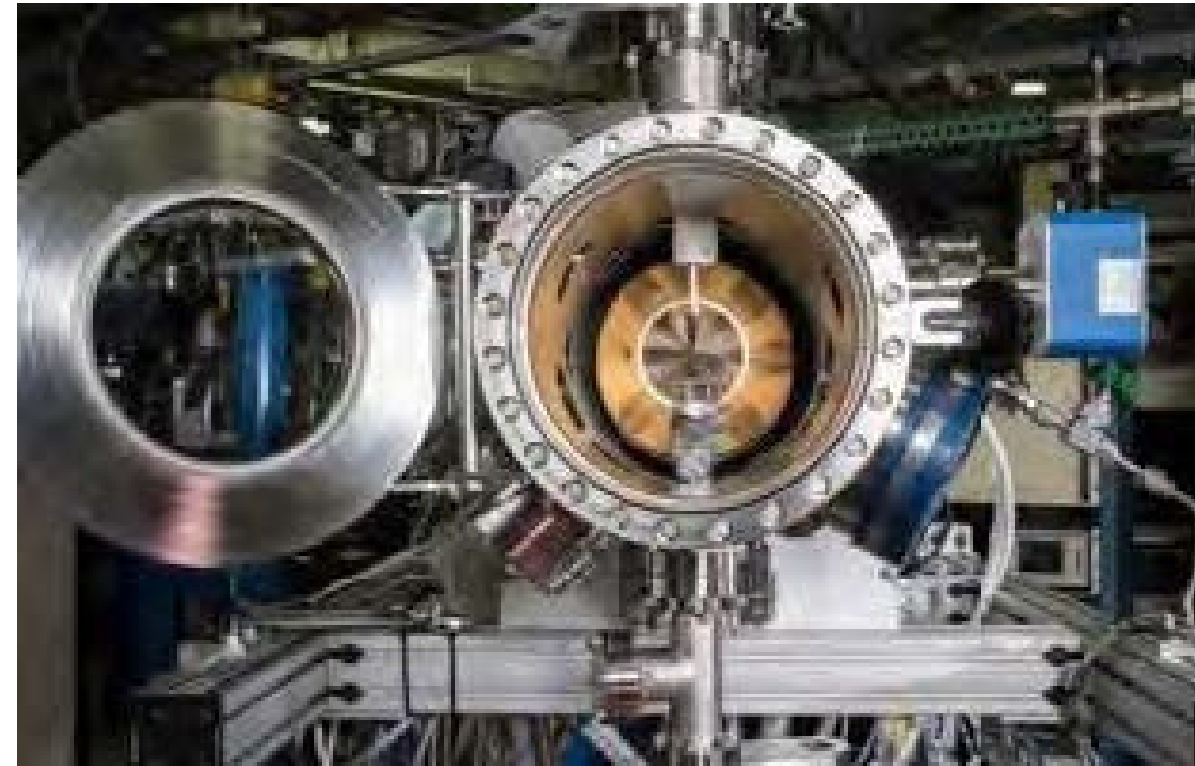

Follow chemical processes under operando conditions

- Operando x-ray spectroscopy of solar cell, battery, and fuel cell materials
- Ambient-pressure photoelectron spectroscopy of the solid-gas and solid-liquid interlayer to study catalytic and electrochemical processes

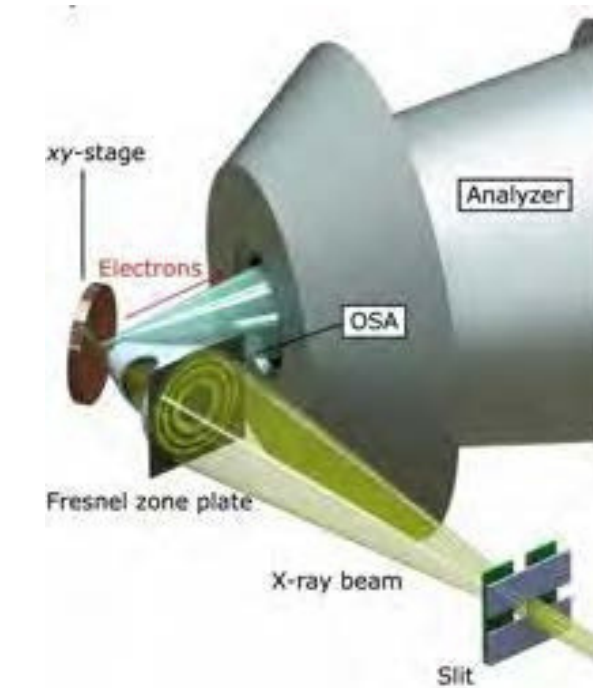

Measure fundamental materials properties

- Photoelectron spectroscopy of quantum materials and materials for computing applications
- Surface microscopy with nanometer-scale resolution, and chemical and magnetic sensitivity
- Nanometer-resolved infrared spectroscopy for chemical and electronic structure measurements

Advanced Light Source (ALS)

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Material-Based	<ul style="list-style-type: none">• Spectroscopy – tests include study of the energies of particles that are emitted or absorbed by samples that are exposed to the light-source beam and commonly used to determine the characteristics of chemical bonding and electron motion.
Material-Based	<ul style="list-style-type: none">• Microscopy/Imaging – tests can obtain pictures with fine special resolution of the samples under study. Used in a diverse number of research areas.
Material-Based	<ul style="list-style-type: none">• Scattering/Diffraction – tests study patterns of light produced when x-rays are deflected by the closely spaced lattice of atoms in solids and commonly.Used to determine the structures of crystals and large molecules such as proteins.

Chu Hall (B30) – Solar Fuels Labs

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov


Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov

W: <https://solarfuelshub.org>, H2awsm.org



Home to largest research program in the U.S. dedicated to creating scalable technology that converts carbon dioxide, water, and sunlight into renewable transportation fuels.



Leading scientific advanced toward solar hydrogen generation systems, carbon dioxide reduction and production of energy-dense fuels.




Supporting distributed Energy Resources (DERs) through advancing the understanding of catalytic mechanisms, materials discovery, and demonstrating prototypes.



Chu Hall (B30) – Solar Fuels Labs

Lawrence Berkeley National Lab

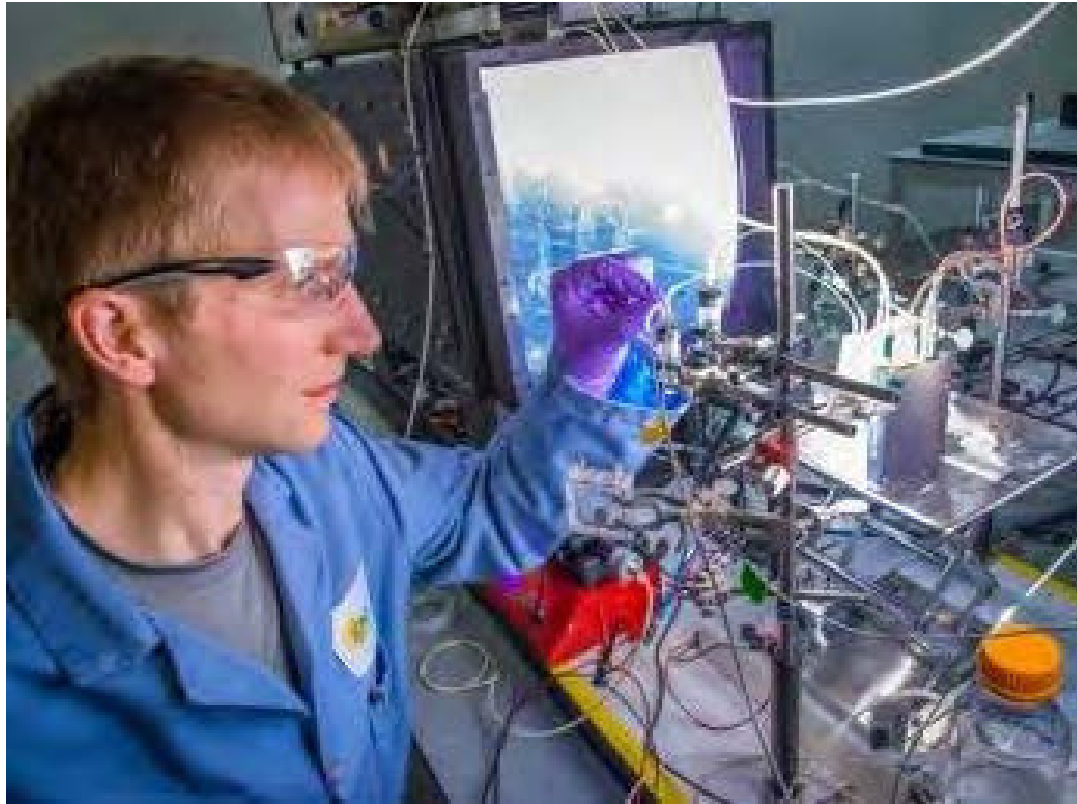

Small Businesses and Start Ups

Small businesses and start ups can advance their technologies to contribute to a new generation of sustainable, scalable source of energy-dense chemical fuels.



Partner with our labs to:

- Advance solar-energy-to-fuels components for key processes including light capture, energy transfer, electron transport and charge separation
- Discover electrocatalytic and photo electrocatalytic material and light-absorber photoelectrodes
- Use test-bed prototypes to determine practicality of prototype solar-fuels systems



Capitalize on the local scientific community at LBNL and the Bay Area

With approval from DOE, the Solar Fuels programs will work with you to access the expertise, equipment, and labs needed to achieve your goals.

Chu Hall (B30) – Solar Fuels Labs

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Material-Based	<ul style="list-style-type: none">• Solar fuels – tests include:<ul style="list-style-type: none">◦DFT and Ab Initio Calculations for Water Splitting Including Real-Time Time-Dependent Density Functional Theory◦In-Situ and Operando Nanoscale Characterization Capabilities for Photoelectrochemical Materials and Integrated Assemblies◦Laboratory and On-Sun PEC Device Testing◦Microelectrode Testing of LTE Electrocatalysts, Ionomers, and their Interactions in the Solid State◦Multiscale Modeling of Water-Splitting Devices◦Photoelectrochemical Device Fabrication Facility◦Photoelectrochemical Device In Situ and Operando Testing Using X-Rays◦Photophysical Characterization of Photoelectrochemical Materials and Assemblies◦Probing and Mitigating Chemical, Electrochemical, and Photochemical Corrosion of Electrochemical and Photoelectrochemical Assemblies◦Prospective LCA Model for 1-GW Scale PEC Hydrogen Plant◦Real-World Modeling of PEC Devices◦Thin Film and Bulk Ionomer Characterization

Joint BioEnergy Institute (JBEI)

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov

W: <https://jbei.org>



JBEI collaborates with industry and small businesses to accelerate development of emerging cellulosic biofuels and renewable chemicals.



JBEI has a network of collaborators and licensees comprised of approximately 50 companies, with six spin-off start-ups to date.



Produce clean, sustainable, carbon-neutral biofuels and bioproducts by utilizing JBEI's capabilities.



Joint BioEnergy Institute (JBEI)

Lawrence Berkeley National Lab



Working with Small Business is JBEI's Priority

Advancing alternative energy sources through exploration of plant systems biology, cell wall biosynthesis, grass genetics, and cell wall engineering.

Deconstruct to advance technology through biomass pretreatment, enzyme optimization, fungal biotechnology, and microbial communities.



Advanced Biofuel and Bioproduct Technologies

Use the latest techniques in molecular biology and chemical and genetic engineering to develop new biological systems, processes, and technologies.

Advanced tools in molecular biology and chemical engineering, including computational and robotic technologies.



Research Areas:

- Life-Cycle, Economics, and Agronomy
- Feedstocks
- Deconstruction
- Biofuels and Bioproducts
- Labs, Computational, and Information System Technology

Joint BioEnergy Institute (JBEI)

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Renewable Generation	<ul style="list-style-type: none">• Biomass / Biofuels – tests include:<ul style="list-style-type: none">◦Inventory of Composable Elements (ICE), a cloud-based open-source DNA part, plasmid, microbial strain, and Arabidopsis seed repository◦VectorEditor, a DNA editing and annotation tool◦DeviceEditor, a biological computer-aided design canvas◦j5, a cloud-based DNA assembly protocol design automation◦PR-PR, a open-source laboratory automation programming platform.◦MASCP Gator, a proteomics aggregation utility◦1001 Proteomes, a simple way to browse changes to proteins◦Plant Protein Alignment and PhosphorylationResource◦Technoeconomic Model Wiki, models of various aspects of lignocellulosic biofuel production◦Rice Oligonucleotide Array Database (ROAD), a resource for gene expression and coexpression analysis in rice◦RiceNet, a probabilistic functional gene network◦Rice Glycosyl Hydrolase Database, Rice Kinase Database, and Rice◦GT Database, to integrate and host functional genomic information◦Directory of Databases for Plant Cell Wall-Related Enzymes◦JBEI GT Collection, to drive basic scientific understanding of GTs◦MaxBin software package◦Targeted Proteomic toolkit for Escherichia coli proteins

The Materials Project

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov

W: <https://materialsproject.org>



The Materials Project aims to remove guess work from materials design in a variety of applications.



A supercomputing partnership cluster provides infrastructure that enables computations, data, and algorithms to run at unparalleled speed.




Thanks to supercomputing, predictability of new materials is now possible without material synthesis in the lab. Identify new materials for DER and energy efficient applications.



The Materials Project

Lawrence Berkeley National Lab

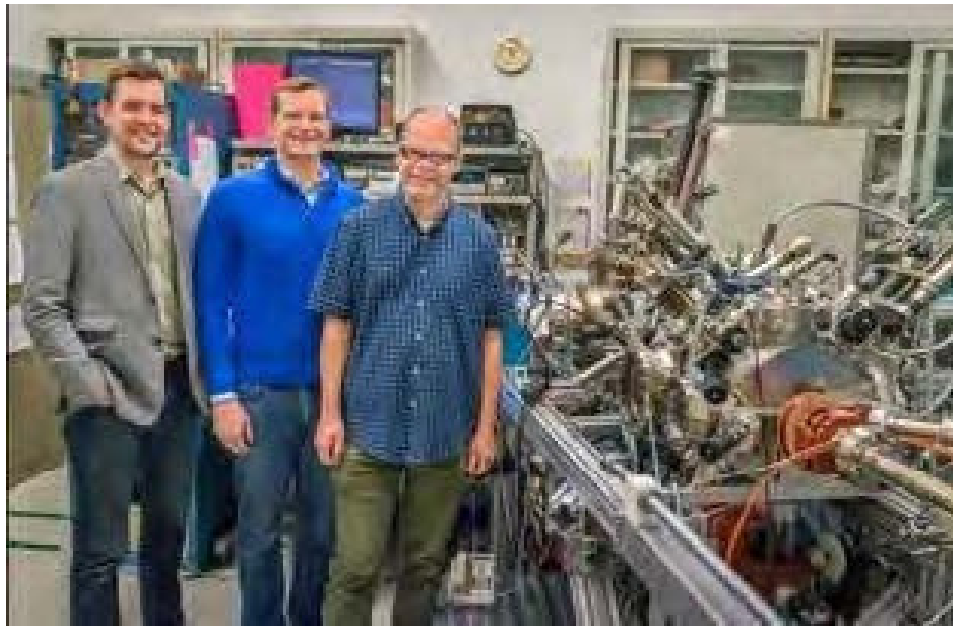


Small Businesses and Start Ups

Small businesses and start ups can discover new materials for a variety of applications including batteries, thermoelectric, and corrosion resistances.



Powerful software, supercomputers, and screening:

- Provides open web-based access to computed information on known and predicted materials
- Provides powerful analysis tools to inspire and facilitate design of novel materials
- Harnesses the power of supercomputing and state-of-the-art electronic structure methods

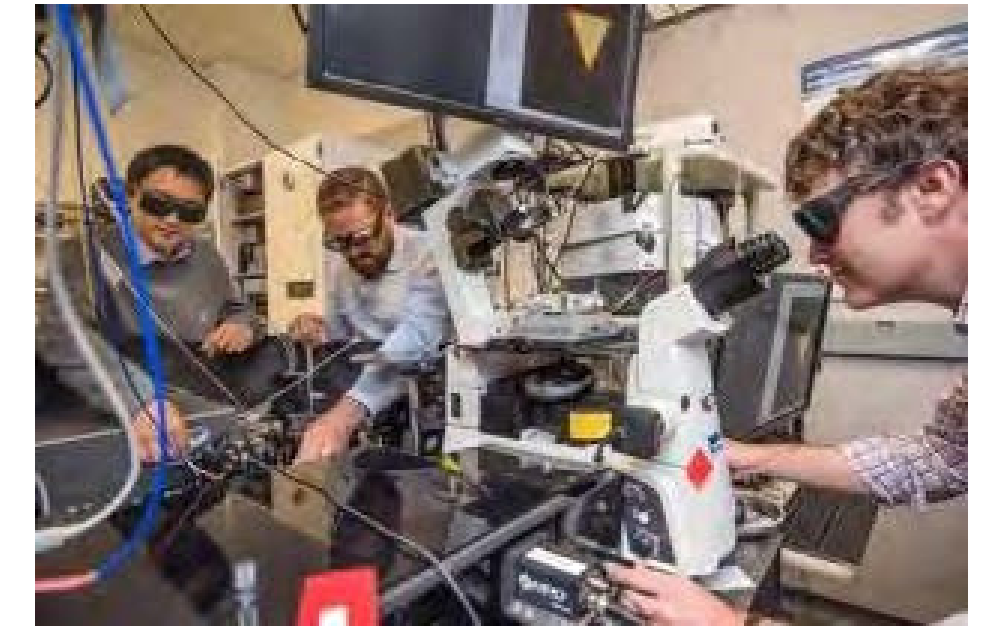

Partner with the Materials Project to:

- Data-mine scientific trends in materials properties for production and scale up
- Use high throughput tools to synthesize and characterize materials
- Use machine learning to predict materials properties and local environments to accelerate the innovation cycle

The Materials Project

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Material-Based	<ul style="list-style-type: none">• Materials characterization, modeling, synthesis – tests capabilities include:<ul style="list-style-type: none">◦Search material information by chemistry, composition, or property◦Explore batteries and their candidate materials. Get voltage profiles and oxygen evolution data◦Stability visualization – generate phase and pourbaix diagrams to find stable phases and study reaction pathways◦Invent structures – design new compounds with the structure editor and substitution algorithms◦Calculate – enthalpy of 10,000+ reaction and compare with experimental value

The Molecular Foundry

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area
P: 510.486.4540
E: AWard@lbl.gov

Principal Investigator

Cindy Regnier, P.E.
Executive Director
FLEXLAB
P: 510.486.7011
E: CMRegnier@lbl.gov


W: <https://foundry.lbl.gov>



A National User Facility supported by the Department of Energy Office of Basic Energy Sciences through their Nanoscale Science Research Center program.



Organized into seven interdependent research facilities that support crosscutting scientific themes, the Foundry provides access to state-of-the-art instrumentation, laboratories, unique scientific expertise, and specified techniques to help users address big challenges.




Foundational in helping small businesses and early stage companies develop materials and devices for Distributed Energy Resources (DER) advancement.



The Molecular Foundry

Lawrence Berkeley National Lab

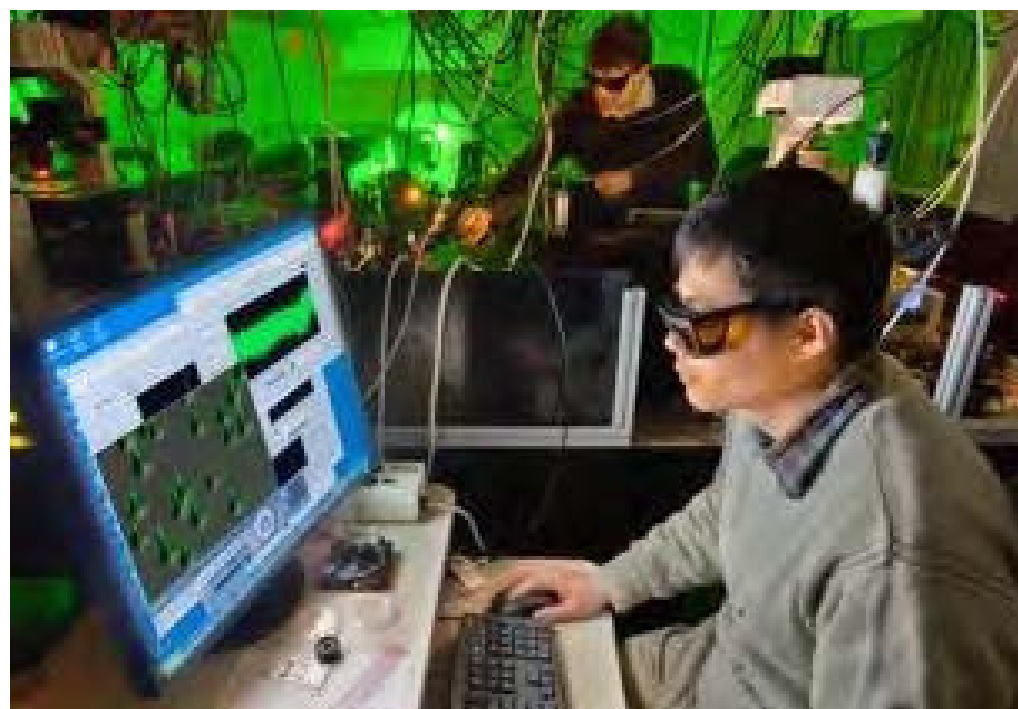

The Molecular Foundry's vision:

To provide multidisciplinary communities the opportunity to develop, probe, understand, and control matter and its behavior at fundamental length scales to address the most important technological challenges in energy, the environment, and beyond.



Discover New Materials

Examples of work in advancing new materials includes re-engineering of organisms, creating new biomolecules to interface with devices, electro-chemical energy storage, and super hydrophobic/hydrophilic surface modifications.



Capitalize on the local scientific community at LBNL and the Bay Area

The Foundry will work with users to access other facilities needed to achieve their goals.

Access to the Foundry is provided by a competitive, peer reviewed process and if users intend to publish the outcome, there is no charge to use the facility.

The Molecular Foundry

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Material-Based	<ul style="list-style-type: none">• State of the Art Electron Microscopes – tests include:<ul style="list-style-type: none">◦Characterization of materials at high (0.5Å) resolution; Other capabilities include: in-situ nanoindentation; spin-polarized low-energy microscopy; and tomography
Material-Based	<ul style="list-style-type: none">• Imaging and Manipulation of Nanostructures – tests include:<ul style="list-style-type: none">◦Create and utilize the newest tools and techniques in electron, optical and scanning probe microscopy to enable multi-modal observations at the nanoscale
Material-Based	<ul style="list-style-type: none">• Nanofabrication – tests include:<ul style="list-style-type: none">◦Examine fundamental nanofabrication processes and understand nanoscale structures on ultrafast timescales◦Expertise in single digit nanofabrication, nanoimprint lithography, integrating multi-modal optical devices, and creating thin films to control exciton flow
Material-Based	<ul style="list-style-type: none">• Theory of Nanostructured Materials – tests include:<ul style="list-style-type: none">◦Connect structural and dynamical properties of materials to their functions using advanced electronic structure theory, excited-state methods, model Hamiltonians, and statistical mechanical models
Material-Based	<ul style="list-style-type: none">• Inorganic Nanostructures – tests include:<ul style="list-style-type: none">◦Prepare, characterize and utilize carbon and semiconductor nanostructures, and use these materials in functional, multi-component devices◦High-throughput, combinatorial robotic synthesis of nanocrystals and molecular metal chalcogenide clusters
Material-Based	<ul style="list-style-type: none">• Biological Nanostructures – tests include:<ul style="list-style-type: none">◦Develop sequence-defined, bioinspired polymers, biocompatible imaging probes, and functionalized nanocrystals◦Synthetic biology techniques are used re-engineer organisms and create hybrid biomolecules to interface with devices
Material-Based	<ul style="list-style-type: none">• Organic and Macromolecular Structures – tests include:<ul style="list-style-type: none">◦Synthesize and utilize porous soft, hard, and hybrid materials as bulk solids, thin films, or in confined geometries.

Fuel Cell and Electrolyzer Research & Testing Facility

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program and Business Development Lead
Energy Technologies Area

P: (510) 486 4540

E: AWard@lbl.gov


W: <https://ecg.lbl.gov>

Principal Investigator

Cindy Regnier, P.E
Executive Director
FLEXLAB

P: (510) 486-7011

E: CMRegnier@lbl.gov

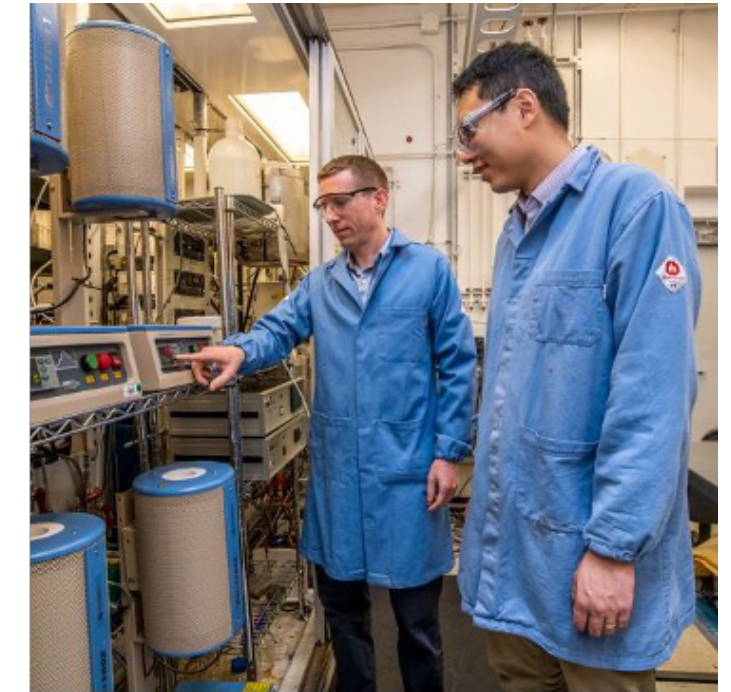

- The LBNL fuel cell and electrolyzer research and test facility, operated by the Energy Conversion Group, has a complete set of capabilities from fabrication to the testing of membrane electrode assemblies for low and high temperature fuel cells and electrolyzers.

- Utilizes a science of manufacturing approach to characterize and tune performance starting at fabrication and couple multiscale modeling with parametric experiments to study complex mass transport and kinetic phenomena in energy-conversion devices.




- Employs state-of-the-art diagnostics capabilities and parametric studies of electrocatalysts, polymer electrolytes and ionomer films, kinetics, and mass transport at the discrete material and cell level.



Fuel Cell and Electrolyzer Research & Testing Facility


Lawrence Berkeley National Lab

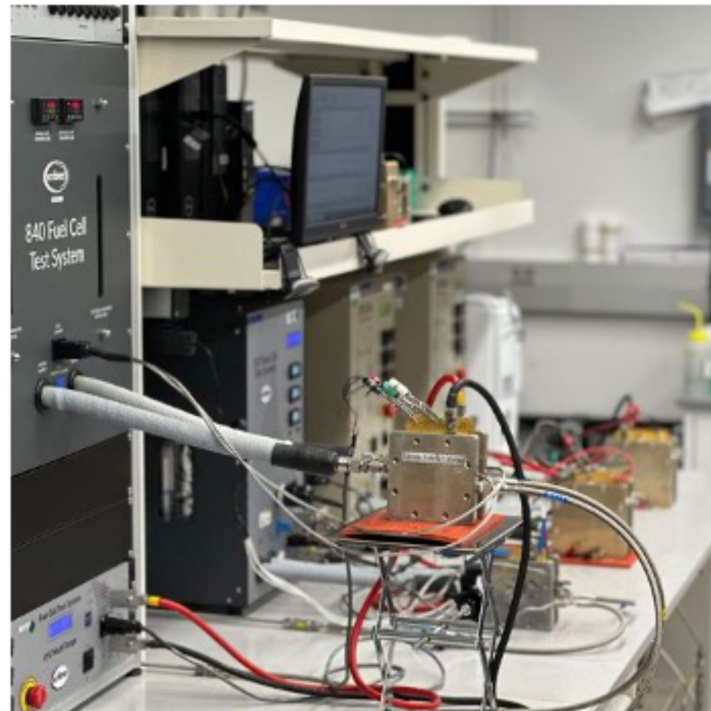

Fabrication facilities for making membrane electrode assemblies that can be tested across multiple fuel cell and electrolyzer testing stations capable of currents up to 200 A and cell sizes between 1 and 50 cm² at low and



Capability of coupling multiscale modeling with model experimental studies for diagnostics of kinetics and transport phenomena at various length scales for fuel cell, electrolyzers, and other electrochemical energy devices.

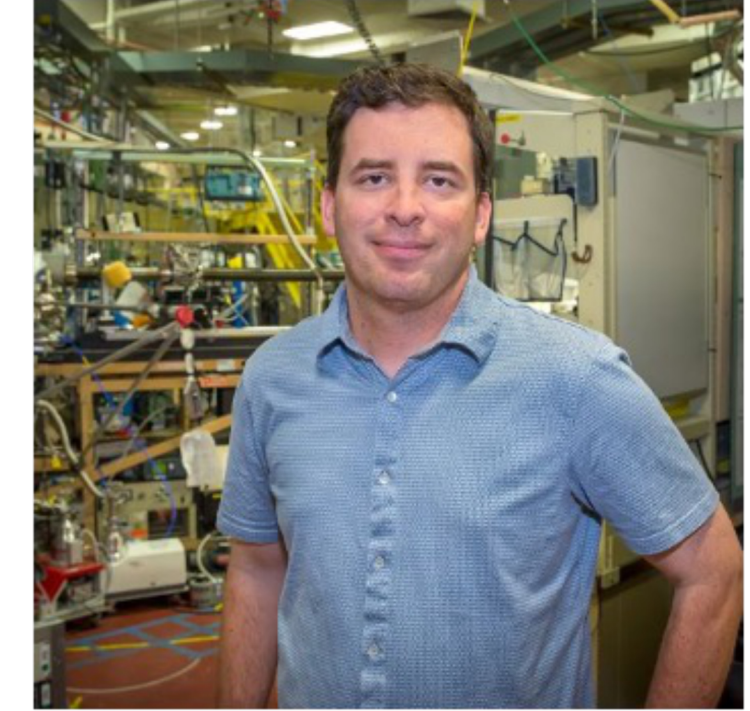

The team performs joint research with colleagues across the LBNL campus with experience and access to the Advanced Light Source and Molecular Foundry.

Fuel Cell and Electrolyzer Research & Testing Facility

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Renewable Generation	<p>Testing of most fuel cells and electrolyzers, flow batteries and regenerative fuel cells (CO₂R, PEM, AEM and SOFC). Tests include:</p> <ul style="list-style-type: none">• Multiscale, multiphysics modeling• Electrode fabrication (ultrasonic spray coating, doctor blade, infiltration, hot pressing, tape casting)• Electrochemical performance of electrocatalysts (rotating disk electrode, microelectrode)• Electrochemical performance of membrane-electrode assemblies and solid-oxide cells (AC/DC techniques, polarization curves)• Test stations with humidity, potential/current, gas flow, product analysis, and temperature control• Durability (accelerated stress-testing)
Material-Based	<p>Testing of energy-conversion components include:</p> <ul style="list-style-type: none">• Characterization and diagnostics of energy-conversion components include:• Ionomer and Separator Membranes: Water Uptake & Diffusion, Swelling, Anion/Cation conductivity, Gas permeation• Dispersions and Inks: Particle-size distribution, catalyst-ink interactions, Isothermal Calorimetry, Acoustic• Analyzer• Interfaces and Thin films: Polymer-catalyst interactions, Thin Film fabrication on support, Swelling and Transport• in Ionomer Films• Mechanical-Thermal response: Thermal Decomposition, Uniaxial Tensile / Compression, 3-point bending, Adhesion• Test, Creep and Relaxation, Fatigue (Instron, DMA, Custom-compression setups)• Physical and Chemical Characterization: SEM, TEM, XPS, XRD, XRF, FTIR, AFM• X-ray Structural Characterization: SAXS/WAXS (Small/Wide-angle X-ray Scattering), XCT (micro X-ray Computed Tomography), XPS (X-ray Photoelectron Spectroscopy)

Geosciences Measurement Facility (GMF)

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program & Business Development Lead
Energy Technologies Area
P: (510) 486 4540
E: AWard@lbl.gov

Principal Investigator

Michelle Robertson
GMF Program Manager
P: (510) 486 5096
E: MCRobertson@lbl.gov

W: gmf.lbl.gov



The Geosciences Measurement Facility team specializes in designing, building, testing, and deploying customized earth and environmental science instrumentation for lab and field experiments



GMF designs solutions to enable multi-scale scientific observations within and across all Earth system compartments: Atmospheric, Terrestrial, Subsurface and Ocean



GMF collaborates with national and international partners in academia and industry across Geothermal Energy, Geological Carbon Sequestration and Climate and Ecosystems projects.




Geosciences Measurement Facility (GMF)

Lawrence Berkeley National Lab



GMF develops new technologies to monitor and to improve the efficiency of deep earth fluid manipulations. Our instrumentation solutions have contributed to hundreds of peer-reviewed science publications and have been recognized with multiple R&D100 awards.

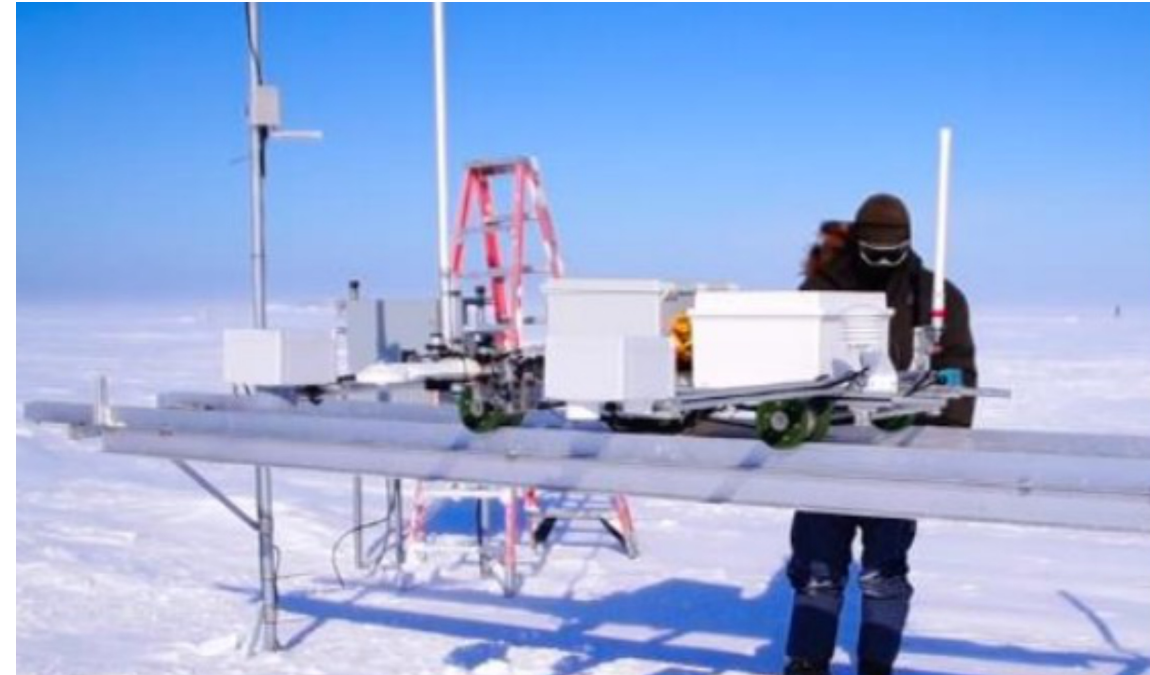

GMF engineers and technologists work alongside their scientific research partners at Berkeley Lab and at field observatory sites worldwide to bring to life custom solutions that push the frontier of Earth science discovery.



GMF's advanced instrumentation designs have been critical to addressing scientific questions and challenges surrounding ecosystem health, watershed function, atmospheric systems, carbon sequestration, bioenergy, geothermal resources and ocean behavior.

Geosciences Measurement Facility (GMF)

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Renewable Generation	<ul style="list-style-type: none">• Advanced geophysical technologies in application to improve Enhanced Geothermal Systems (EGS) efficiency in converting heat to electricity :<ul style="list-style-type: none">◦Unique probes dedicated to direct monitoring of natural fractures seismic movements at large depths◦Special optical fibers to remotely detect anthropogenic earthquakes◦Intelligent systems dedicated to the active imaging of industrial fluid injection leakage.
Water Technologies	<ul style="list-style-type: none">• Shallow geophysical technologies to assess the impacts of climate change and the impact of waterflow-based technologies on terrestrial ecosystem dynamics :<ul style="list-style-type: none">◦Developing distributed fiber sensing networks capable of remotely detecting the presence of groundwater.◦Multimodal instrumentation to track changes in ocean ecosystems

Agile BioFoundry (ABF)

Lawrence Berkeley National Lab

Address

1 Cyclotron Road
Berkeley, CA 94720

Ombudsperson

Alecia Ward
Program & Business Development Lead
Energy Technologies Area

P: (510) 486 4540

E: AWard@lbl.gov

W: gmf.lbl.gov

Principal Investigator

Principal Investigator
Cindy Regnier, P.E
Executive Director
FLEXLAB

P: (510) 486-7011


E: CMRegnier@lbl.gov



A consortium of seven national laboratories dedicated to accelerating biomanufacturing




Partnering with industry to develop pathways to sustainable biochemicals and aviation fuels

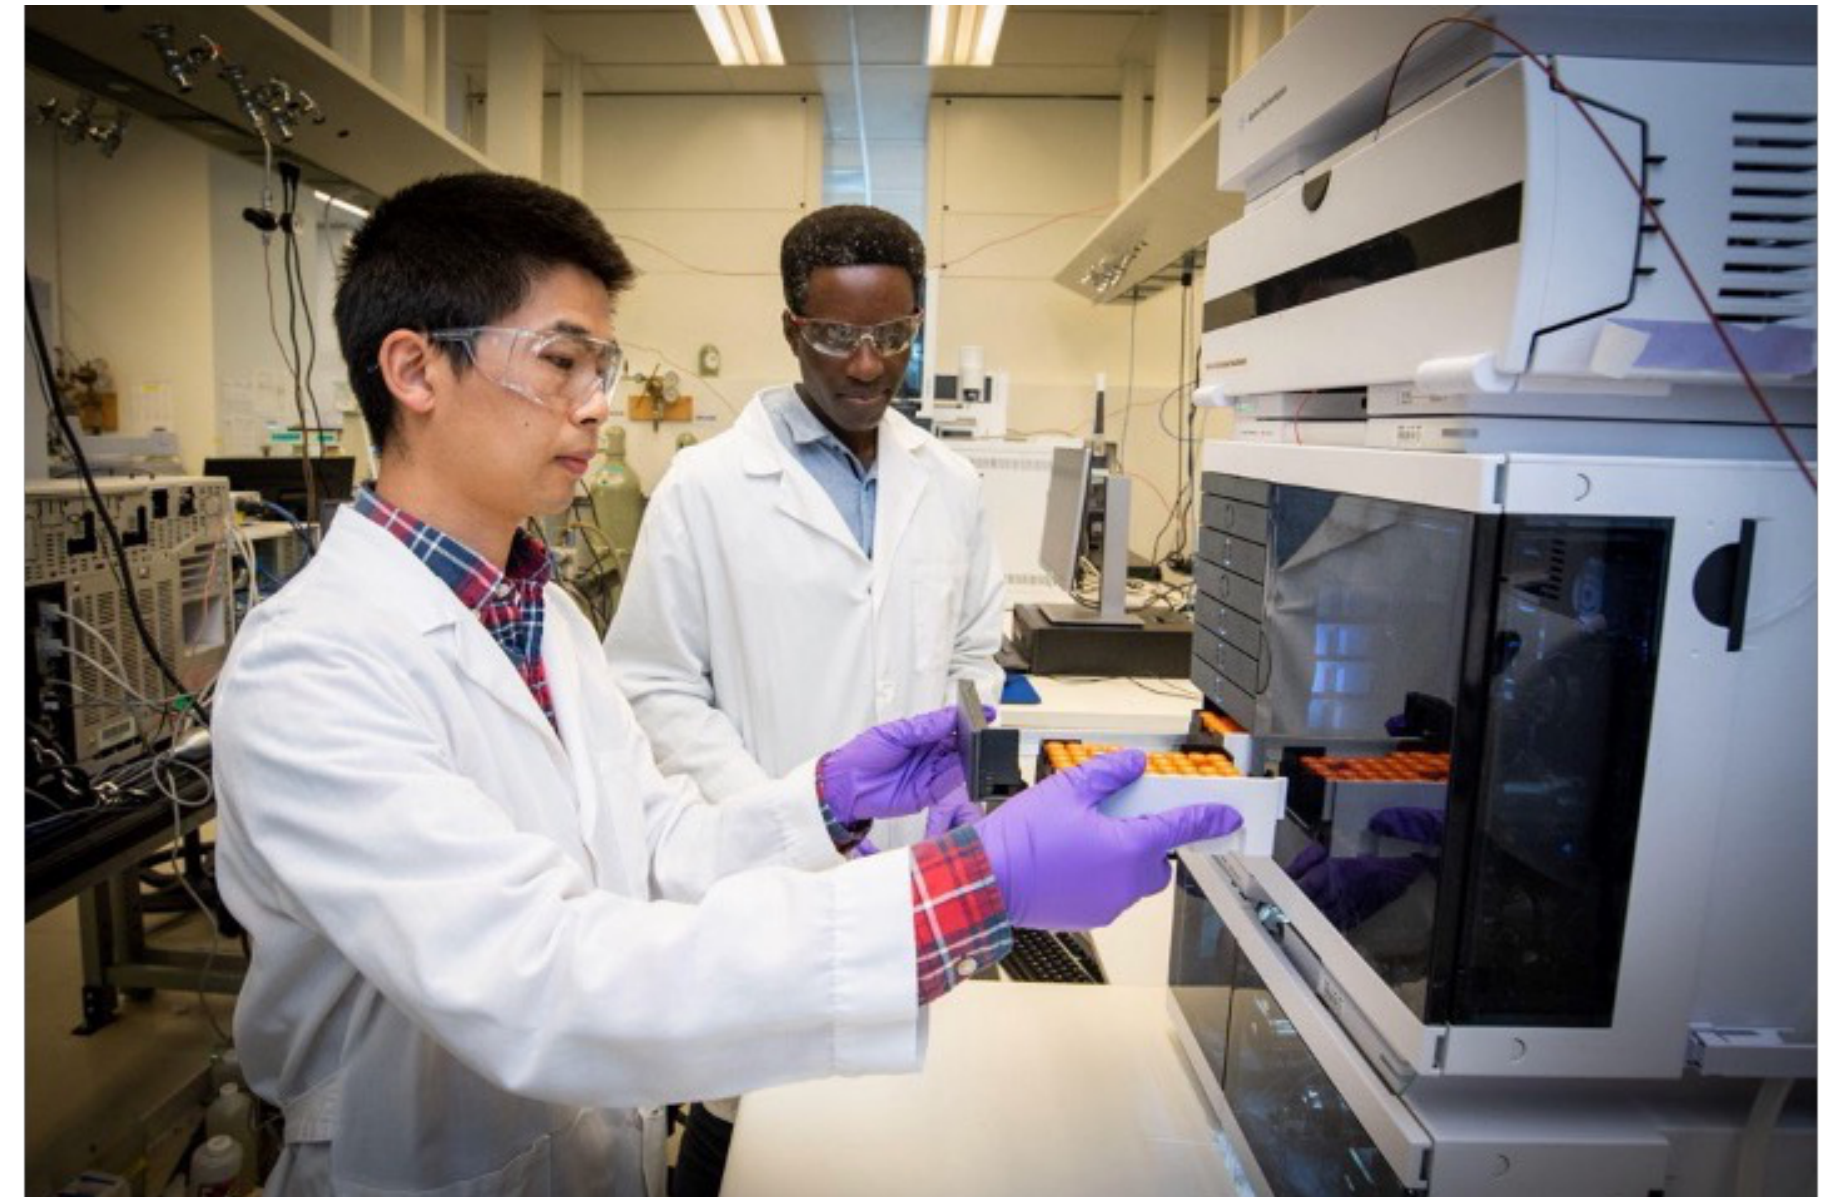

Agile BioFoundry (ABF)

Lawrence Berkeley National Lab

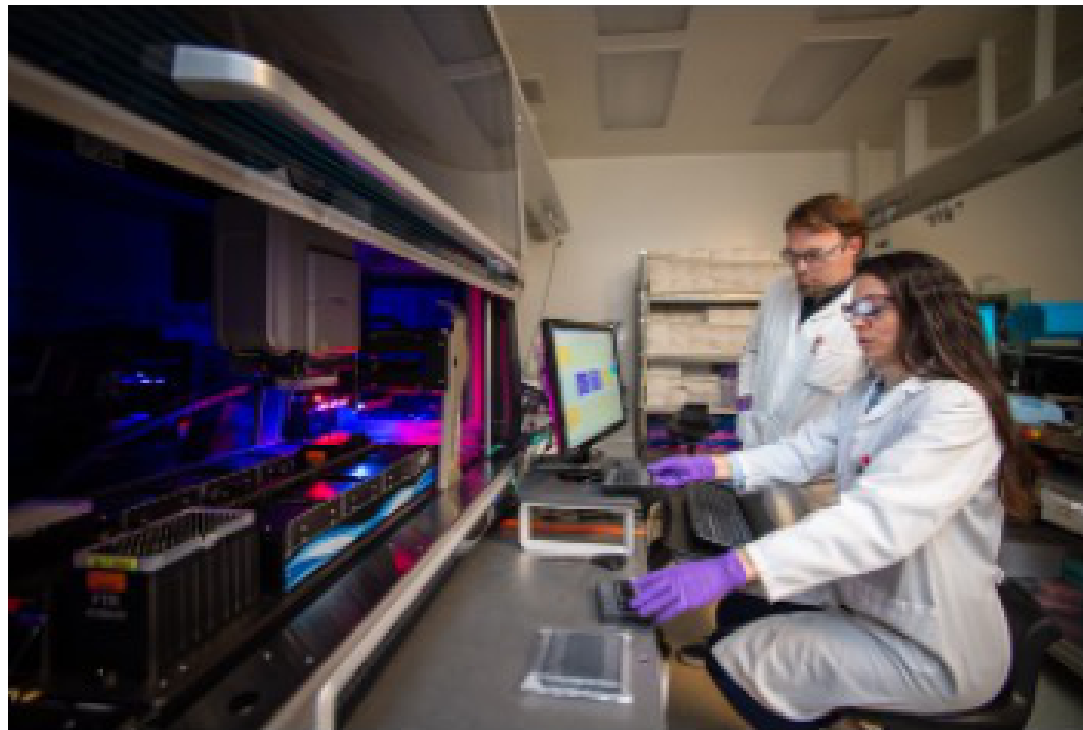

Partnering with the biomanufacturing industry

Developing pathways to sustainable biochemicals and aviation fuels



Advanced biomanufacturing technologies

Core biological engineering Design/Build/Test/Learn cycle infrastructure development and demonstration

Techno-economic and life cycle analyses for exemplar molecules



Onboarding hosts and improving titers, rates, and yields

Beachhead molecule establishment and flux enhancement

Onboarding and further development of industrially-relevant host microbes

Agile BioFoundry (ABF)

Lawrence Berkeley National Lab

Technology Type	Technology Capabilities
Renewable Generation	<ul style="list-style-type: none">• DIVA bioCAD• Pathway Design through Machine Learning• Computational Protein Design• Pathway Development and Evaluation• DIVA DNA Sequence Construction and Validation• Genetic Tools• Adaptive Laboratory Evolution• Microbioreactor Systems and Sampling Platform• High Throughput Screening• Riboregulators for Precise Control of Gene Expression• Biosensors• Experiment Data Depot• Targeted Metabolomics• Artificial Intelligence• Mechanistic Models• Pathway Analysis and Multi-Omics Data Visualization through AgileBioCyc

CalTestBed

a: 436 14th Street Suite 1220, Oakland, CA 94612

e: info@caltestbed.com

w: www.caltestbed.com



This document was prepared as a result of work sponsored by the California Energy Commission. It does not necessarily represent the views of the Energy Commission, its employees, or the State of California. Neither the Commission, the State of California, nor the Commission's employees, contractors, or subcontractors makes any warranty, express or implied, or assumes any legal liability for the information in this document; nor does any party represent that the use of this information will not infringe upon privately owned rights. This document has not been approved or disapproved by the Commission, nor has the Commission passed upon the accuracy of the information in this document.